



ویرا پرداز آروین پاسارگاد

با مدیریت خانم مهندس احمدی



جهت مشاوره

با کارشناسان فنی

با ما در ارتباط باشید



021 - 91001377



0935 125 90 98



Power Transmission Belt

Industrial Belt | Automotive Belt |
Agricultural Belt | Specialty Belt

DRB Power Transmission Belt

DRB Power Transmission Belt, essential for transferring power of various automotive, industrial, and agricultural machines over the world, have been accepted by customers as a synonymous term for quality and reliability for over half century. DRB Power Transmission Belt are used as essential parts to transfer power of machines and equipments used on wide range of products in both heavy and light industries alike. Various applications DRB Power Transmission Belt are used include, but not limited to, automotive, home and office appliances and equipment, chemicals, machinery, ships and farming equipments. DRB has steadily made improvements on product quality and developed products for diverse applications through development of various synthetic rubber, fiber, chemicals and their processing techniques.

Table of Content

Industrial Belt

| | |
|------------------------|----|
| Classical V-Belt | 6 |
| Narrow V-Belt | 14 |
| Joined V-Belt | 25 |
| V-Ribbed Belt | 33 |
| Timing Belt | 35 |

Automotive Belt

| | |
|---------------------|----|
| Raw Edge Belt | 40 |
| V-Ribbed Belt | 45 |
| Timing Belt | 52 |

Agricultural Belt

| | |
|----------------------------|----|
| Wrapped Belt | 56 |
| Raw Edge Cogged Belt | 60 |

Specialty Belt

| | |
|---------------------------|----|
| Double V-Belt | 64 |
| Round Belt | 66 |
| Open-ended V-Belt | 66 |
| FHP V-Belt | 67 |
| Variable Speed Belt | 70 |

| | |
|------------------------------|----|
| Minimum order quantity | 74 |
|------------------------------|----|

| | |
|--|----|
| Precautions for Installing & Using Industrial Belt | 76 |
|--|----|

| | |
|--|----|
| Precautions for Mounting and Using Automotive Belt | 79 |
|--|----|

Industrial Belt

Classical V-Belt

Narrow V-Belt

Joined V-Belt


V-Ribbed Belt

Timing Belt

Industrial Belt - Classical V-Belt

Wrapped Belt

V-shape belt with surface covered with fabrics.




Features

- Cover fabrics enhance durability by protecting inner parts.
- Specially designed cords enhance durability and length stability.
- Excellent in resistance against heat, oil and wear.
- Safe use is ensured by preventing static electricity.
- Enhances power transmission efficiency by reducing slip.

| Construction | Functions | Materials |
|-----------------------------|---|---|
| ❶ Cover fabric | Protects the inner parts of the belt and strong abrasion on the pulley groove | Cotton fabric, Polyester, Cotton synthetic fabric |
| ❷ Tension member | Primary material for transferring power | Polyester, Aramid |
| ❸ Top compression rubber | Maintains belt shape (upper) | NR, CR |
| ❹ Adhesive rubber | Supports and protects tension member adhesion | NR, CR |
| ❺ Bottom compression rubber | Maintains belt shape (lower) | NR, CR |

NR : Natural Rubber / CR : Chloroprene Rubber


Nominal Dimension



M Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| M 17(inch) | 1.78 | 0.025 | 435 | M 41 | 2.49 | 0.061 | 1044 |
| M 19 | 1.82 | 0.028 | 486 | M 42 | 2.53 | 0.062 | 1070 |
| M 20 | 1.84 | 0.030 | 511 | M 46 | 2.70 | 0.068 | 1171 |
| M 21 | 1.87 | 0.031 | 536 | M 47 | 2.75 | 0.070 | 1197 |
| M 22 | 1.89 | 0.033 | 562 | M 48 | 2.79 | 0.071 | 1222 |
| M 23 | 1.91 | 0.034 | 587 | M 50 | 2.89 | 0.074 | 1273 |
| M 24 | 1.94 | 0.036 | 613 | M 54 | 3.09 | 0.080 | 1375 |
| M 25 | 1.96 | 0.037 | 638 | M 55 | 3.14 | 0.081 | 1400 |
| M 27 | 2.02 | 0.040 | 689 | M 62 | 3.53 | 0.092 | 1578 |
| M 29 | 2.07 | 0.043 | 740 | M 63 | 3.59 | 0.093 | 1603 |
| M 30 | 2.10 | 0.044 | 765 | M 71 | 4.09 | 0.105 | 1806 |
| M 31 | 2.14 | 0.046 | 790 | M 81 | 4.80 | 0.120 | 2060 |
| M 32 | 2.17 | 0.047 | 816 | M 82 | 4.88 | 0.121 | 2086 |
| M 34 | 2.23 | 0.050 | 867 | M 83 | 4.96 | 0.123 | 2111 |
| M 35 | 2.27 | 0.052 | 892 | M 84 | 5.03 | 0.124 | 2137 |
| M 36 | 2.30 | 0.053 | 917 | M 87 | 5.27 | 0.129 | 2213 |
| M 40 | 2.45 | 0.059 | 1019 | M 90 | 5.52 | 0.133 | 2289 |

Nominal Dimension




A Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| A 24(inch) | 1.81 | 0.069 | 638 | A 65 | 4.84 | 0.188 | 1679 |
| A 26 | 1.96 | 0.075 | 689 | A 66 | 4.91 | 0.191 | 1705 |
| A 27 | 2.03 | 0.078 | 714 | A 67 | 4.98 | 0.194 | 1730 |
| A 28 | 2.11 | 0.081 | 739 | A 68 | 5.06 | 0.197 | 1755 |
| A 29 | 2.18 | 0.084 | 765 | A 69 | 5.13 | 0.200 | 1781 |
| A 30 | 2.26 | 0.087 | 790 | A 70 | 5.20 | 0.202 | 1806 |
| A 31 | 2.33 | 0.090 | 816 | A 71 | 5.28 | 0.205 | 1832 |
| A 32 | 2.41 | 0.093 | 841 | A 72 | 5.35 | 0.208 | 1857 |
| A 33 | 2.48 | 0.095 | 866 | A 73 | 5.42 | 0.211 | 1882 |
| A 34 | 2.55 | 0.098 | 892 | A 74 | 5.50 | 0.214 | 1908 |
| A 35 | 2.63 | 0.101 | 917 | A 75 | 5.57 | 0.217 | 1933 |
| A 36 | 2.70 | 0.104 | 943 | A 76 | 5.64 | 0.220 | 1959 |
| A 37 | 2.78 | 0.107 | 968 | A 77 | 5.71 | 0.223 | 1984 |
| A 38 | 2.85 | 0.110 | 993 | A 78 | 5.79 | 0.226 | 2009 |
| A 39 | 2.92 | 0.113 | 1019 | A 79 | 5.86 | 0.228 | 2035 |
| A 40 | 3.00 | 0.116 | 1044 | A 80 | 5.93 | 0.231 | 2060 |
| A 41 | 3.07 | 0.119 | 1070 | A 81 | 6.01 | 0.234 | 2086 |
| A 42 | 3.15 | 0.121 | 1095 | A 82 | 6.08 | 0.237 | 2111 |
| A 43 | 3.22 | 0.124 | 1120 | A 83 | 6.15 | 0.240 | 2136 |
| A 44 | 3.29 | 0.127 | 1146 | A 84 | 6.22 | 0.243 | 2162 |
| A 45 | 3.37 | 0.130 | 1171 | A 85 | 6.30 | 0.246 | 2187 |
| A 46 | 3.44 | 0.133 | 1197 | A 86 | 6.37 | 0.249 | 2213 |
| A 47 | 3.52 | 0.136 | 1222 | A 87 | 6.44 | 0.252 | 2238 |
| A 48 | 3.59 | 0.139 | 1247 | A 88 | 6.51 | 0.254 | 2263 |
| A 49 | 3.66 | 0.142 | 1273 | A 89 | 6.59 | 0.257 | 2289 |
| A 50 | 3.74 | 0.145 | 1298 | A 90 | 6.66 | 0.260 | 2314 |
| A 51 | 3.81 | 0.147 | 1324 | A 91 | 6.73 | 0.263 | 2340 |
| A 52 | 3.88 | 0.150 | 1349 | A 92 | 6.80 | 0.266 | 2365 |
| A 53 | 3.96 | 0.153 | 1374 | A 93 | 6.88 | 0.269 | 2390 |
| A 54 | 4.03 | 0.156 | 1400 | A 94 | 6.95 | 0.272 | 2416 |
| A 55 | 4.10 | 0.159 | 1425 | A 95 | 7.02 | 0.275 | 2441 |
| A 56 | 4.18 | 0.162 | 1451 | A 96 | 7.09 | 0.278 | 2467 |
| A 57 | 4.25 | 0.165 | 1476 | A 97 | 7.16 | 0.281 | 2492 |
| A 58 | 4.33 | 0.168 | 1501 | A 98 | 7.24 | 0.283 | 2517 |
| A 59 | 4.40 | 0.171 | 1527 | A 100 | 7.38 | 0.289 | 2568 |
| A 60 | 4.47 | 0.174 | 1552 | A 103 | 7.60 | 0.298 | 2644 |
| A 61 | 4.55 | 0.176 | 1578 | A 105 | 7.74 | 0.304 | 2695 |
| A 62 | 4.62 | 0.179 | 1603 | A 110 | 8.10 | 0.318 | 2822 |
| A 63 | 4.69 | 0.182 | 1628 | A 112 | 8.24 | 0.392 | 2873 |
| A 64 | 4.77 | 0.185 | 1654 | A 120 | 8.82 | 0.420 | 3076 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| A 128 | 9.39 | 0.448 | 3279 |
| A 136 | 9.96 | 0.476 | 3483 |
| A 144 | 10.52 | 0.504 | 3686 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| A 158 | 11.51 | 0.553 | 4041 |
| A 173 | 12.56 | 0.605 | 4422 |
| A 180 | 13.04 | 0.630 | 4600 |

Nominal Dimension




B Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|------------|---------------|--------------------|
| B 28(inch) | 2.22 | 0.132 | 746 |
| B 32 | 2.65 | 0.151 | 847 |
| B 34 | 2.87 | 0.160 | 898 |
| B 35 | 2.98 | 0.165 | 924 |
| B 36 | 3.09 | 0.170 | 949 |
| B 37 | 3.19 | 0.175 | 974 |
| B 38 | 3.30 | 0.179 | 1000 |
| B 40 | 3.52 | 0.189 | 1051 |
| B 41 | 3.63 | 0.194 | 1076 |
| B 42 | 3.73 | 0.198 | 1101 |
| B 43 | 3.84 | 0.203 | 1127 |
| B 44 | 3.95 | 0.208 | 1152 |
| B 45 | 4.06 | 0.212 | 1178 |
| B 46 | 4.16 | 0.217 | 1203 |
| B 47 | 4.27 | 0.222 | 1228 |
| B 48 | 4.38 | 0.227 | 1254 |
| B 49 | 4.48 | 0.231 | 1279 |
| B 50 | 4.59 | 0.236 | 1305 |
| B 51 | 4.70 | 0.241 | 1330 |
| B 52 | 4.81 | 0.245 | 1355 |
| B 53 | 4.91 | 0.250 | 1381 |
| B 54 | 5.02 | 0.255 | 1406 |
| B 55 | 5.13 | 0.260 | 1432 |
| B 56 | 5.23 | 0.264 | 1457 |
| B 57 | 5.34 | 0.269 | 1482 |
| B 58 | 5.45 | 0.274 | 1508 |
| B 59 | 5.55 | 0.278 | 1533 |
| B 60 | 5.66 | 0.283 | 1559 |
| B 61 | 5.77 | 0.288 | 1584 |
| B 62 | 5.87 | 0.293 | 1609 |
| B 63 | 5.98 | 0.297 | 1635 |
| B 64 | 6.08 | 0.302 | 1660 |
| B 65 | 6.19 | 0.307 | 1686 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| B 66 | 6.30 | 0.312 | 1711 |
| B 67 | 6.40 | 0.316 | 1736 |
| B 68 | 6.51 | 0.321 | 1762 |
| B 69 | 6.61 | 0.326 | 1787 |
| B 70 | 6.72 | 0.330 | 1813 |
| B 71 | 6.83 | 0.335 | 1838 |
| B 72 | 6.93 | 0.340 | 1863 |
| B 73 | 7.04 | 0.345 | 1889 |
| B 74 | 7.14 | 0.349 | 1914 |
| B 75 | 7.25 | 0.354 | 1940 |
| B 76 | 7.35 | 0.359 | 1965 |
| B 77 | 7.46 | 0.363 | 1990 |
| B 78 | 7.56 | 0.368 | 2016 |
| B 79 | 7.67 | 0.373 | 2041 |
| B 80 | 7.77 | 0.378 | 2067 |
| B 81 | 7.88 | 0.382 | 2092 |
| B 82 | 7.99 | 0.387 | 2117 |
| B 83 | 8.09 | 0.392 | 2143 |
| B 84 | 8.19 | 0.396 | 2168 |
| B 85 | 8.30 | 0.401 | 2194 |
| B 86 | 8.40 | 0.406 | 2219 |
| B 87 | 8.51 | 0.411 | 2244 |
| B 88 | 8.61 | 0.415 | 2270 |
| B 89 | 8.72 | 0.420 | 2295 |
| B 90 | 8.82 | 0.425 | 2321 |
| B 91 | 8.93 | 0.430 | 2346 |
| B 92 | 9.03 | 0.434 | 2371 |
| B 93 | 9.14 | 0.439 | 2397 |
| B 94 | 9.24 | 0.444 | 2422 |
| B 95 | 9.34 | 0.448 | 2448 |
| B 96 | 9.45 | 0.453 | 2473 |
| B 97 | 9.55 | 0.458 | 2498 |
| B 98 | 9.66 | 0.463 | 2524 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| B 99 | 9.76 | 0.467 | 2549 | B 154 | 15.38 | 0.763 | 3946 |
| B 100 | 9.86 | 0.472 | 2575 | B 158 | 15.78 | 0.783 | 4048 |
| B 103 | 10.18 | 0.486 | 2651 | B 162 | 16.18 | 0.803 | 4149 |
| B 105 | 10.38 | 0.496 | 2702 | B 173 | 17.28 | 0.858 | 4429 |
| B 108 | 10.69 | 0.510 | 2778 | B 180 | 17.97 | 0.892 | 4607 |
| B 112 | 11.11 | 0.555 | 2879 | B 195 | 19.44 | 0.967 | 4988 |
| B 120 | 11.93 | 0.595 | 3083 | B 205 | 20.42 | 1.016 | 5242 |
| B 124 | 12.34 | 0.615 | 3184 | B 210 | 20.90 | 1.041 | 5369 |
| B 128 | 12.75 | 0.634 | 3286 | B 225 | 22.35 | 1.115 | 5750 |
| B 133 | 13.26 | 0.659 | 3413 | B 240 | 23.78 | 1.190 | 6131 |
| B 136 | 13.56 | 0.674 | 3489 | B 255 | 25.20 | 1.264 | 6512 |
| B 140 | 13.97 | 0.694 | 3591 | B 270 | 26.60 | 1.338 | 6893 |
| B 144 | 14.37 | 0.714 | 3692 | B 285 | 27.98 | 1.413 | 7274 |
| B 148 | 14.78 | 0.734 | 3794 | B 300 | 29.36 | 1.487 | 7655 |
| B 150 | 14.98 | 0.744 | 3845 | B 315 | 30.72 | 1.561 | 8036 |


Nominal Dimension



C Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| C 51(inch) | 5.31 | 0.415 | 1339 | C 150 | 23.77 | 1.286 | 3854 |
| C 55 | 6.03 | 0.448 | 1441 | C 158 | 25.31 | 1.355 | 4057 |
| C 60 | 6.93 | 0.489 | 1568 | C 162 | 26.09 | 1.389 | 4159 |
| C 68 | 8.38 | 0.554 | 1771 | C 173 | 28.24 | 1.483 | 4438 |
| C 72 | 9.11 | 0.586 | 1873 | C 180 | 29.62 | 1.544 | 4616 |
| C 75 | 9.66 | 0.611 | 1949 | C 195 | 32.59 | 1.672 | 4997 |
| C 78 | 10.21 | 0.635 | 2025 | C 210 | 35.59 | 1.801 | 5378 |
| C 81 | 10.76 | 0.660 | 2101 | C 225 | 38.62 | 1.929 | 5759 |
| C 85 | 11.50 | 0.692 | 2203 | C 240 | 41.68 | 2.058 | 6140 |
| C 90 | 12.42 | 0.733 | 2330 | C 255 | 44.77 | 2.187 | 6521 |
| C 100 | 14.28 | 0.814 | 2584 | C 270 | 47.89 | 2.315 | 6902 |
| C 105 | 15.21 | 0.855 | 2711 | C 285 | 51.04 | 2.444 | 7283 |
| C 109 | 15.96 | 0.888 | 2813 | C 300 | 54.22 | 2.573 | 7664 |
| C 112 | 16.53 | 0.960 | 2889 | C 315 | 57.43 | 2.701 | 8045 |
| C 120 | 18.03 | 1.029 | 3092 | C 330 | 60.67 | 2.830 | 8426 |
| C 124 | 18.79 | 1.063 | 3194 | C 345 | 63.94 | 2.958 | 8807 |
| C 128 | 19.55 | 1.098 | 3295 | C 360 | 67.23 | 3.087 | 9188 |
| C 136 | 21.08 | 1.166 | 3498 | C 390 | 73.92 | 3.344 | 9950 |
| C 144 | 22.61 | 1.235 | 3702 | C 420 | 80.73 | 3.602 | 10712 |

Nominal Dimension




D Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|
| D 120(inch) | 33.12 | 1.998 | 3108 |
| D 128 | 35.83 | 2.131 | 3311 |
| D 144 | 41.18 | 2.397 | 3717 |
| D 158 | 45.79 | 2.630 | 4073 |
| D 162 | 47.09 | 2.697 | 4174 |
| D 173 | 50.66 | 2.880 | 4454 |
| D 180 | 52.91 | 2.996 | 4632 |
| D 195 | 57.67 | 3.246 | 5013 |
| D 210 | 62.35 | 3.496 | 5394 |
| D 225 | 66.97 | 3.745 | 5775 |
| D 240 | 71.50 | 3.995 | 6156 |
| D 255 | 75.97 | 4.245 | 6537 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| D 270 | 80.36 | 4.494 | 6918 |
| D 285 | 84.67 | 4.744 | 7299 |
| D 300 | 88.92 | 4.994 | 7680 |
| D 315 | 93.08 | 5.243 | 8061 |
| D 330 | 97.18 | 5.493 | 8442 |
| D 345 | 101.20 | 5.743 | 8823 |
| D 360 | 105.14 | 5.993 | 9204 |
| D 390 | 112.81 | 6.492 | 9966 |
| D 420 | 120.18 | 6.991 | 10728 |
| D 450 | 127.25 | 7.491 | 11490 |
| D 480 | 134.03 | 7.990 | 12252 |
| D 540 | 146.70 | 8.988 | 13776 |

Nominal Dimension



E Section


| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|
| E 180(inch) | 72.20 | 4.559 | 4647 |
| E 195 | 78.63 | 4.939 | 5028 |
| E 210 | 84.97 | 5.318 | 5409 |
| E 240 | 97.40 | 6.078 | 6171 |
| E 270 | 109.49 | 6.838 | 6933 |
| E 300 | 121.23 | 7.598 | 7695 |
| E 330 | 132.63 | 8.358 | 8457 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| E 360 | 143.69 | 9.117 | 9219 |
| E 390 | 154.41 | 9.879 | 9981 |
| E 420 | 164.79 | 10.637 | 10743 |
| E 480 | 184.52 | 12.156 | 12267 |
| E 540 | 202.88 | 13.676 | 13791 |
| E 600 | 219.87 | 15.196 | 15315 |

Industrial Belt - Classical V-Belt

Raw Edge Cogged Belt

V-belt with cog-shaped grooves on the bottom to enhance flexibility while top and bottom parts are covered with rubber or fabric is exposed on sides.




Features

- Excellent durability and flexibility in driving.
- Specially designed cords enhance durability and length stability.
- Excellent in resistance against heat, oil and wear.
- High power transmission efficiency.
- Can be used on small pulleys.
- Show stable performance on high speed rotation.

| Construction | Functions | Materials |
|----------------------|--|---|
| ① Top fabric | Protects internal tension member | Cotton fabric, Polyester, Cotton synthetic fabric |
| ② Tension member | Primary material for transferring power | Polyester, Aramid |
| ③ Compression rubber | Maintains sectional shape by side pressure | CR |
| ④ Bottom rubber | Absorbs shock and prevent cracking in compression rubber | CR |

NR: Natural Rubber / CR: Chloroprene Rubber

Nominal Dimension




AX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|--------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| AX 21 (inch) | 2.27 | 0.065 | 592 | AX 40 | 3.33 | 0.124 | 1074 |
| AX 22 | 2.33 | 0.068 | 617 | AX 41 | 3.38 | 0.127 | 1100 |
| AX 23 | 2.38 | 0.071 | 643 | AX 42 | 3.44 | 0.130 | 1125 |
| AX 24 | 2.44 | 0.074 | 668 | AX 43 | 3.49 | 0.133 | 1151 |
| AX 26 | 2.55 | 0.081 | 719 | AX 44 | 3.54 | 0.136 | 1176 |
| AX 27 | 2.61 | 0.084 | 744 | AX 45 | 3.60 | 0.139 | 1201 |
| AX 28 | 2.66 | 0.087 | 770 | AX 46 | 3.65 | 0.143 | 1227 |
| AX 29 | 2.72 | 0.090 | 795 | AX 47 | 3.71 | 0.146 | 1252 |
| AX 31 | 2.83 | 0.096 | 846 | AX 48 | 3.76 | 0.149 | 1278 |
| AX 32 | 2.88 | 0.099 | 871 | AX 49 | 3.82 | 0.152 | 1303 |
| AX 33 | 2.94 | 0.102 | 897 | AX 50 | 3.87 | 0.155 | 1328 |
| AX 34 | 3.00 | 0.105 | 922 | AX 51 | 3.93 | 0.158 | 1354 |
| AX 35 | 3.05 | 0.108 | 947 | AX 52 | 3.98 | 0.161 | 1379 |
| AX 36 | 3.11 | 0.112 | 973 | AX 53 | 4.03 | 0.164 | 1405 |
| AX 37 | 3.16 | 0.115 | 998 | AX 54 | 4.09 | 0.167 | 1430 |
| AX 38 | 3.22 | 0.118 | 1024 | AX 55 | 4.14 | 0.170 | 1455 |
| AX 39 | 3.27 | 0.121 | 1049 | AX 56 | 4.19 | 0.174 | 1481 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| AX 57 | 4.25 | 0.177 | 1506 | AX 81 | 5.51 | 0.251 | 2116 |
| AX 58 | 4.30 | 0.180 | 1532 | AX 82 | 5.57 | 0.254 | 2141 |
| AX 59 | 4.36 | 0.183 | 1557 | AX 85 | 5.72 | 0.263 | 2217 |
| AX 60 | 4.41 | 0.186 | 1582 | AX 86 | 5.77 | 0.267 | 2243 |
| AX 61 | 4.46 | 0.189 | 1608 | AX 87 | 5.82 | 0.270 | 2268 |
| AX 62 | 4.52 | 0.192 | 1633 | AX 88 | 5.88 | 0.273 | 2294 |
| AX 63 | 4.57 | 0.195 | 1659 | AX 90 | 5.98 | 0.279 | 2344 |
| AX 64 | 4.62 | 0.198 | 1684 | AX 91 | 6.03 | 0.282 | 2370 |
| AX 65 | 4.68 | 0.201 | 1709 | AX 92 | 6.08 | 0.285 | 2395 |
| AX 66 | 4.73 | 0.205 | 1735 | AX 93 | 6.13 | 0.288 | 2421 |
| AX 67 | 4.78 | 0.208 | 1760 | AX 94 | 6.18 | 0.291 | 2446 |
| AX 68 | 4.83 | 0.211 | 1786 | AX 96 | 6.28 | 0.298 | 2497 |
| AX 69 | 4.89 | 0.214 | 1811 | AX 97 | 6.33 | 0.301 | 2522 |
| AX 70 | 4.94 | 0.217 | 1836 | AX 98 | 6.38 | 0.304 | 2548 |
| AX 71 | 4.99 | 0.220 | 1862 | AX 103 | 6.64 | 0.325 | 2675 |
| AX 72 | 5.04 | 0.223 | 1887 | AX 105 | 6.74 | 0.325 | 2725 |
| AX 73 | 5.10 | 0.226 | 1913 | AX 110 | 6.99 | 0.341 | 2852 |
| AX 74 | 5.15 | 0.229 | 1938 | AX 112 | 7.09 | 0.347 | 2903 |
| AX 75 | 5.20 | 0.232 | 1963 | AX 120 | 7.48 | 0.372 | 3106 |
| AX 76 | 5.25 | 0.236 | 1989 | AX 128 | 7.87 | 0.399 | 3310 |
| AX 77 | 5.31 | 0.239 | 2014 | AX 144 | 8.63 | 0.446 | 3716 |
| AX 78 | 5.36 | 0.242 | 2040 | AX 173 | 9.97 | 0.536 | 4453 |
| AX 79 | 5.41 | 0.245 | 2065 | AX 200 | 11.16 | 0.620 | 5138 |
| AX 80 | 5.46 | 0.248 | 2090 | | | | |

Nominal Dimension




BX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| BX 23(inch) | 3.83 | 0.116 | 655 | BX 44 | 5.89 | 0.222 | 1189 |
| BX 28 | 4.32 | 0.141 | 782 | BX 46 | 6.09 | 0.232 | 1240 |
| BX 32 | 4.72 | 0.161 | 884 | BX 48 | 6.28 | 0.242 | 1290 |
| BX 34 | 4.92 | 0.171 | 935 | BX 50 | 6.47 | 0.252 | 1341 |
| BX 35 | 5.01 | 0.176 | 960 | BX 51 | 6.57 | 0.257 | 1367 |
| BX 36 | 5.11 | 0.181 | 986 | BX 52 | 6.66 | 0.262 | 1392 |
| BX 37 | 5.21 | 0.187 | 1011 | BX 53 | 6.76 | 0.267 | 1417 |
| BX 38 | 5.31 | 0.192 | 1036 | BX 54 | 6.85 | 0.272 | 1443 |
| BX 40 | 5.50 | 0.202 | 1087 | BX 55 | 6.95 | 0.277 | 1468 |
| BX 41 | 5.60 | 0.207 | 1113 | BX 56 | 7.04 | 0.282 | 1494 |
| BX 42 | 5.70 | 0.212 | 1138 | BX 57 | 7.14 | 0.287 | 1519 |
| BX 43 | 5.80 | 0.217 | 1163 | BX 58 | 7.23 | 0.292 | 1544 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| BX 59 | 7.33 | 0.297 | 1570 |
| BX 60 | 7.42 | 0.302 | 1595 |
| BX 61 | 7.51 | 0.308 | 1621 |
| BX 62 | 7.61 | 0.313 | 1646 |
| BX 63 | 7.70 | 0.318 | 1671 |
| BX 64 | 7.80 | 0.323 | 1697 |
| BX 65 | 7.89 | 0.328 | 1722 |
| BX 66 | 7.98 | 0.333 | 1748 |
| BX 67 | 8.08 | 0.338 | 1773 |
| BX 68 | 8.17 | 0.343 | 1798 |
| BX 70 | 8.36 | 0.353 | 1849 |
| BX 71 | 8.45 | 0.358 | 1875 |
| BX 72 | 8.54 | 0.363 | 1900 |
| BX 73 | 8.63 | 0.368 | 1925 |
| BX 74 | 8.73 | 0.373 | 1951 |
| BX 75 | 8.82 | 0.378 | 1976 |
| BX 77 | 9.00 | 0.388 | 2027 |
| BX 78 | 9.09 | 0.393 | 2052 |
| BX 79 | 9.18 | 0.398 | 2078 |
| BX 80 | 9.28 | 0.403 | 2103 |
| BX 81 | 9.37 | 0.408 | 2129 |
| BX 82 | 9.46 | 0.413 | 2154 |
| BX 83 | 9.55 | 0.418 | 2179 |
| BX 84 | 9.64 | 0.423 | 2205 |
| BX 85 | 9.73 | 0.428 | 2230 |
| BX 86 | 9.82 | 0.434 | 2256 |
| BX 87 | 9.91 | 0.439 | 2281 |
| BX 90 | 10.18 | 0.454 | 2357 |
| BX 92 | 10.36 | 0.464 | 2408 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| BX 93 | 10.45 | 0.469 | 2433 |
| BX 95 | 10.63 | 0.479 | 2484 |
| BX 96 | 10.71 | 0.484 | 2510 |
| BX 97 | 10.80 | 0.489 | 2535 |
| BX 99 | 10.98 | 0.499 | 2586 |
| BX 100 | 11.07 | 0.504 | 2611 |
| BX 103 | 11.33 | 0.519 | 2687 |
| BX 105 | 11.51 | 0.529 | 2738 |
| BX 106 | 11.59 | 0.534 | 2764 |
| BX 108 | 11.77 | 0.544 | 2814 |
| BX 112 | 12.11 | 0.564 | 2916 |
| BX 113 | 12.20 | 0.570 | 2941 |
| BX 115 | 12.37 | 0.580 | 2992 |
| BX 116 | 12.46 | 0.584 | 3018 |
| BX 120 | 12.80 | 0.605 | 3119 |
| BX 124 | 13.14 | 0.624 | 3221 |
| BX 126 | 13.30 | 0.634 | 3272 |
| BX 128 | 13.47 | 0.644 | 3322 |
| BX 133 | 13.89 | 0.670 | 3449 |
| BX 136 | 14.14 | 0.685 | 3526 |
| BX 144 | 14.79 | 0.725 | 3729 |
| BX 150 | 15.27 | 0.756 | 3881 |
| BX 158 | 15.91 | 0.794 | 4084 |
| BX 162 | 16.23 | 0.814 | 4186 |
| BX 173 | 17.08 | 0.871 | 4465 |
| BX 180 | 17.61 | 0.906 | 4643 |
| BX 195 | 18.73 | 0.982 | 5024 |
| BX 200 | 19.09 | 1.006 | 5151 |

Nominal Dimension




CX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|
| CX 40(inch) | 8.37 | 0.333 | 1125 |
| CX 51 | 10.16 | 0.425 | 1405 |
| CX 60 | 11.59 | 0.500 | 1633 |
| CX 68 | 12.82 | 0.567 | 1836 |
| CX 75 | 13.87 | 0.625 | 2014 |
| CX 81 | 14.76 | 0.675 | 2167 |
| CX 85 | 15.34 | 0.708 | 2268 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| CX 90 | 16.05 | 0.750 | 2395 |
| CX 96 | 16.90 | 0.800 | 2548 |
| CX 100 | 17.45 | 0.833 | 2649 |
| CX 112 | 19.06 | 0.933 | 2954 |
| CX 120 | 20.10 | 0.999 | 3157 |
| CX 195 | 28.37 | 1.625 | 5062 |
| CX 200 | 28.83 | 1.667 | 5189 |

Industrial Belt - Narrow V-Belt

Wrapped Belt




Features

- Designed to enhance power transmission efficiency by giving even stress over tension member with a special sectional shape of narrower top width and taller height, special raw materials and production technique.

| Construction | Functions | Materials |
|-----------------------------|---|---|
| ❶ Cover fabric | Protects the inner parts of the belt and strong abrasion on the pulley groove | Cotton fabric, Polyester, Cotton synthetic fabric |
| ❷ Tension member | Primary material for transferring power | Polyester, Aramid |
| ❸ Top compression rubber | Maintains belt shape (upper) | NR, CR |
| ❹ Adhesive rubber | Supports and protects Tension member adhesion | NR, CR |
| ❺ Bottom compression rubber | Maintains belt shape (lower) | NR, CR |

NR : Natural Rubber / CR : Chloroprene Rubber


Nominal Dimension



3V Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| 3V 250(10in.) | 3.47 | 0.050 | 642 | 3V 630 | 4.80 | 0.125 | 1607 |
| 3V 265 | 3.51 | 0.053 | 680 | 3V 670 | 5.00 | 0.133 | 1709 |
| 3V 280 | 3.55 | 0.056 | 718 | 3V 710 | 5.20 | 0.141 | 1810 |
| 3V 300 | 3.60 | 0.059 | 769 | 3V 750 | 5.42 | 0.149 | 1912 |
| 3V 315 | 3.64 | 0.062 | 807 | 3V 800 | 5.70 | 0.159 | 2039 |
| 3V 335 | 3.69 | 0.066 | 858 | 3V 850 | 6.00 | 0.169 | 2166 |
| 3V 355 | 3.75 | 0.070 | 908 | 3V 900 | 6.31 | 0.178 | 2293 |
| 3V 375 | 3.81 | 0.074 | 959 | 3V 950 | 6.64 | 0.188 | 2420 |
| 3V 400 | 3.89 | 0.079 | 1023 | 3V 1000 | 6.99 | 0.198 | 2547 |
| 3V 425 | 3.97 | 0.084 | 1086 | 3V 1060 | 7.42 | 0.210 | 2699 |
| 3V 450 | 4.06 | 0.089 | 1150 | 3V 1120 | 7.88 | 0.222 | 2852 |
| 3V 475 | 4.15 | 0.094 | 1213 | 3V 1180 | 8.37 | 0.234 | 3004 |
| 3V 500 | 4.25 | 0.099 | 1277 | 3V 1250 | 8.96 | 0.248 | 3182 |
| 3V 530 | 4.36 | 0.105 | 1353 | 3V 1320 | 9.58 | 0.262 | 3360 |
| 3V 560 | 4.49 | 0.111 | 1429 | 3V 1400 | 10.33 | 0.278 | 3563 |
| 3V 600 | 4.67 | 0.119 | 1531 | | | | |


Nominal Dimension



5V Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| 5V 500(10in.) | 7.25 | 0.272 | 1274 | 5V 1500 | 27.34 | 0.816 | 3814 |
| 5V 560 | 8.23 | 0.305 | 1427 | 5V 1600 | 29.79 | 0.871 | 4068 |
| 5V 630 | 9.41 | 0.343 | 1605 | 5V 1700 | 32.32 | 0.925 | 4322 |
| 5V 670 | 10.10 | 0.365 | 1706 | 5V 1800 | 34.93 | 0.980 | 4576 |
| 5V 710 | 10.80 | 0.386 | 1808 | 5V 1900 | 37.62 | 1.034 | 4830 |
| 5V 750 | 11.52 | 0.408 | 1909 | 5V 2000 | 40.39 | 1.088 | 5084 |
| 5V 800 | 12.43 | 0.435 | 2036 | 5V 2120 | 43.81 | 1.154 | 5389 |
| 5V 850 | 13.37 | 0.463 | 2163 | 5V 2240 | 47.36 | 1.219 | 5694 |
| 5V 900 | 14.32 | 0.490 | 2290 | 5V 2360 | 51.02 | 1.284 | 5999 |
| 5V 950 | 15.30 | 0.517 | 2417 | 5V 2500 | 55.43 | 1.361 | 6354 |
| 5V 1000 | 16.29 | 0.544 | 2544 | 5V 2650 | 60.34 | 1.442 | 6735 |
| 5V 1060 | 17.51 | 0.577 | 2697 | 5V 2800 | 65.42 | 1.524 | 7116 |
| 5V 1120 | 18.76 | 0.610 | 2849 | 5V 3000 | 72.48 | 1.633 | 7624 |
| 5V 1180 | 20.04 | 0.642 | 3002 | 5V 3150 | 77.98 | 1.714 | 8005 |
| 5V 1250 | 21.57 | 0.680 | 3179 | 5V 3350 | 85.60 | 1.823 | 8513 |
| 5V 1320 | 23.13 | 0.718 | 3357 | 5V 3550 | 93.54 | 1.932 | 9021 |
| 5V 1400 | 24.97 | 0.762 | 3560 | | | | |

Nominal Dimension




8V Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| 8V 1000(10in.) | 33.40 | 1.435 | 2540 | 8V 1900 | 69.50 | 2.727 | 4826 |
| 8V 1060 | 35.89 | 1.521 | 2692 | 8V 2000 | 73.35 | 2.870 | 5080 |
| 8V 1120 | 38.37 | 1.607 | 2845 | 8V 2120 | 77.93 | 3.042 | 5385 |
| 8V 1180 | 40.83 | 1.693 | 2997 | 8V 2240 | 82.46 | 3.214 | 5690 |
| 8V 1250 | 43.69 | 1.794 | 3175 | 8V 2360 | 86.94 | 3.387 | 5994 |
| 8V 1320 | 46.53 | 1.894 | 3353 | 8V 2500 | 92.12 | 3.588 | 6350 |
| 8V 1400 | 49.77 | 2.009 | 3556 | 8V 2650 | 97.60 | 3.803 | 6731 |
| 8V 1500 | 53.78 | 2.153 | 3810 | 8V 2800 | 103.00 | 4.018 | 7112 |
| 8V 1600 | 57.75 | 2.296 | 4064 | 8V 3000 | 110.09 | 4.305 | 7620 |
| 8V 1700 | 61.70 | 2.440 | 4318 | 8V 3150 | 115.33 | 4.520 | 8001 |
| 8V 1800 | 65.62 | 2.583 | 4572 | 8V 3350 | 122.20 | 4.807 | 8509 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| 8V 3550 | 128.94 | 5.094 | 9017 |
| 8V 3750 | 135.55 | 5.381 | 9525 |
| 8V 4000 | 143.64 | 5.740 | 10160 |
| 8V 4250 | 151.52 | 6.099 | 10795 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| 8V 4500 | 159.21 | 6.458 | 11430 |
| 8V 4750 | 166.69 | 6.816 | 12065 |
| 8V 5000 | 173.98 | 7.175 | 12700 |
| 8V 5200 | 179.66 | 7.462 | 13208 |

Nominal Dimension



SPZ Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|
| SPZ 487(mm) | 2.90 | 0.038 | 500 |
| SPZ 512 | 2.96 | 0.040 | 525 |
| SPZ 562 | 3.10 | 0.044 | 575 |
| SPZ 587 | 3.17 | 0.046 | 600 |
| SPZ 612 | 3.24 | 0.048 | 625 |
| SPZ 630 | 3.28 | 0.049 | 643 |
| SPZ 637 | 3.30 | 0.050 | 650 |
| SPZ 662 | 3.37 | 0.052 | 675 |
| SPZ 670 | 3.39 | 0.053 | 683 |
| SPZ 687 | 3.44 | 0.054 | 700 |
| SPZ 710 | 3.50 | 0.055 | 723 |
| SPZ 722 | 3.53 | 0.056 | 735 |
| SPZ 737 | 3.58 | 0.058 | 750 |
| SPZ 750 | 3.61 | 0.059 | 763 |
| SPZ 762 | 3.64 | 0.059 | 775 |
| SPZ 772 | 3.67 | 0.060 | 785 |
| SPZ 787 | 3.71 | 0.061 | 800 |
| SPZ 800 | 3.75 | 0.062 | 813 |
| SPZ 812 | 3.78 | 0.063 | 825 |
| SPZ 825 | 3.81 | 0.064 | 838 |
| SPZ 837 | 3.85 | 0.065 | 850 |
| SPZ 850 | 3.88 | 0.066 | 863 |
| SPZ 862 | 3.92 | 0.067 | 875 |
| SPZ 875 | 3.95 | 0.068 | 888 |
| SPZ 887 | 3.98 | 0.069 | 900 |
| SPZ 900 | 4.02 | 0.070 | 913 |
| SPZ 912 | 4.05 | 0.071 | 925 |
| SPZ 925 | 4.09 | 0.072 | 938 |
| SPZ 937 | 4.12 | 0.073 | 950 |
| SPZ 950 | 4.15 | 0.074 | 963 |
| SPZ 962 | 4.19 | 0.075 | 975 |
| SPZ 987 | 4.26 | 0.077 | 1000 |
| SPZ 1000 | 4.29 | 0.078 | 1013 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| SPZ 1012 | 4.32 | 0.079 | 1025 |
| SPZ 1024 | 4.36 | 0.080 | 1037 |
| SPZ 1037 | 4.39 | 0.081 | 1050 |
| SPZ 1047 | 4.42 | 0.082 | 1060 |
| SPZ 1060 | 4.45 | 0.083 | 1073 |
| SPZ 1077 | 4.50 | 0.084 | 1090 |
| SPZ 1087 | 4.53 | 0.085 | 1100 |
| SPZ 1112 | 4.60 | 0.087 | 1125 |
| SPZ 1120 | 4.62 | 0.087 | 1133 |
| SPZ 1137 | 4.66 | 0.089 | 1150 |
| SPZ 1162 | 4.73 | 0.091 | 1175 |
| SPZ 1180 | 4.78 | 0.092 | 1193 |
| SPZ 1187 | 4.80 | 0.093 | 1200 |
| SPZ 1202 | 4.84 | 0.094 | 1215 |
| SPZ 1212 | 4.87 | 0.095 | 1225 |
| SPZ 1237 | 4.94 | 0.097 | 1250 |
| SPZ 1250 | 4.97 | 0.098 | 1263 |
| SPZ 1262 | 5.00 | 0.099 | 1275 |
| SPZ 1287 | 5.07 | 0.100 | 1300 |
| SPZ 1312 | 5.14 | 0.102 | 1325 |
| SPZ 1320 | 5.16 | 0.103 | 1333 |
| SPZ 1337 | 5.21 | 0.104 | 1350 |
| SPZ 1347 | 5.23 | 0.105 | 1360 |
| SPZ 1362 | 5.28 | 0.106 | 1375 |
| SPZ 1387 | 5.34 | 0.108 | 1400 |
| SPZ 1400 | 5.38 | 0.109 | 1413 |
| SPZ 1412 | 5.41 | 0.110 | 1425 |
| SPZ 1437 | 5.48 | 0.112 | 1450 |
| SPZ 1462 | 5.55 | 0.114 | 1475 |
| SPZ 1487 | 5.62 | 0.116 | 1500 |
| SPZ 1500 | 5.65 | 0.117 | 1513 |
| SPZ 1512 | 5.68 | 0.118 | 1525 |
| SPZ 1537 | 5.75 | 0.120 | 1550 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| SPZ 1562 | 5.82 | 0.122 | 1575 | SPZ 2000 | 7.01 | 0.156 | 2013 |
| SPZ 1587 | 5.89 | 0.124 | 1600 | SPZ 2037 | 7.11 | 0.159 | 2050 |
| SPZ 1600 | 5.92 | 0.125 | 1613 | SPZ 2120 | 7.34 | 0.166 | 2133 |
| SPZ 1612 | 5.96 | 0.126 | 1625 | SPZ 2137 | 7.38 | 0.167 | 2150 |
| SPZ 1637 | 6.02 | 0.128 | 1650 | SPZ 2187 | 7.52 | 0.171 | 2200 |
| SPZ 1662 | 6.09 | 0.130 | 1675 | SPZ 2240 | 7.66 | 0.175 | 2253 |
| SPZ 1687 | 6.16 | 0.132 | 1700 | SPZ 2287 | 7.79 | 0.179 | 2300 |
| SPZ 1700 | 6.20 | 0.133 | 1713 | SPZ 2360 | 7.99 | 0.184 | 2373 |
| SPZ 1737 | 6.30 | 0.136 | 1750 | SPZ 2450 | 8.24 | 0.192 | 2463 |
| SPZ 1762 | 6.36 | 0.138 | 1775 | SPZ 2500 | 8.37 | 0.195 | 2513 |
| SPZ 1787 | 6.43 | 0.140 | 1800 | SPZ 2540 | 8.48 | 0.198 | 2553 |
| SPZ 1800 | 6.47 | 0.141 | 1813 | SPZ 2650 | 8.78 | 0.207 | 2663 |
| SPZ 1812 | 6.50 | 0.142 | 1825 | SPZ 2690 | 8.89 | 0.210 | 2703 |
| SPZ 1837 | 6.57 | 0.143 | 1850 | SPZ 2800 | 9.19 | 0.219 | 2813 |
| SPZ 1862 | 6.64 | 0.145 | 1875 | SPZ 2840 | 9.30 | 0.222 | 2853 |
| SPZ 1887 | 6.70 | 0.147 | 1900 | SPZ 3000 | 9.73 | 0.234 | 3013 |
| SPZ 1900 | 6.74 | 0.148 | 1913 | SPZ 3150 | 10.14 | 0.246 | 3163 |
| SPZ 1937 | 6.84 | 0.151 | 1950 | SPZ 3350 | 10.68 | 0.262 | 3363 |
| SPZ 1987 | 6.98 | 0.155 | 2000 | SPZ 3550 | 11.23 | 0.277 | 3563 |

Nominal Dimension




SPA Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| SPA 732(mm) | 4.59 | 0.091 | 750 | SPA 1032 | 5.39 | 0.129 | 1050 |
| SPA 757 | 4.65 | 0.095 | 775 | SPA 1060 | 5.47 | 0.132 | 1078 |
| SPA 782 | 4.72 | 0.098 | 800 | SPA 1082 | 5.53 | 0.135 | 1100 |
| SPA 800 | 4.76 | 0.100 | 818 | SPA 1107 | 5.61 | 0.138 | 1125 |
| SPA 807 | 4.78 | 0.101 | 825 | SPA 1120 | 5.64 | 0.140 | 1138 |
| SPA 832 | 4.85 | 0.104 | 850 | SPA 1132 | 5.68 | 0.141 | 1150 |
| SPA 850 | 4.90 | 0.106 | 868 | SPA 1157 | 5.75 | 0.145 | 1175 |
| SPA 857 | 4.92 | 0.107 | 875 | SPA 1180 | 5.82 | 0.147 | 1198 |
| SPA 882 | 4.98 | 0.110 | 900 | SPA 1207 | 5.90 | 0.151 | 1225 |
| SPA 900 | 5.03 | 0.112 | 918 | SPA 1232 | 5.97 | 0.154 | 1250 |
| SPA 907 | 5.05 | 0.113 | 925 | SPA 1250 | 6.02 | 0.156 | 1268 |
| SPA 932 | 5.12 | 0.116 | 950 | SPA 1257 | 6.04 | 0.157 | 1275 |
| SPA 950 | 5.17 | 0.119 | 968 | SPA 1272 | 6.09 | 0.159 | 1290 |
| SPA 957 | 5.19 | 0.120 | 975 | SPA 1282 | 6.12 | 0.160 | 1300 |
| SPA 982 | 5.25 | 0.123 | 1000 | SPA 1307 | 6.19 | 0.163 | 1325 |
| SPA 1000 | 5.30 | 0.125 | 1018 | SPA 1320 | 6.23 | 0.165 | 1338 |
| SPA 1007 | 5.32 | 0.126 | 1025 | SPA 1332 | 6.27 | 0.166 | 1350 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| SPA 1357 | 6.34 | 0.170 | 1375 | SPA 1800 | 7.76 | 0.225 | 1818 |
| SPA 1382 | 6.42 | 0.173 | 1400 | SPA 1807 | 7.78 | 0.226 | 1825 |
| SPA 1400 | 6.47 | 0.175 | 1418 | SPA 1832 | 7.86 | 0.229 | 1850 |
| SPA 1407 | 6.49 | 0.176 | 1425 | SPA 1857 | 7.95 | 0.232 | 1875 |
| SPA 1432 | 6.57 | 0.179 | 1450 | SPA 1882 | 8.03 | 0.235 | 1900 |
| SPA 1457 | 6.65 | 0.182 | 1475 | SPA 1900 | 8.10 | 0.237 | 1918 |
| SPA 1482 | 6.73 | 0.185 | 1500 | SPA 1907 | 8.12 | 0.238 | 1925 |
| SPA 1500 | 6.78 | 0.187 | 1518 | SPA 1932 | 8.21 | 0.241 | 1950 |
| SPA 1507 | 6.81 | 0.188 | 1525 | SPA 1957 | 8.29 | 0.245 | 1975 |
| SPA 1532 | 6.88 | 0.191 | 1550 | SPA 1982 | 8.38 | 0.248 | 2000 |
| SPA 1557 | 6.96 | 0.195 | 1575 | SPA 2000 | 8.44 | 0.250 | 2018 |
| SPA 1582 | 7.04 | 0.198 | 1600 | SPA 2032 | 8.55 | 0.254 | 2050 |
| SPA 1600 | 7.10 | 0.200 | 1618 | SPA 2057 | 8.64 | 0.257 | 2075 |
| SPA 1607 | 7.12 | 0.201 | 1625 | SPA 2082 | 8.73 | 0.260 | 2100 |
| SPA 1632 | 7.20 | 0.204 | 1650 | SPA 2120 | 8.87 | 0.265 | 2138 |
| SPA 1657 | 7.28 | 0.207 | 1675 | SPA 2132 | 8.91 | 0.266 | 2150 |
| SPA 1682 | 7.37 | 0.210 | 1700 | SPA 2182 | 9.09 | 0.273 | 2200 |
| SPA 1700 | 7.43 | 0.212 | 1718 | SPA 2207 | 9.18 | 0.276 | 2225 |
| SPA 1707 | 7.45 | 0.213 | 1725 | SPA 2232 | 9.27 | 0.279 | 2250 |
| SPA 1732 | 7.53 | 0.216 | 1750 | SPA 2240 | 9.30 | 0.280 | 2258 |
| SPA 1757 | 7.61 | 0.220 | 1775 | SPA 2282 | 9.46 | 0.285 | 2300 |
| SPA 1782 | 7.70 | 0.223 | 1800 | SPA 2300 | 9.52 | 0.287 | 2318 |

Nominal Dimension




SPB Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|--------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| SPB 1250(mm) | 7.59 | 0.268 | 1272 | SPB 2280 | 12.93 | 0.488 | 2302 |
| SPB 1320 | 7.87 | 0.283 | 1342 | SPB 2360 | 13.45 | 0.506 | 2382 |
| SPB 1400 | 8.21 | 0.300 | 1422 | SPB 2400 | 13.72 | 0.514 | 2422 |
| SPB 1500 | 8.65 | 0.321 | 1522 | SPB 2500 | 14.40 | 0.536 | 2522 |
| SPB 1600 | 9.12 | 0.343 | 1622 | SPB 2650 | 15.47 | 0.568 | 2672 |
| SPB 1700 | 9.61 | 0.364 | 1722 | SPB 2680 | 15.69 | 0.574 | 2702 |
| SPB 1800 | 10.12 | 0.386 | 1822 | SPB 2800 | 16.59 | 0.600 | 2822 |
| SPB 1900 | 10.66 | 0.407 | 1922 | SPB 2840 | 16.90 | 0.608 | 2862 |
| SPB 2000 | 11.22 | 0.429 | 2022 | SPB 3000 | 18.17 | 0.643 | 3022 |
| SPB 2020 | 11.34 | 0.433 | 2042 | SPB 3150 | 19.42 | 0.675 | 3172 |
| SPB 2120 | 11.93 | 0.454 | 2142 | SPB 3250 | 20.29 | 0.696 | 3272 |
| SPB 2150 | 12.11 | 0.461 | 2172 | SPB 3350 | 21.17 | 0.718 | 3372 |
| SPB 2240 | 12.67 | 0.480 | 2262 | SPB 3750 | 24.96 | 0.803 | 3772 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| SPB 3800 | 25.46 | 0.814 | 3822 |
| SPB 4000 | 27.53 | 0.857 | 4022 |
| SPB 4250 | 30.24 | 0.911 | 4272 |
| SPB 4500 | 33.10 | 0.964 | 4522 |
| SPB 4560 | 33.81 | 0.977 | 4582 |
| SPB 4750 | 36.11 | 1.018 | 4772 |
| SPB 4820 | 36.98 | 1.033 | 4842 |
| SPB 5000 | 39.28 | 1.071 | 5022 |
| SPB 5070 | 40.19 | 1.086 | 5092 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| SPB 5300 | 43.27 | 1.136 | 5322 |
| SPB 5600 | 47.48 | 1.200 | 5622 |
| SPB 6000 | 53.43 | 1.286 | 6022 |
| SPB 6300 | 58.14 | 1.350 | 6322 |
| SPB 6700 | 64.76 | 1.435 | 6722 |
| SPB 7100 | 71.76 | 1.521 | 7122 |
| SPB 7500 | 79.15 | 1.607 | 7522 |
| SPB 8000 | 88.93 | 1.714 | 8022 |

Nominal Dimension



SPC Section


| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|--------------|------------|---------------|--------------------|
| SPC 2000(mm) | 17.20 | 0.794 | 2030 |
| SPC 2120 | 19.15 | 0.842 | 2150 |
| SPC 2240 | 21.10 | 0.889 | 2270 |
| SPC 2360 | 23.04 | 0.937 | 2390 |
| SPC 2500 | 25.30 | 0.992 | 2530 |
| SPC 2650 | 27.72 | 1.052 | 2680 |
| SPC 2800 | 30.12 | 1.112 | 2830 |
| SPC 3000 | 33.32 | 1.191 | 3030 |
| SPC 3150 | 35.71 | 1.250 | 3180 |
| SPC 3350 | 38.89 | 1.330 | 3380 |
| SPC 3550 | 42.05 | 1.409 | 3580 |
| SPC 3750 | 45.20 | 1.489 | 3780 |
| SPC 4000 | 49.12 | 1.588 | 4030 |
| SPC 4250 | 53.03 | 1.687 | 4280 |
| SPC 4500 | 56.91 | 1.786 | 4530 |
| SPC 4750 | 60.77 | 1.886 | 4780 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|
| SPC 5000 | 64.61 | 1.985 | 5030 |
| SPC 5300 | 69.19 | 2.104 | 5330 |
| SPC 5600 | 73.74 | 2.223 | 5630 |
| SPC 6000 | 79.77 | 2.382 | 6030 |
| SPC 6300 | 84.25 | 2.501 | 6330 |
| SPC 6700 | 90.19 | 2.660 | 6730 |
| SPC 7100 | 96.07 | 2.818 | 7130 |
| SPC 7500 | 101.91 | 2.977 | 7530 |
| SPC 8000 | 109.13 | 3.176 | 8030 |
| SPC 8500 | 116.27 | 3.374 | 8530 |
| SPC 9000 | 123.33 | 3.573 | 9030 |
| SPC 9500 | 130.31 | 3.771 | 9530 |
| SPC 10000 | 137.21 | 3.976 | 10030 |
| SPC 10600 | 145.39 | 4.038 | 10630 |
| SPC 11200 | 153.45 | 4.454 | 11230 |
| SPC 12500 | 170.52 | 4.970 | 12530 |

Industrial Belt - Narrow V-Belt

Raw Edge Cogged Belt


V-belt with cog-shaped grooves on the bottom to enhance flexibility while top and bottom parts are covered with fabrics and rubber is exposed on sides.



| Construction | Functions | Materials |
|----------------------|--|---|
| ① Top fabric | Protects internal tension member | Cotton fabric, Polyester, Cotton synthetic fabric |
| ② Tension member | Primary material for transferring power | Polyester, Aramid |
| ③ Compression rubber | Maintains sectional shape by side pressure | CR |
| ④ Bottom rubber | Absorbs shock and prevent cracking in compression rubber | CR |

NR : Natural Rubber / CR : Chloroprene Rubber


Nominal Dimension



3VX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| 3VX 250(10in.) | 1.81 | 0.044 | 642 | 3VX 560 | 2.94 | 0.099 | 1429 |
| 3VX 265 | 1.86 | 0.047 | 680 | 3VX 600 | 3.10 | 0.106 | 1531 |
| 3VX 280 | 1.92 | 0.050 | 718 | 3VX 630 | 3.21 | 0.112 | 1607 |
| 3VX 300 | 1.99 | 0.053 | 769 | 3VX 670 | 3.36 | 0.119 | 1709 |
| 3VX 315 | 2.04 | 0.056 | 807 | 3VX 710 | 3.52 | 0.126 | 1810 |
| 3VX 335 | 2.11 | 0.059 | 858 | 3VX 750 | 3.67 | 0.133 | 1912 |
| 3VX 350 | 2.17 | 0.062 | 896 | 3VX 800 | 3.87 | 0.142 | 2039 |
| 3VX 355 | 2.19 | 0.063 | 909 | 3VX 850 | 4.07 | 0.150 | 2166 |
| 3VX 370 | 2.24 | 0.065 | 947 | 3VX 900 | 4.27 | 0.159 | 2293 |
| 3VX 375 | 2.26 | 0.066 | 960 | 3VX 950 | 4.47 | 0.168 | 2420 |
| 3VX 380 | 2.28 | 0.067 | 972 | 3VX 1000 | 4.67 | 0.177 | 2547 |
| 3VX 400 | 2.35 | 0.071 | 1023 | 3VX 1060 | 4.92 | 0.188 | 2699 |
| 3VX 425 | 2.44 | 0.075 | 1087 | 3VX 1120 | 5.17 | 0.199 | 2852 |
| 3VX 440 | 2.50 | 0.078 | 1125 | 3VX 1180 | 5.42 | 0.210 | 3004 |
| 3VX 450 | 2.53 | 0.080 | 1150 | 3VX 1230 | 5.63 | 0.217 | 3131 |
| 3VX 460 | 2.57 | 0.081 | 1175 | 3VX 1250 | 5.72 | 0.221 | 3182 |
| 3VX 475 | 2.63 | 0.084 | 1214 | 3VX 1320 | 6.02 | 0.233 | 3360 |
| 3VX 490 | 2.68 | 0.087 | 1252 | 3VX 1400 | 6.36 | 0.241 | 3563 |
| 3VX 500 | 2.72 | 0.089 | 1277 | 3VX 1500 | 6.80 | 0.264 | 3817 |
| 3VX 530 | 2.83 | 0.094 | 1353 | 3VX 1900 | 8.64 | 0.336 | 4833 |


Nominal Dimension



5VX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| 5VX 500(10in.) | 6.79 | 0.233 | 1275 | 5VX 850 | 10.39 | 0.397 | 2164 |
| 5VX 510 | 6.89 | 0.237 | 1300 | 5VX 860 | 10.49 | 0.401 | 2189 |
| 5VX 530 | 7.11 | 0.247 | 1351 | 5VX 880 | 10.69 | 0.411 | 2240 |
| 5VX 540 | 7.21 | 0.251 | 1377 | 5VX 900 | 10.89 | 0.420 | 2291 |
| 5VX 550 | 7.32 | 0.256 | 1402 | 5VX 910 | 10.99 | 0.425 | 2316 |
| 5VX 560 | 7.42 | 0.261 | 1427 | 5VX 930 | 11.18 | 0.434 | 2367 |
| 5VX 570 | 7.52 | 0.266 | 1453 | 5VX 950 | 11.38 | 0.443 | 2418 |
| 5VX 580 | 7.63 | 0.271 | 1478 | 5VX 960 | 11.48 | 0.448 | 2443 |
| 5VX 590 | 7.73 | 0.275 | 1504 | 5VX 1000 | 11.87 | 0.467 | 2545 |
| 5VX 600 | 7.84 | 0.280 | 1529 | 5VX 1030 | 12.16 | 0.481 | 2621 |
| 5VX 610 | 7.94 | 0.284 | 1554 | 5VX 1060 | 12.45 | 0.495 | 2697 |
| 5VX 630 | 8.15 | 0.294 | 1605 | 5VX 1080 | 12.65 | 0.504 | 2748 |
| 5VX 650 | 8.36 | 0.303 | 1656 | 5VX 1120 | 13.03 | 0.523 | 2850 |
| 5VX 660 | 8.46 | 0.308 | 1681 | 5VX 1150 | 13.32 | 0.537 | 2926 |
| 5VX 670 | 8.56 | 0.313 | 1707 | 5VX 1180 | 13.60 | 0.551 | 3002 |
| 5VX 680 | 8.66 | 0.317 | 1732 | 5VX 1230 | 14.07 | 0.574 | 3129 |
| 5VX 690 | 8.77 | 0.322 | 1758 | 5VX 1250 | 14.26 | 0.583 | 3180 |
| 5VX 710 | 8.97 | 0.331 | 1808 | 5VX 1320 | 14.91 | 0.616 | 3358 |
| 5VX 730 | 9.18 | 0.341 | 1859 | 5VX 1400 | 15.65 | 0.653 | 3561 |
| 5VX 740 | 9.28 | 0.346 | 1885 | 5VX 1500 | 16.55 | 0.700 | 3815 |
| 5VX 750 | 9.38 | 0.350 | 1910 | 5VX 1600 | 17.44 | 0.747 | 4069 |
| 5VX 780 | 9.68 | 0.364 | 1986 | 5VX 1700 | 18.31 | 0.792 | 4323 |
| 5VX 800 | 9.89 | 0.373 | 2037 | 5VX 1800 | 19.17 | 0.840 | 4577 |
| 5VX 810 | 9.99 | 0.378 | 2062 | 5VX 1900 | 20.01 | 0.885 | 4831 |
| 5VX 830 | 10.19 | 0.387 | 2113 | 5VX 2000 | 20.84 | 0.934 | 5085 |
| 5VX 840 | 10.29 | 0.392 | 2139 | | | | |

Nominal Dimension




SPZX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|--------------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| SPZX 630(mm) | 1.84 | 0.051 | 643 | SPZX 750 | 2.00 | 0.061 | 763 |
| SPZX 662 | 1.88 | 0.054 | 675 | SPZX 800 | 2.07 | 0.065 | 813 |
| SPZX 670 | 1.89 | 0.054 | 683 | SPZX 850 | 2.14 | 0.069 | 863 |
| SPZX 687 | 1.92 | 0.056 | 700 | SPZX 875 | 2.18 | 0.071 | 888 |
| SPZX 710 | 1.95 | 0.058 | 723 | SPZX 900 | 2.21 | 0.073 | 913 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| SPZX 925 | 2.25 | 2.954 | 938 | SPZX 1800 | 3.50 | 0.146 | 1813 |
| SPZX 950 | 2.28 | 0.077 | 963 | SPZX 1900 | 3.64 | 0.154 | 1913 |
| SPZX 1000 | 2.35 | 0.081 | 1013 | SPZX 2000 | 3.79 | 0.162 | 2013 |
| SPZX 1120 | 2.52 | 0.091 | 1133 | SPZX 2120 | 3.97 | 0.172 | 2133 |
| SPZX 1150 | 2.56 | 0.093 | 1163 | SPZX 2240 | 4.15 | 0.182 | 2253 |
| SPZX 1250 | 2.70 | 0.101 | 1263 | SPZX 2360 | 4.33 | 0.191 | 2373 |
| SPZX 1270 | 2.73 | 0.103 | 1283 | SPZX 2400 | 4.39 | 0.195 | 2413 |
| SPZX 1320 | 2.80 | 0.107 | 1333 | SPZX 2410 | 4.41 | 0.196 | 2423 |
| SPZX 1345 | 2.84 | 0.109 | 1358 | SPZX 2500 | 4.54 | 0.203 | 2513 |
| SPZX 1400 | 2.92 | 0.114 | 1413 | SPZX 2540 | 4.60 | 0.206 | 2553 |
| SPZX 1420 | 2.95 | 0.115 | 1433 | SPZX 2650 | 4.77 | 0.215 | 2663 |
| SPZX 1450 | 2.99 | 0.118 | 1463 | SPZX 2690 | 4.83 | 0.218 | 2703 |
| SPZX 1500 | 3.06 | 0.122 | 1513 | SPZX 2800 | 5.00 | 0.227 | 2813 |
| SPZX 1520 | 3.09 | 0.123 | 1533 | SPZX 2840 | 5.06 | 0.230 | 2853 |
| SPZX 1600 | 3.21 | 0.130 | 1613 | SPZX 3000 | 5.31 | 0.243 | 3013 |
| SPZX 1700 | 3.35 | 0.138 | 1713 | | | | |

Nominal Dimension




SPAX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|--------------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| SPAX 732(mm) | 2.95 | 0.060 | 750 | SPAX 1320 | 4.48 | 0.109 | 1338 |
| SPAX 762 | 3.03 | 0.062 | 780 | SPAX 1332 | 4.51 | 0.110 | 1350 |
| SPAX 800 | 3.13 | 0.066 | 818 | SPAX 1357 | 4.58 | 0.112 | 1375 |
| SPAX 850 | 3.26 | 0.070 | 868 | SPAX 1382 | 4.64 | 0.114 | 1400 |
| SPAX 882 | 3.34 | 0.073 | 900 | SPAX 1400 | 4.69 | 0.115 | 1418 |
| SPAX 900 | 3.39 | 0.074 | 918 | SPAX 1432 | 4.77 | 0.118 | 1450 |
| SPAX 907 | 3.41 | 0.074 | 925 | SPAX 1450 | 4.82 | 0.119 | 1468 |
| SPAX 932 | 3.47 | 0.077 | 950 | SPAX 1457 | 4.84 | 0.120 | 1475 |
| SPAX 950 | 3.52 | 0.078 | 968 | SPAX 1482 | 4.90 | 0.122 | 1500 |
| SPAX 957 | 3.54 | 0.078 | 975 | SPAX 1500 | 4.95 | 0.124 | 1518 |
| SPAX 1000 | 3.65 | 0.082 | 1018 | SPAX 1532 | 5.03 | 0.126 | 1550 |
| SPAX 1007 | 3.67 | 0.083 | 1025 | SPAX 1550 | 5.08 | 0.128 | 1568 |
| SPAX 1060 | 3.81 | 0.087 | 1078 | SPAX 1582 | 5.16 | 0.130 | 1600 |
| SPAX 1120 | 3.96 | 0.092 | 1138 | SPAX 1600 | 5.21 | 0.132 | 1618 |
| SPAX 1150 | 4.04 | 0.095 | 1168 | SPAX 1607 | 5.23 | 0.132 | 1625 |
| SPAX 1180 | 4.12 | 0.097 | 1198 | SPAX 1650 | 5.34 | 0.135 | 1668 |
| SPAX 1232 | 4.26 | 0.101 | 1250 | SPAX 1700 | 5.47 | 0.140 | 1718 |
| SPAX 1250 | 4.30 | 0.103 | 1268 | SPAX 1750 | 5.60 | 0.143 | 1768 |
| SPAX 1282 | 4.38 | 0.106 | 1300 | SPAX 1782 | 5.68 | 0.147 | 1800 |
| SPAX 1300 | 4.43 | 0.107 | 1318 | SPAX 1800 | 5.72 | 0.148 | 1818 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| SPAX 1832 | 5.81 | 0.151 | 1850 | SPAX 2307 | 7.03 | 0.190 | 2325 |
| SPAX 1850 | 5.85 | 0.152 | 1868 | SPAX 2332 | 7.09 | 0.192 | 2350 |
| SPAX 1882 | 5.94 | 0.155 | 1900 | SPAX 2360 | 7.16 | 0.194 | 2378 |
| SPAX 1900 | 5.98 | 0.156 | 1918 | SPAX 2382 | 7.22 | 0.196 | 2400 |
| SPAX 1950 | 6.11 | 0.161 | 1968 | SPAX 2432 | 7.35 | 0.200 | 2450 |
| SPAX 1982 | 6.19 | 0.163 | 2000 | SPAX 2482 | 7.48 | 0.204 | 2500 |
| SPAX 2000 | 6.24 | 0.165 | 2018 | SPAX 2500 | 7.52 | 0.206 | 2518 |
| SPAX 2032 | 6.32 | 0.167 | 2050 | SPAX 2532 | 7.60 | 0.208 | 2550 |
| SPAX 2057 | 6.39 | 0.169 | 2075 | SPAX 2582 | 7.73 | 0.212 | 2600 |
| SPAX 2120 | 6.55 | 0.175 | 2138 | SPAX 2607 | 7.80 | 0.214 | 2625 |
| SPAX 2182 | 6.71 | 0.180 | 2200 | SPAX 2650 | 7.90 | 0.218 | 2668 |
| SPAX 2207 | 6.77 | 0.182 | 2225 | SPAX 2682 | 7.99 | 0.220 | 2700 |
| SPAX 2232 | 6.84 | 0.184 | 2250 | SPAX 2732 | 8.11 | 0.224 | 2750 |
| SPAX 2240 | 6.86 | 0.185 | 2258 | SPAX 2782 | 8.24 | 0.228 | 2800 |
| SPAX 2282 | 6.96 | 0.188 | 2300 | SPAX 2800 | 8.29 | 0.318 | 2818 |
| SPAX 2300 | 7.01 | 0.189 | 2318 | SPAX 3000 | 8.80 | 0.341 | 3018 |


Nominal Dimension



SPBX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| SPBX 1250(mm) | 7.22 | 0.238 | 1272 | SPBX 2120 | 11.07 | 0.403 | 2142 |
| SPBX 1260 | 7.27 | 0.239 | 1282 | SPBX 2150 | 11.20 | 0.409 | 2172 |
| SPBX 1320 | 7.54 | 0.251 | 1342 | SPBX 2180 | 11.33 | 0.414 | 2202 |
| SPBX 1340 | 7.63 | 0.255 | 1362 | SPBX 2240 | 11.58 | 0.426 | 2262 |
| SPBX 1400 | 7.90 | 0.266 | 1422 | SPBX 2280 | 11.76 | 0.433 | 2302 |
| SPBX 1410 | 7.94 | 0.269 | 1432 | SPBX 2360 | 12.10 | 0.448 | 2382 |
| SPBX 1450 | 8.12 | 0.276 | 1472 | SPBX 2410 | 12.31 | 0.458 | 2432 |
| SPBX 1500 | 8.35 | 0.285 | 1522 | SPBX 2500 | 12.69 | 0.475 | 2522 |
| SPBX 1600 | 8.79 | 0.304 | 1622 | SPBX 2530 | 12.82 | 0.481 | 2552 |
| SPBX 1700 | 9.23 | 0.323 | 1722 | SPBX 2650 | 13.32 | 0.504 | 2672 |
| SPBX 1800 | 9.68 | 0.342 | 1822 | SPBX 2680 | 13.45 | 0.508 | 2702 |
| SPBX 1900 | 10.11 | 0.361 | 1922 | SPBX 2800 | 13.95 | 0.531 | 2822 |
| SPBX 2000 | 10.55 | 0.380 | 2022 | SPBX 3000 | 14.77 | 0.569 | 3022 |
| SPBX 2020 | 10.64 | 0.384 | 2042 | | | | |

Nominal Dimension




SPCX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|------------|---------------|--------------------|
| SPCX 2000(mm) | 17.61 | 0.710 | 2030 |
| SPCX 2120 | 18.44 | 0.753 | 2150 |
| SPCX 2240 | 19.27 | 0.795 | 2270 |
| SPCX 2360 | 20.08 | 0.838 | 2390 |
| SPCX 2500 | 21.02 | 0.888 | 2530 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|
| SPCX 2650 | 22.01 | 0.942 | 2680 |
| SPCX 2800 | 22.99 | 0.995 | 2830 |
| SPCX 3000 | 24.27 | 1.065 | 3030 |
| SPCX 5050 | 35.92 | 1.793 | 5080 |

Industrial Belt - Joined V-Belt

Wrapped Belt



Features

The belt prevents abrasion caused by length differences among v-shaped belt used on one pulley, It can adjust the hold based on the need.

Nominal Dimension




A Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|---------|------------|---------------|--------------------|
| A 45(inch) | 14 | 90.62 | 2.734 | 1187 |
| A 47 | 14 | 93.44 | 2.856 | 1238 |
| A 48 | 32 | 268.53 | 6.666 | 1263 |
| A 50 | 32 | 275.03 | 6.944 | 1314 |
| A 51 | 32 | 278.27 | 7.083 | 1339 |
| A 55 | 32 | 291.10 | 7.639 | 1441 |
| A 56 | 32 | 294.28 | 7.778 | 1466 |
| A 57 | 32 | 297.45 | 7.916 | 1492 |
| A 58 | 32 | 300.61 | 8.055 | 1517 |
| A 59 | 32 | 303.76 | 8.194 | 1543 |
| A 60 | 32 | 306.90 | 8.333 | 1568 |
| A 64 | 32 | 319.36 | 8.889 | 1670 |
| A 67 | 32 | 328.58 | 9.305 | 1746 |
| A 68 | 32 | 331.64 | 9.444 | 1771 |
| A 69 | 32 | 334.68 | 9.583 | 1797 |
| A 71 | 32 | 340.74 | 9.861 | 1847 |
| A 74 | 32 | 349.75 | 10.277 | 1924 |
| A 75 | 32 | 352.73 | 10.416 | 1949 |
| A 76 | 32 | 355.70 | 10.555 | 1974 |
| A 78 | 32 | 361.61 | 10.833 | 2025 |

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|---------|------------|---------------|--------------------|
| A 79 | 32 | 364.55 | 10.972 | 2051 |
| A 82 | 32 | 373.31 | 11.388 | 2127 |
| A 83 | 32 | 376.20 | 11.527 | 2152 |
| A 84 | 32 | 379.09 | 11.666 | 2178 |
| A 85 | 32 | 381.97 | 11.805 | 2203 |
| A 88 | 32 | 390.53 | 12.222 | 2279 |
| A 90 | 32 | 396.19 | 12.500 | 2330 |
| A 96 | 32 | 412.91 | 13.333 | 2482 |
| A 98 | 32 | 418.40 | 13.611 | 2533 |
| A 100 | 32 | 423.84 | 13.888 | 2584 |
| A 102 | 32 | 429.25 | 14.166 | 2635 |
| A 104 | 32 | 434.61 | 14.444 | 2686 |
| A 105 | 32 | 437.28 | 14.583 | 2711 |
| A 106 | 32 | 439.93 | 14.722 | 2736 |
| A 110 | 32 | 450.44 | 15.277 | 2838 |
| A 150 | 32 | 546.30 | 20.833 | 3854 |
| A 200 | 32 | 782.26 | 27.777 | 5124 |
| A 225 | 32 | 807.90 | 31.249 | 5759 |
| A 240 | 32 | 823.30 | 33.322 | 6140 |

Nominal Dimension



B Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|---------|------------|---------------|--------------------|----------|---------|------------|---------------|--------------------|
| B 48(inch) | 28 | 322.37 | 9.148 | 1269 | B 83 | 28 | 431.79 | 15.818 | 2158 |
| B 49 | 28 | 325.49 | 9.338 | 1295 | B 84 | 28 | 434.93 | 16.009 | 2184 |
| B 50 | 28 | 328.61 | 9.529 | 1320 | B 85 | 28 | 438.06 | 16.199 | 2209 |
| B 51 | 28 | 331.73 | 9.720 | 1346 | B 86 | 28 | 441.19 | 16.390 | 2235 |
| B 52 | 28 | 334.85 | 9.910 | 1371 | B 88 | 28 | 447.46 | 16.771 | 2285 |
| B 53 | 28 | 337.97 | 10.101 | 1396 | B 89 | 28 | 450.59 | 16.961 | 2311 |
| B 55 | 28 | 344.22 | 10.482 | 1447 | B 90 | 28 | 453.73 | 17.152 | 2336 |
| B 56 | 28 | 347.34 | 10.672 | 1473 | B 91 | 28 | 456.87 | 17.343 | 2362 |
| B 57 | 28 | 350.46 | 10.863 | 1498 | B 92 | 28 | 460.00 | 17.533 | 2387 |
| B 58 | 28 | 353.59 | 11.054 | 1523 | B 93 | 28 | 463.14 | 17.724 | 2412 |
| B 59 | 28 | 356.71 | 11.244 | 1549 | B 95 | 28 | 469.41 | 18.105 | 2463 |
| B 60 | 28 | 359.84 | 11.435 | 1574 | B 96 | 28 | 472.55 | 18.296 | 2489 |
| B 61 | 28 | 362.96 | 11.625 | 1600 | B 97 | 28 | 475.69 | 18.486 | 2514 |
| B 62 | 28 | 366.09 | 11.816 | 1625 | B 98 | 28 | 478.82 | 18.677 | 2539 |
| B 63 | 28 | 369.21 | 12.007 | 1650 | B 99 | 28 | 481.96 | 18.867 | 2565 |
| B 64 | 28 | 372.34 | 12.197 | 1676 | B 100 | 28 | 485.10 | 19.058 | 2590 |
| B 65 | 28 | 375.46 | 12.388 | 1701 | B 101 | 28 | 488.24 | 19.249 | 2616 |
| B 66 | 28 | 378.59 | 12.578 | 1727 | B 102 | 28 | 491.38 | 19.439 | 2641 |
| B 67 | 28 | 381.72 | 12.769 | 1752 | B 103 | 28 | 494.52 | 19.630 | 2666 |
| B 68 | 28 | 384.84 | 12.959 | 1777 | B 104 | 28 | 497.66 | 19.820 | 2692 |
| B 70 | 28 | 391.10 | 13.341 | 1828 | B 105 | 28 | 500.80 | 20.011 | 2717 |
| B 71 | 28 | 394.23 | 13.531 | 1854 | B 106 | 28 | 503.94 | 20.201 | 2743 |
| B 72 | 28 | 397.35 | 13.722 | 1879 | B 107 | 26 | 507.08 | 20.392 | 2768 |
| B 73 | 28 | 400.48 | 13.912 | 1904 | B 110 | 26 | 516.51 | 20.964 | 2844 |
| B 75 | 28 | 406.74 | 14.294 | 1955 | B 150 | 26 | 642.49 | 28.587 | 3860 |
| B 77 | 28 | 413.00 | 14.675 | 2006 | B 210 | 26 | 832.55 | 40.022 | 5384 |
| B 78 | 28 | 416.13 | 14.865 | 2031 | B 255 | 26 | 975.94 | 48.598 | 6527 |
| B 79 | 28 | 419.26 | 15.056 | 2057 | B 300 | 26 | 1120.06 | 57.174 | 7670 |
| B 80 | 28 | 422.40 | 15.246 | 2082 | B 400 | 26 | 1442.94 | 76.232 | 10210 |
| B 81 | 28 | 425.53 | 15.437 | 2108 | B 500 | 26 | 1769.42 | 95.290 | 12750 |
| B 82 | 28 | 428.66 | 15.628 | 2133 | B 530 | 26 | 1868.07 | 101.007 | 13512 |


Nominal Dimension



C Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------|---------|------------|---------------|--------------------|----------|---------|------------|---------------|--------------------|
| C 50(inch) | 22 | 367.92 | 11.880 | 1330 | C 96 | 22 | 474.53 | 22.810 | 2498 |
| C 65 | 22 | 397.15 | 15.444 | 1711 | C 98 | 22 | 480.30 | 23.285 | 2549 |
| C 68 | 22 | 403.64 | 16.157 | 1787 | C 100 | 22 | 486.18 | 23.760 | 2600 |
| C 72 | 22 | 412.62 | 17.107 | 1888 | C 103 | 22 | 495.16 | 24.473 | 2676 |
| C 75 | 22 | 419.61 | 17.820 | 1965 | C 105 | 22 | 501.27 | 24.948 | 2727 |
| C 78 | 22 | 426.81 | 18.533 | 2041 | C 108 | 22 | 510.62 | 25.661 | 2803 |
| C 80 | 22 | 431.73 | 19.008 | 2092 | C 112 | 22 | 523.41 | 26.693 | 2904 |
| C 81 | 22 | 434.23 | 19.246 | 2117 | C 151 | 22 | 668.09 | 35.987 | 3895 |
| C 83 | 22 | 439.29 | 19.721 | 2168 | C 204 | 22 | 922.74 | 48.619 | 5241 |
| C 85 | 22 | 444.45 | 20.196 | 2219 | C 255 | 22 | 1230.89 | 60.773 | 6537 |
| C 87 | 22 | 449.71 | 20.671 | 2269 | C 300 | 22 | 1554.20 | 71.498 | 7680 |
| C 88 | 22 | 452.37 | 20.909 | 2295 | C 360 | 22 | 2060.25 | 85.797 | 9204 |
| C 90 | 22 | 457.76 | 21.384 | 2346 | C 420 | 22 | 2651.97 | 100.097 | 10728 |

Nominal Dimension




D Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|---------|------------|---------------|--------------------|----------|---------|------------|---------------|--------------------|
| D 128(inch) | 15 | 760.48 | 34.367 | 3327 | D 285 | 15 | 988.92 | 76.521 | 7314 |
| D 144 | 15 | 768.85 | 38.663 | 3733 | D 300 | 15 | 1027.80 | 80.548 | 7695 |
| D 158 | 15 | 778.95 | 42.422 | 4089 | D 315 | 15 | 1069.65 | 84.575 | 8076 |
| D 210 | 15 | 839.15 | 56.384 | 5409 | D 360 | 15 | 1213.04 | 96.660 | 9219 |
| D 225 | 15 | 863.15 | 60.411 | 5790 | D 390 | 15 | 1323.51 | 104.712 | 9981 |
| D 240 | 15 | 890.13 | 64.438 | 6171 | D 480 | 15 | 1726.30 | 128.877 | 12267 |
| D 270 | 15 | 953.02 | 72.493 | 6933 | D 600 | 15 | 2429.90 | 161.097 | 15315 |

Industrial Belt - Joined V-Belt

Narrow Belt



Features

- Higher power transmission efficiency
- The use of smaller pulley
- Space saving
- Excellent resistance against heat, oil and wear

Nominal Dimension



3V Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|---------|------------|---------------|--------------------|----------|---------|------------|---------------|--------------------|
| 3V 500(10in.) | 54 | 326.37 | 7.984 | 1293 | 3V 900 | 54 | 425.67 | 14.371 | 2309 |
| 3V 530 | 54 | 329.12 | 8.463 | 1369 | 3V 950 | 54 | 447.60 | 15.170 | 2436 |
| 3V 560 | 54 | 332.64 | 8.942 | 1445 | 3V 1000 | 54 | 471.64 | 15.968 | 2563 |
| 3V 600 | 54 | 338.51 | 9.581 | 1547 | 3V 1060 | 54 | 503.28 | 16.926 | 2715 |
| 3V 630 | 54 | 343.80 | 10.060 | 1623 | 3V 1120 | 48 | 537.96 | 15.897 | 2868 |
| 3V 670 | 54 | 352.04 | 10.699 | 1725 | 3V 1180 | 48 | 575.69 | 16.748 | 3020 |
| 3V 710 | 54 | 361.63 | 11.337 | 1826 | 3V 1250 | 48 | 623.55 | 17.742 | 3198 |
| 3V 750 | 54 | 372.58 | 11.976 | 1928 | 3V 1320 | 48 | 675.56 | 18.736 | 3376 |
| 3V 800 | 54 | 388.16 | 12.774 | 2055 | 3V 1400 | 48 | 740.06 | 19.871 | 3579 |
| 3V 850 | 54 | 405.86 | 13.573 | 2182 | 3V 1480 | 48 | 809.98 | 21.005 | 3782 |

Nominal Dimension




5V Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|---------|------------|---------------|--------------------|----------|---------|------------|---------------|--------------------|
| 5V 530(10in.) | 30 | 437.02 | 12.118 | 1367 | 5V 950 | 30 | 638.48 | 21.721 | 2434 |
| 5V 560 | 30 | 451.42 | 12.804 | 1443 | 5V 1000 | 30 | 662.44 | 22.864 | 2561 |
| 5V 600 | 30 | 470.62 | 13.718 | 1545 | 5V 1050 | 30 | 686.40 | 24.007 | 2688 |
| 5V 630 | 30 | 485.01 | 14.404 | 1621 | 5V 1060 | 30 | 691.19 | 24.232 | 2713 |
| 5V 670 | 30 | 504.20 | 15.319 | 1723 | 5V 1120 | 30 | 719.94 | 25.610 | 2866 |
| 5V 710 | 30 | 523.39 | 16.233 | 1824 | 5V 1180 | 30 | 748.68 | 26.982 | 3018 |
| 5V 750 | 30 | 542.58 | 17.148 | 1926 | 5V 1200 | 30 | 758.26 | 27.432 | 3069 |
| 5V 800 | 30 | 566.56 | 18.291 | 2053 | 5V 1210 | 30 | 763.05 | 27.661 | 3094 |
| 5V 850 | 30 | 590.54 | 19.434 | 2180 | 5V 1250 | 30 | 782.20 | 28.582 | 3196 |
| 5V 900 | 30 | 614.51 | 20.578 | 2307 | 5V 1320 | 30 | 815.71 | 30.175 | 3374 |

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|---------|------------|---------------|--------------------|
| 5V 1400 | 30 | 854.01 | 32.004 | 3577 |
| 5V 1500 | 30 | 901.86 | 34.299 | 3831 |
| 5V 1600 | 30 | 949.70 | 36.586 | 4085 |
| 5V 1650 | 30 | 973.61 | 37.729 | 4212 |
| 5V 1700 | 30 | 997.52 | 38.872 | 4339 |
| 5V 1800 | 30 | 1045.32 | 41.148 | 4593 |
| 5V 1900 | 30 | 1093.11 | 43.445 | 4847 |
| 5V 2000 | 30 | 1140.88 | 45.732 | 5101 |
| 5V 2120 | 30 | 1198.19 | 48.476 | 5406 |

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|---------|------------|---------------|--------------------|
| 5V 2240 | 30 | 1255.47 | 51.220 | 5710 |
| 5V 2360 | 30 | 1312.73 | 53.964 | 6015 |
| 5V 2500 | 30 | 1379.50 | 57.150 | 6371 |
| 5V 2650 | 30 | 1451.01 | 60.579 | 6752 |
| 5V 2800 | 30 | 1522.48 | 64.025 | 7133 |
| 5V 3000 | 30 | 1617.72 | 68.598 | 7641 |
| 5V 3150 | 30 | 1689.11 | 72.028 | 8022 |
| 5V 3350 | 30 | 1784.24 | 76.601 | 8530 |

Nominal Dimension




8V Section

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------------|---------|------------|---------------|--------------------|
| 8V 1060(10in.) | 20 | 742.00 | 37.987 | 2708 |
| 8V 1120 | 20 | 792.30 | 40.137 | 2861 |
| 8V 1180 | 20 | 842.16 | 42.287 | 3013 |
| 8V 1320 | 20 | 956.84 | 47.304 | 3369 |
| 8V 1500 | 20 | 1100.86 | 53.754 | 3826 |
| 8V 1600 | 20 | 1179.20 | 57.338 | 4080 |
| 8V 1700 | 20 | 1256.35 | 60.921 | 4334 |
| 8V 1800 | 20 | 1332.30 | 64.505 | 4588 |
| 8V 1900 | 20 | 1407.07 | 68.088 | 4842 |
| 8V 2000 | 20 | 1480.64 | 71.672 | 5096 |
| 8V 2120 | 20 | 1567.35 | 75.972 | 5401 |
| 8V 2240 | 20 | 1652.35 | 80.273 | 5705 |
| 8V 2360 | 20 | 1735.63 | 84.573 | 6010 |
| 8V 2400 | 20 | 1763.01 | 86.006 | 6112 |

| Belt No. | Max Rib | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|---------|------------|---------------|--------------------|
| 8V 2500 | 20 | 1830.62 | 89.590 | 6366 |
| 8V 2650 | 20 | 1929.80 | 94.923 | 6747 |
| 8V 2800 | 20 | 2026.30 | 100.341 | 7128 |
| 8V 3000 | 20 | 2150.80 | 107.508 | 7636 |
| 8V 3150 | 20 | 2241.04 | 112.883 | 8017 |
| 8V 3350 | 20 | 2357.20 | 120.051 | 8525 |
| 8V 3550 | 20 | 2468.58 | 127.218 | 9033 |
| 8V 3750 | 20 | 2575.20 | 134.385 | 9541 |
| 8V 4000 | 20 | 2701.76 | 143.344 | 10176 |
| 8V 4250 | 20 | 2820.88 | 152.235 | 10811 |
| 8V 4500 | 20 | 2932.54 | 161.190 | 11446 |
| 8V 4750 | 20 | 3036.76 | 170.221 | 12081 |
| 8V 5300 | 20 | 3239.80 | 189.931 | 13478 |

Industrial Belt - Joined V-Belt

Raw Edge Cogged Belt



Features

- Minimize temporary shock & vibration
- Prevent popping on the pulley & torsion of belt
- Stabilize tension
- Maintains the length stability

Nominal Dimension



3VX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|------------|------------|---------------|--------------------|
| 2R 3VX 460 | 8.31 | 0.203 | 1188 | 4R 3VX600 | 21.91 | 0.530 | 1544 |
| 2R 3VX 470 | 8.50 | 0.207 | 1213 | 4R 3VX800 | 22.99 | 0.707 | 2052 |
| 2R 3VX 500 | 9.05 | 0.221 | 1290 | 4R 3VX1000 | 24.52 | 0.884 | 2560 |
| 2R 3VX 600 | 10.63 | 0.265 | 1544 | 4R 3VX1200 | 26.50 | 1.060 | 3068 |
| 2R 3VX 630 | 11.03 | 0.278 | 1620 | 4R 3VX2000 | 38.89 | 1.768 | 5100 |
| 2R 3VX 670 | 11.51 | 0.296 | 1721 | 5R 3VX400 | 23.47 | 0.443 | 1036 |
| 2R 3VX 710 | 11.93 | 0.314 | 1823 | 5R 3VX450 | 24.89 | 0.498 | 1163 |
| 2R 3VX 1000 | 13.12 | 0.441 | 2560 | 5R 3VX475 | 25.58 | 0.525 | 1226 |
| 3R 3VX335 | 15.92 | 0.222 | 870 | 5R 3VX500 | 26.28 | 0.553 | 1290 |
| 3R 3VX375 | 16.49 | 0.249 | 972 | 5R 3VX530 | 27.09 | 0.587 | 1366 |
| 3R 3VX425 | 17.15 | 0.282 | 1099 | 5R 3VX560 | 27.90 | 0.619 | 1442 |
| 3R 3VX450 | 17.46 | 0.299 | 1163 | 5R 3VX600 | 28.96 | 0.664 | 1544 |
| 3R 3VX475 | 17.75 | 0.316 | 1226 | 5R 3VX630 | 29.74 | 0.697 | 1620 |
| 3R 3VX500 | 18.03 | 0.332 | 1290 | 5R 3VX670 | 30.76 | 0.741 | 1721 |
| 3R 3VX560 | 18.64 | 0.372 | 1442 | 5R 3VX710 | 31.76 | 0.786 | 1823 |
| 3R 3VX574 | 18.77 | 0.379 | 1478 | 5R 3VX750 | 32.74 | 0.830 | 1925 |
| 3R 3VX600 | 19.00 | 0.398 | 1544 | 5R 3VX760 | 32.98 | 0.841 | 1950 |
| 3R 3VX630 | 19.25 | 0.418 | 1620 | 5R 3VX800 | 33.94 | 0.885 | 2052 |
| 3R 3VX670 | 19.55 | 0.445 | 1721 | 5R 3VX900 | 36.23 | 0.996 | 2306 |
| 3R 3VX710 | 19.81 | 0.471 | 1823 | 5R 3VX950 | 37.34 | 1.051 | 2433 |
| 3R 3VX850 | 20.42 | 0.565 | 2179 | 5R 3VX1000 | 38.40 | 1.107 | 2560 |
| 3R 3VX1000 | 20.58 | 0.663 | 2560 | 5R 3VX1200 | 42.36 | 1.328 | 3068 |
| 4R 3VX475 | 21.46 | 0.420 | 1226 | 5R 3VX2000 | 53.06 | 2.213 | 5100 |
| 4R 3VX500 | 21.54 | 0.442 | 1290 | | | | |

Nominal Dimension



5VX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|------------|---------------|--------------------|-------------|------------|---------------|--------------------|
| 2R 5VX 500 | 16.45 | 0.606 | 1291 | 3R 5VX 600 | 26.42 | 1.094 | 1545 |
| 2R 5VX 530 | 17.13 | 0.643 | 1367 | 3R 5VX 630 | 27.36 | 1.149 | 1621 |
| 2R 5VX 560 | 17.81 | 0.679 | 1443 | 3R 5VX 670 | 28.60 | 1.222 | 1723 |
| 2R 5VX 600 | 18.73 | 0.728 | 1545 | 3R 5VX 710 | 29.83 | 1.295 | 1824 |
| 2R 5VX 630 | 19.42 | 0.764 | 1621 | 3R 5VX 750 | 31.06 | 1.368 | 1926 |
| 2R 5VX 670 | 20.35 | 0.813 | 1723 | 3R 5VX 800 | 32.59 | 1.459 | 2053 |
| 2R 5VX 710 | 21.28 | 0.861 | 1824 | 3R 5VX 850 | 34.11 | 1.550 | 2180 |
| 2R 5VX 750 | 22.22 | 0.910 | 1926 | 3R 5VX 900 | 35.63 | 1.641 | 2307 |
| 2R 5VX 800 | 23.39 | 0.970 | 2053 | 3R 5VX 950 | 37.13 | 1.732 | 2434 |
| 2R 5VX 850 | 24.58 | 1.031 | 2180 | 3R 5VX 1000 | 38.63 | 1.823 | 2561 |
| 2R 5VX 900 | 25.78 | 1.092 | 2307 | 3R 5VX 1060 | 40.42 | 1.933 | 2713 |
| 2R 5VX 950 | 26.98 | 1.152 | 2434 | 3R 5VX 1120 | 42.19 | 2.042 | 2866 |
| 2R 5VX 1000 | 28.19 | 1.213 | 2561 | 3R 5VX 1180 | 43.95 | 2.152 | 3018 |
| 2R 5VX 1060 | 29.65 | 1.286 | 2713 | 3R 5VX 1250 | 46.00 | 2.279 | 3196 |
| 2R 5VX 1120 | 31.12 | 1.358 | 2866 | 3R 5VX 1320 | 48.02 | 2.407 | 3374 |
| 2R 5VX 1180 | 32.61 | 1.431 | 3018 | 3R 5VX 1400 | 50.32 | 2.553 | 3577 |
| 2R 5VX 1250 | 34.36 | 1.516 | 3196 | 3R 5VX 1500 | 53.17 | 2.735 | 3831 |
| 2R 5VX 1320 | 36.12 | 1.601 | 3374 | 3R 5VX 1600 | 55.98 | 2.918 | 4085 |
| 2R 5VX 1400 | 38.16 | 1.698 | 3577 | 3R 5VX 1700 | 58.76 | 3.100 | 4339 |
| 3R 5VX 500 | 23.29 | 0.912 | 1291 | 3R 5VX 1800 | 61.50 | 3.282 | 4593 |
| 3R 5VX 530 | 24.23 | 0.966 | 1367 | 3R 5VX 1900 | 64.22 | 3.465 | 4847 |
| 3R 5VX 560 | 25.17 | 1.021 | 1443 | 3R 5VX 2000 | 66.90 | 3.647 | 5101 |

Nominal Dimension




BX Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|----------|------------|---------------|--------------------|
| 2R BX 51 | 17.03 | 0.438 | 1343 | 2R BX 64 | 19.71 | 0.550 | 1673 |
| 2R BX 53 | 17.45 | 0.455 | 1393 | 2R BX 65 | 19.92 | 0.558 | 1698 |
| 2R BX 55 | 17.86 | 0.472 | 1444 | 2R BX 66 | 20.12 | 0.567 | 1724 |
| 2R BX 56 | 18.07 | 0.481 | 1470 | 2R BX 67 | 20.32 | 0.575 | 1749 |
| 2R BX 58 | 18.48 | 0.498 | 1520 | 2R BX 68 | 20.52 | 0.584 | 1774 |
| 2R BX 59 | 18.69 | 0.507 | 1546 | 2R BX 70 | 20.93 | 0.601 | 1825 |
| 2R BX 60 | 18.90 | 0.515 | 1571 | 2R BX 71 | 21.13 | 0.610 | 1851 |
| 2R BX 61 | 19.10 | 0.524 | 1597 | 2R BX 75 | 21.92 | 0.644 | 1952 |
| 2R BX 62 | 19.30 | 0.532 | 1622 | 2R BX 77 | 22.32 | 0.661 | 2003 |
| 2R BX 63 | 19.51 | 0.541 | 1647 | 2R BX 78 | 22.52 | 0.670 | 2028 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| 2R BX 79 | 22.71 | 0.679 | 2054 | 3R BX 64 | 27.55 | 0.825 | 1673 |
| 2R BX 80 | 22.91 | 0.687 | 2079 | 3R BX 65 | 27.85 | 0.837 | 1698 |
| 2R BX 81 | 23.10 | 0.696 | 2105 | 3R BX 66 | 28.15 | 0.850 | 1724 |
| 2R BX 83 | 23.49 | 0.713 | 2155 | 3R BX 67 | 28.45 | 0.863 | 1749 |
| 2R BX 85 | 23.88 | 0.730 | 2206 | 3R BX 68 | 28.75 | 0.876 | 1774 |
| 2R BX 90 | 24.84 | 0.773 | 2333 | 3R BX 70 | 29.34 | 0.902 | 1825 |
| 2R BX 91 | 25.04 | 0.782 | 2359 | 3R BX 71 | 29.64 | 0.915 | 1851 |
| 2R BX 93 | 25.42 | 0.799 | 2409 | 3R BX 75 | 30.83 | 0.966 | 1952 |
| 2R BX 95 | 25.80 | 0.816 | 2460 | 3R BX 77 | 31.41 | 0.992 | 2003 |
| 2R BX 97 | 26.17 | 0.833 | 2511 | 3R BX 78 | 31.71 | 1.005 | 2028 |
| 2R BX 100 | 26.73 | 0.859 | 2587 | 3R BX 79 | 32.00 | 1.018 | 2054 |
| 2R BX 103 | 27.29 | 0.885 | 2663 | 3R BX 80 | 32.29 | 1.031 | 2079 |
| 2R BX 105 | 27.66 | 0.902 | 2714 | 3R BX 81 | 32.59 | 1.044 | 2105 |
| 2R BX 108 | 28.21 | 0.928 | 2790 | 3R BX 83 | 33.17 | 1.069 | 2155 |
| 2R BX 112 | 28.94 | 0.962 | 2892 | 3R BX 85 | 33.75 | 1.095 | 2206 |
| 2R BX 120 | 30.37 | 1.031 | 3095 | 3R BX 90 | 35.19 | 1.160 | 2333 |
| 2R BX 128 | 31.77 | 1.099 | 3298 | 3R BX 91 | 35.48 | 1.172 | 2359 |
| 2R BX 136 | 33.15 | 1.168 | 3502 | 3R BX 93 | 36.05 | 1.198 | 2409 |
| 2R BX 144 | 34.49 | 1.237 | 3705 | 3R BX 95 | 36.62 | 1.224 | 2460 |
| 2R BX 158 | 36.77 | 1.357 | 4060 | 3R BX 97 | 37.18 | 1.250 | 2511 |
| 2R BX 173 | 39.11 | 1.486 | 4441 | 3R BX 100 | 38.03 | 1.288 | 2587 |
| 2R BX 180 | 40.16 | 1.546 | 4619 | 3R BX 103 | 38.87 | 1.327 | 2663 |
| 2R BX 195 | 42.35 | 1.675 | 5000 | 3R BX 105 | 39.43 | 1.353 | 2714 |
| 3R BX 51 | 23.58 | 0.657 | 1343 | 3R BX 108 | 40.26 | 1.391 | 2790 |
| 3R BX 53 | 24.20 | 0.683 | 1393 | 3R BX 112 | 41.37 | 1.443 | 2892 |
| 3R BX 55 | 24.81 | 0.709 | 1444 | 3R BX 120 | 43.55 | 1.546 | 3095 |
| 3R BX 56 | 25.12 | 0.721 | 1470 | 3R BX 128 | 45.69 | 1.649 | 3298 |
| 3R BX 58 | 25.73 | 0.747 | 1520 | 3R BX 136 | 47.80 | 1.752 | 3502 |
| 3R BX 59 | 26.03 | 0.760 | 1546 | 3R BX 144 | 49.87 | 1.855 | 3705 |
| 3R BX 60 | 26.34 | 0.773 | 1571 | 3R BX 158 | 53.42 | 2.036 | 4060 |
| 3R BX 61 | 26.64 | 0.786 | 1597 | 3R BX 173 | 57.09 | 2.229 | 4441 |
| 3R BX 62 | 26.94 | 0.799 | 1622 | 3R BX 180 | 58.77 | 2.319 | 4619 |
| 3R BX 63 | 27.24 | 0.812 | 1647 | 3R BX 195 | 62.26 | 2.512 | 5000 |

Industrial Belt - V-Ribbed Belt

V-ribbed belt have wide top width and thin thickness, it provides consistent tension while driving by connecting in the each rib. It is also called Poly V-belt or Micro V-belt.




Features

- The wide width and thin height provide the excellent flexibility.
- High power transmission under operational conditions of high-speed rotation, reverse bending and a small diameter pulley.
- Maintains consistent tension during operation for cords of high modulus and low shrinkage.
- Excellent in resistance against heat, oil and wear.
- Enhances power transmission efficiency by reducing slip during operation.

| Construction | Functions | Materials |
|----------------------|--|-------------------|
| ① Upper fabric | Protects internal tension member | Cotton, synthetic |
| ② Adhesion rubber | Supports and protects adhesiveness of tension member | CR, EPDM |
| ③ Tension member | Primary material for transferring power | Polyester, Nylon |
| ④ Compression rubber | Maintains belt shape and enhances side pressure | CR, EPDM |

CR: Chloroprene Rubber / EPDM: Ethylene Propylene Diene Monomer

Nominal Dimension



J Section

| Belt No. | Max Rib | Belt No. | Max Rib | Belt No. | Max Rib | Belt No. | Max Rib |
|----------|---------|----------|---------|----------|---------|----------|---------|
| 180PJ | 30 | 300PJ | 30 | 430PJ | 30 | 610PJ | 30 |
| 190PJ | 30 | 320PJ | 30 | 460PJ | 30 | 650PJ | 30 |
| 200PJ | 30 | 340PJ | 30 | 490PJ | 30 | 730PJ | 30 |
| 220PJ | 30 | 360PJ | 30 | 520PJ | 30 | 870PJ | 30 |
| 240PJ | 30 | 380PJ | 30 | 550PJ | 30 | 920PJ | 30 |
| 260PJ | 30 | 400PJ | 30 | 580PJ | 30 | 980PJ | 30 |
| 280PJ | 30 | | | | | | |


| Grinded PJ belt |

- Materials : CR based
- Tension member : Polyester Cable Cord (P.C.C)

| Molded PJ belt |

- Materials : CR/BR based
- Tension member : Nylon
- Max Rib : 210 Ribs


Nominal Dimension



L Section

| Belt No. | Belt No. | Belt No. | Belt No. |
|-------------|----------|----------|----------|
| PL500(inch) | PL695 | PL865 | PL1150 |
| PL540 | PL725 | PL915 | PL1215 |
| PL560 | PL765 | PL975 | PL1230 |
| PL615 | PL780 | PL990 | PL1295 |
| PL635 | PL795 | PL1065 | PL1310 |
| PL655 | PL815 | PL1120 | PL1455 |
| PL675 | PL840 | | |

Nominal Dimension



M Section

| Belt No. | Belt No. | Belt No. | Belt No. |
|-------------|----------|----------|----------|
| PM900(inch) | PM1185 | PM1650 | PM2560 |
| PM940 | PM1230 | PM1760 | PM2710 |
| PM990 | PM1310 | PM1830 | PM3010 |
| PM1060 | PM1390 | PM1980 | PM3310 |
| PM1115 | PM1470 | PM2130 | PM3610 |
| PM1150 | PM1610 | PM2410 | |

Nominal Dimension




H Section

PH Belt are available upon request.

Industrial Belt - Timing Belt

Timing belt function a synchronous driving like a gear or chain, it is so called synchronous belt.



Features

- May solve problems which can be happen by using the chain related to degrading power transmission during high-speed operation, and the distance problem between the driving and the driven part, and driving problem under the conditions of oil spreading.
- Prevents belt elasticity by using glass fiber for tension member.
- Excellent in resistance against heat, oil and wear.
- Guarantees high power transmission efficiency under driving conditions of high speed and severe temperature fluctuation.
- Show stable performance on high-speed rotation.

| Construction | Functions | Materials |
|------------------|---|-------------|
| ① Rear rubber | Protects tension member | CR, HNBR |
| ② Tension member | Primary material for transferring power | Glass Fiber |
| ③ Teeth rubber | Protects tension member, maintains belt shape | CR, HNBR |
| ④ Bottom fabric | Maintains belt and teeth shape | Nylon |

CR : Chloroprene Rubber / HNBR : Hydrogenated Acrylonitrile-Butadiene Rubber

Nominal Dimension

2.032
 : 0.51 ; 1.14

MXL Section

| Belt No. | List Price | Wt.(Approx)kg |
|------------|------------|---------------|
| 200MXL1800 | 93.23 | 0.84 |
| 236MXL1800 | 98.72 | 0.98 |

| Belt No. | List Price | Wt.(Approx)kg |
|------------|------------|---------------|
| 240MXL1800 | 98.98 | 1.00 |

Nominal Dimension

5.08
 : 1.25 ; 2.30

XL Section

| Belt No. | List Price | Wt.(Approx)kg |
|-----------|------------|---------------|
| 210XL1800 | 106.36 | 1.26 |
| 340XL1800 | 131.95 | 2.04 |
| 352XL1800 | 134.75 | 2.11 |
| 370XL1800 | 138.20 | 2.22 |
| 380XL1800 | 139.39 | 2.28 |
| 390XL1800 | 142.01 | 2.34 |

| Belt No. | List Price | Wt.(Approx)kg |
|-----------|------------|---------------|
| 400XL1800 | 144.35 | 2.40 |
| 450XL1800 | 154.01 | 2.70 |
| 460XL1800 | 155.21 | 2.76 |
| 480XL1800 | 160.25 | 2.88 |
| 490XL1800 | 161.45 | 2.94 |
| 630XL1800 | 189.66 | 3.76 |

Nominal Dimension



L Section

| Belt No. | List Price | Wt.(Approx)kg |
|------------------|------------|---------------|
| 210L1800 | 112.33 | 1.56 |
| 225L1800 | 115.88 | 1.67 |
| 240L1800 | 118.82 | 1.78 |
| 255L1800 | 122.47 | 1.89 |
| 270L1800 | 125.90 | 2.01 |
| 285L1800 | 129.45 | 2.12 |
| 300L1800 | 133.00 | 2.23 |
| 315L1800 | 135.51 | 2.34 |
| 319L1800 | 136.89 | 2.37 |
| 322.5L(322L)1800 | 137.74 | 2.40 |
| 345L1800 | 142.49 | 2.56 |
| 367.5L(367L)1800 | 148.36 | 2.73 |

| Belt No. | List Price | Wt.(Approx)kg |
|------------------|------------|---------------|
| 390L1800 | 152.96 | 2.90 |
| 420L1800 | 159.71 | 3.12 |
| 450L1800 | 166.69 | 3.34 |
| 480L1800 | 173.89 | 3.57 |
| 510L1800 | 180.87 | 3.79 |
| 525L1800 | 183.38 | 3.90 |
| 540L1800 | 186.93 | 4.01 |
| 600L1800 | 200.50 | 4.46 |
| 660L1800 | 214.68 | 4.90 |
| 817.5L(817L)1800 | 249.69 | 6.07 |
| 900L1800 | 269.04 | 6.67 |

Nominal Dimension



H Section

| Belt No. | List Price | Wt.(Approx)kg |
|----------|------------|---------------|
| 230H1800 | 133.11 | 2.16 |
| 240H1800 | 135.84 | 2.25 |
| 270H1800 | 145.24 | 2.54 |
| 300H1800 | 153.68 | 2.82 |
| 320H1800 | 160.46 | 3.01 |
| 330H1800 | 163.08 | 3.10 |
| 340H1800 | 165.69 | 3.19 |
| 350H1800 | 168.30 | 3.29 |
| 360H1800 | 172.48 | 3.38 |
| 370H1800 | 175.21 | 3.47 |
| 375H1800 | 176.21 | 3.52 |
| 390H1800 | 180.92 | 3.66 |
| 400H1800 | 183.53 | 3.76 |
| 410H1800 | 187.13 | 3.85 |
| 420H1800 | 189.83 | 3.94 |
| 450H1800 | 198.27 | 4.23 |
| 480H1800 | 207.68 | 4.51 |
| 490H1800 | 210.29 | 4.60 |

| Belt No. | List Price | Wt.(Approx)kg |
|-----------|------------|---------------|
| 510H1800 | 217.10 | 4.79 |
| 540H1800 | 225.52 | 5.07 |
| 560H1800 | 231.73 | 5.26 |
| 570H1800 | 234.46 | 5.35 |
| 585H1800 | 239.14 | 5.49 |
| 600H1800 | 243.86 | 5.63 |
| 630H1800 | 252.18 | 5.92 |
| 660H1800 | 261.70 | 6.20 |
| 700H1800 | 273.82 | 6.57 |
| 730H1800 | 282.15 | 6.86 |
| 750H1800 | 288.45 | 7.04 |
| 800H1800 | 303.68 | 7.51 |
| 820H1800 | 308.90 | 7.70 |
| 840H1800 | 315.72 | 7.89 |
| 850H1800 | 318.33 | 7.98 |
| 900H1800 | 333.07 | 8.45 |
| 1000H1800 | 362.93 | 9.43 |

Nominal Dimension



S5M Section

| Belt No. | List Price | Wt.(Approx)kg |
|-------------|------------|---------------|
| 4800S5M950 | 156.98 | 2.38 |
| 4800S5M1000 | 161.68 | 2.51 |
| 4800S5M1050 | 165.83 | 2.63 |
| 4800S5M1125 | 172.82 | 2.82 |
| 4800S5M1195 | 180.21 | 2.99 |
| 4800S5M1270 | 187.69 | 3.18 |

| Belt No. | List Price | Wt.(Approx)kg |
|-------------|------------|---------------|
| 4800S5M1420 | 202.14 | 3.56 |
| 4800S5M1595 | 218.35 | 4.00 |
| 4800S5M1790 | 237.89 | 4.48 |
| 4800S5M1800 | 238.26 | 4.51 |
| 4800S5M2000 | 257.89 | 4.99 |

Nominal Dimension




S8M Section

| Belt No. | List Price | Wt.(Approx)kg |
|-------------|------------|---------------|
| 4800S8M520 | 126.10 | 1.93 |
| 4800S8M560 | 130.98 | 2.08 |
| 4800S8M600 | 135.74 | 2.23 |
| 4800S8M632 | 139.27 | 2.35 |
| 4800S8M640 | 139.61 | 2.38 |
| 4800S8M720 | 149.25 | 2.67 |
| 4800S8M800 | 158.86 | 2.97 |
| 4800S8M880 | 168.50 | 3.27 |
| 4800S8M920 | 173.36 | 3.41 |
| 4800S8M960 | 178.12 | 3.56 |
| 4800S8M1040 | 187.76 | 3.86 |
| 4800S8M1120 | 196.39 | 4.16 |

| Belt No. | List Price | Wt.(Approx)kg |
|-------------|------------|---------------|
| 4800S8M1200 | 206.12 | 4.45 |
| 4800S8M1280 | 215.65 | 4.75 |
| 4800S8M1312 | 219.08 | 4.87 |
| 4800S8M1384 | 227.99 | 5.14 |
| 4800S8M1440 | 234.90 | 5.34 |
| 4800S8M1600 | 253.18 | 5.94 |
| 4800S8M1760 | 272.52 | 6.53 |
| 4800S8M1800 | 277.40 | 6.68 |
| 4800S8M2000 | 300.44 | 7.42 |
| 4800S8M2400 | 347.70 | 8.91 |
| 4800S8M2600 | 371.81 | 9.65 |
| 4800S8M2800 | 394.84 | 10.39 |

Nominal Dimension



S14M Section

| Belt No. | List Price | Wt.(Approx)kg |
|--------------|------------|---------------|
| 4800S14M966 | 267.10 | 7.66 |
| 4800S14M1190 | 313.74 | 9.44 |
| 4800S14M1400 | 357.92 | 11.10 |
| 4800S14M1610 | 401.57 | 12.77 |
| 4800S14M1778 | 437.09 | 14.10 |

| Belt No. | List Price | Wt.(Approx)kg |
|--------------|------------|---------------|
| 4800S14M1890 | 460.47 | 14.99 |
| 4800S14M2100 | 504.64 | 16.65 |
| 4800S14M2310 | 548.30 | 18.32 |
| 4800S14M2450 | 578.28 | 19.43 |
| 4800S14M2590 | 607.20 | 20.52 |

Automotive Belt

Raw Edge Belt


V-Ribbed Belt

Timing Belt

Automotive - Raw Edge belt

Made of high strength, flexible tension members and heat-resistant rubber compounds, these automotive belt are designed for high-speed and high-temperature conditions in specially designed shapes.

Raw Edge Cogged Belt



Features

- Highly flexible and thus suitable for conditions requiring high flexibility and a small pulley diameter.
- Assures uniform performance over the entire belt length for the entire belt life.
- Resistant to heat, oil and abrasion.

| Construction | Functions & Materials |
|----------------------|---|
| ① Top fabric | Features flexibility and resistance to heat, oil and abrasion. |
| ② Tension member | Made of highly strong cords with low stretchability, gives high flexibility and length stability. |
| ③ Compression rubber | Made of fiber-reinforced rubber compounds. / Features high durability and smooth running. |
| ④ Base fabric | Made of flexible carcass, it functions to absorb shock and prevent rubber cracks. |

Nominal Dimension




AVX10X Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------------|------------|---------------|--------------------|--------------|------------|---------------|--------------------|
| AVX-10 X 540(mm) | 1.74 | 0.044 | 545 | AVX-10 X 690 | 1.90 | 0.056 | 695 |
| AVX-10 X 550 | 1.75 | 0.045 | 555 | AVX-10 X 695 | 1.91 | 0.057 | 700 |
| AVX-10 X 580 | 1.78 | 0.047 | 585 | AVX-10 X 700 | 1.91 | 0.057 | 705 |
| AVX-10 X 593 | 1.79 | 0.048 | 598 | AVX-10 X 710 | 1.92 | 0.058 | 715 |
| AVX-10 X 600 | 1.80 | 0.049 | 605 | AVX-10 X 715 | 1.93 | 0.058 | 720 |
| AVX-10 X 610 | 1.81 | 0.050 | 615 | AVX-10 X 725 | 1.94 | 0.059 | 730 |
| AVX-10 X 613 | 1.82 | 0.050 | 618 | AVX-10 X 730 | 1.95 | 0.060 | 735 |
| AVX-10 X 617 | 1.82 | 0.050 | 622 | AVX-10 X 735 | 1.95 | 0.060 | 740 |
| AVX-10 X 625 | 1.83 | 0.051 | 630 | AVX-10 X 740 | 1.96 | 0.060 | 745 |
| AVX-10 X 630 | 1.83 | 0.051 | 635 | AVX-10 X 750 | 1.97 | 0.061 | 755 |
| AVX-10 X 635 | 1.84 | 0.052 | 640 | AVX-10 X 757 | 1.98 | 0.062 | 762 |
| AVX-10 X 643 | 1.85 | 0.053 | 648 | AVX-10 X 763 | 1.99 | 0.062 | 768 |
| AVX-10 X 650 | 1.86 | 0.053 | 655 | AVX-10 X 765 | 1.99 | 0.062 | 770 |
| AVX-10 X 660 | 1.87 | 0.054 | 665 | AVX-10 X 770 | 1.99 | 0.063 | 775 |
| AVX-10 X 666 | 1.87 | 0.054 | 671 | AVX-10 X 775 | 2.00 | 0.063 | 780 |
| AVX-10 X 675 | 1.89 | 0.055 | 680 | AVX-10 X 785 | 2.01 | 0.064 | 790 |
| AVX-10 X 680 | 1.89 | 0.056 | 685 | AVX-10 X 788 | 2.02 | 0.064 | 793 |
| AVX-10 X 685 | 1.90 | 0.056 | 690 | AVX-10 X 795 | 2.02 | 0.065 | 800 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|------------|---------------|--------------------|---------------|------------|---------------|--------------------|
| AVX-10 X 800 | 2.03 | 0.065 | 805 | AVX-10 X 1085 | 2.38 | 0.089 | 1090 |
| AVX-10 X 813 | 2.05 | 0.066 | 818 | AVX-10 X 1090 | 2.39 | 0.089 | 1095 |
| AVX-10 X 818 | 2.05 | 0.067 | 823 | AVX-10 X 1100 | 2.40 | 0.090 | 1105 |
| AVX-10 X 825 | 2.06 | 0.067 | 830 | AVX-10 X 1110 | 2.42 | 0.091 | 1115 |
| AVX-10 X 838 | 2.07 | 0.068 | 843 | AVX-10 X 1113 | 2.42 | 0.091 | 1118 |
| AVX-10 X 850 | 2.09 | 0.069 | 855 | AVX-10 X 1125 | 2.43 | 0.092 | 1130 |
| AVX-10 X 858 | 2.10 | 0.070 | 863 | AVX-10 X 1133 | 2.45 | 0.093 | 1138 |
| AVX-10 X 864 | 2.11 | 0.071 | 869 | AVX-10 X 1140 | 2.45 | 0.093 | 1145 |
| AVX-10 X 865 | 2.11 | 0.071 | 870 | AVX-10 X 1150 | 2.47 | 0.094 | 1155 |
| AVX-10 X 875 | 2.12 | 0.071 | 880 | AVX-10 X 1155 | 2.47 | 0.094 | 1160 |
| AVX-10 X 888 | 2.14 | 0.073 | 893 | AVX-10 X 1160 | 2.48 | 0.095 | 1165 |
| AVX-10 X 900 | 2.15 | 0.074 | 905 | AVX-10 X 1165 | 2.49 | 0.095 | 1170 |
| AVX-10 X 905 | 2.16 | 0.074 | 910 | AVX-10 X 1170 | 2.49 | 0.096 | 1175 |
| AVX-10 X 912 | 2.16 | 0.074 | 917 | AVX-10 X 1175 | 2.50 | 0.096 | 1180 |
| AVX-10 X 913 | 2.17 | 0.075 | 918 | AVX-10 X 1184 | 2.51 | 0.097 | 1189 |
| AVX-10 X 918 | 2.17 | 0.075 | 923 | AVX-10 X 1190 | 2.52 | 0.097 | 1195 |
| AVX-10 X 920 | 2.17 | 0.075 | 925 | AVX-10 X 1200 | 2.53 | 0.098 | 1205 |
| AVX-10 X 925 | 2.18 | 0.076 | 930 | AVX-10 X 1215 | 2.55 | 0.099 | 1220 |
| AVX-10 X 930 | 2.19 | 0.076 | 935 | AVX-10 X 1225 | 2.57 | 0.100 | 1230 |
| AVX-10 X 935 | 2.19 | 0.076 | 940 | AVX-10 X 1235 | 2.58 | 0.101 | 1240 |
| AVX-10 X 940 | 2.20 | 0.077 | 945 | AVX-10 X 1238 | 2.59 | 0.101 | 1243 |
| AVX-10 X 950 | 2.21 | 0.078 | 955 | AVX-10 X 1240 | 2.59 | 0.101 | 1245 |
| AVX-10 X 960 | 2.22 | 0.078 | 965 | AVX-10 X 1250 | 2.60 | 0.102 | 1255 |
| AVX-10 X 965 | 2.23 | 0.079 | 970 | AVX-10 X 1270 | 2.63 | 0.104 | 1275 |
| AVX-10 X 970 | 2.24 | 0.079 | 975 | AVX-10 X 1275 | 2.64 | 0.104 | 1280 |
| AVX-10 X 975 | 2.24 | 0.080 | 980 | AVX-10 X 1290 | 2.66 | 0.105 | 1295 |
| AVX-10 X 978 | 2.25 | 0.080 | 983 | AVX-10 X 1300 | 2.67 | 0.106 | 1305 |
| AVX-10 X 980 | 2.25 | 0.080 | 985 | AVX-10 X 1310 | 2.68 | 0.107 | 1315 |
| AVX-10 X 983 | 2.25 | 0.080 | 988 | AVX-10 X 1325 | 2.71 | 0.108 | 1330 |
| AVX-10 X 990 | 2.26 | 0.081 | 995 | AVX-10 X 1340 | 2.73 | 0.109 | 1345 |
| AVX-10 X 995 | 2.27 | 0.081 | 1000 | AVX-10 X 1350 | 2.74 | 0.110 | 1355 |
| AVX-10 X 1000 | 2.27 | 0.082 | 1005 | AVX-10 X 1375 | 2.78 | 0.112 | 1380 |
| AVX-10 X 1005 | 2.28 | 0.082 | 1010 | AVX-10 X 1400 | 2.81 | 0.114 | 1405 |
| AVX-10 X 1007 | 2.28 | 0.082 | 1012 | AVX-10 X 1425 | 2.85 | 0.116 | 1430 |
| AVX-10 X 1013 | 2.29 | 0.083 | 1018 | AVX-10 X 1450 | 2.88 | 0.118 | 1455 |
| AVX-10 X 1025 | 2.31 | 0.084 | 1030 | AVX-10 X 1475 | 2.92 | 0.120 | 1480 |
| AVX-10 X 1035 | 2.32 | 0.085 | 1040 | AVX-10 X 1500 | 2.96 | 0.123 | 1505 |
| AVX-10 X 1037 | 2.32 | 0.085 | 1042 | AVX-10 X 1525 | 2.99 | 0.125 | 1530 |
| AVX-10 X 1050 | 2.34 | 0.086 | 1055 | AVX-10 X 1550 | 3.03 | 0.127 | 1555 |
| AVX-10 X 1050 | 2.34 | 0.086 | 1055 | AVX-10 X 1575 | 3.07 | 0.129 | 1580 |
| AVX-10 X 1060 | 2.35 | 0.087 | 1065 | AVX-10 X 1600 | 3.10 | 0.131 | 1605 |
| AVX-10 X 1065 | 2.36 | 0.087 | 1070 | AVX-10 X 1625 | 3.14 | 0.133 | 1630 |
| AVX-10 X 1070 | 2.36 | 0.087 | 1075 | AVX-10 X 1650 | 3.18 | 0.135 | 1655 |
| AVX-10 X 1075 | 2.37 | 0.088 | 1080 | AVX-10 X 1775 | 3.37 | 0.145 | 1780 |
| AVX-10 X 1080 | 2.38 | 0.088 | 1085 | AVX-10 X 1825 | 3.45 | 0.149 | 1830 |

Nominal Dimension




AVX13X Section

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|------------------|------------|---------------|--------------------|---------------|------------|---------------|--------------------|
| AVX-13 X 600(mm) | 2.30 | 0.065 | 603 | AVX-13 X 910 | 3.03 | 0.099 | 913 |
| AVX-13 X 610 | 2.32 | 0.066 | 613 | AVX-13 X 915 | 3.05 | 0.100 | 918 |
| AVX-13 X 620 | 2.35 | 0.067 | 623 | AVX-13 X 918 | 3.05 | 0.100 | 921 |
| AVX-13 X 625 | 2.36 | 0.068 | 628 | AVX-13 X 920 | 3.06 | 0.101 | 923 |
| AVX-13 X 640 | 2.40 | 0.069 | 643 | AVX-13 X 925 | 3.07 | 0.102 | 928 |
| AVX-13 X 650 | 2.42 | 0.070 | 653 | AVX-13 X 930 | 3.08 | 0.102 | 933 |
| AVX-13 X 655 | 2.43 | 0.071 | 658 | AVX-13 X 938 | 3.10 | 0.102 | 941 |
| AVX-13 X 670 | 2.47 | 0.073 | 673 | AVX-13 X 947 | 3.12 | 0.103 | 950 |
| AVX-13 X 675 | 2.48 | 0.074 | 678 | AVX-13 X 950 | 3.13 | 0.103 | 953 |
| AVX-13 X 680 | 2.49 | 0.074 | 683 | AVX-13 X 955 | 3.14 | 0.103 | 958 |
| AVX-13 X 685 | 2.50 | 0.075 | 688 | AVX-13 X 960 | 3.15 | 0.105 | 963 |
| AVX-13 X 690 | 2.51 | 0.075 | 693 | AVX-13 X 968 | 3.17 | 0.105 | 971 |
| AVX-13 X 700 | 2.54 | 0.076 | 703 | AVX-13 X 975 | 3.19 | 0.106 | 978 |
| AVX-13 X 710 | 2.56 | 0.077 | 713 | AVX-13 X 985 | 3.21 | 0.106 | 988 |
| AVX-13 X 715 | 2.57 | 0.077 | 718 | AVX-13 X 990 | 3.22 | 0.107 | 993 |
| AVX-13 X 725 | 2.60 | 0.078 | 728 | AVX-13 X 992 | 3.22 | 0.107 | 995 |
| AVX-13 X 750 | 2.66 | 0.081 | 753 | AVX-13 X 1000 | 3.24 | 0.108 | 1003 |
| AVX-13 X 765 | 2.69 | 0.083 | 768 | AVX-13 X 1015 | 3.28 | 0.109 | 1018 |
| AVX-13 X 775 | 2.72 | 0.084 | 778 | AVX-13 X 1025 | 3.30 | 0.111 | 1028 |
| AVX-13 X 780 | 2.73 | 0.085 | 783 | AVX-13 X 1030 | 3.31 | 0.111 | 1033 |
| AVX-13 X 784 | 2.74 | 0.086 | 787 | AVX-13 X 1040 | 3.34 | 0.113 | 1043 |
| AVX-13 X 785 | 2.74 | 0.086 | 788 | AVX-13 X 1050 | 3.36 | 0.113 | 1053 |
| AVX-13 X 795 | 2.76 | 0.087 | 798 | AVX-13 X 1055 | 3.37 | 0.114 | 1058 |
| AVX-13 X 800 | 2.78 | 0.087 | 803 | AVX-13 X 1060 | 3.38 | 0.114 | 1063 |
| AVX-13 X 805 | 2.79 | 0.088 | 808 | AVX-13 X 1075 | 3.42 | 0.116 | 1078 |
| AVX-13 X 810 | 2.80 | 0.088 | 813 | AVX-13 X 1085 | 3.44 | 0.118 | 1088 |
| AVX-13 X 818 | 2.82 | 0.090 | 821 | AVX-13 X 1100 | 3.48 | 0.119 | 1103 |
| AVX-13 X 825 | 2.83 | 0.090 | 828 | AVX-13 X 1110 | 3.50 | 0.120 | 1113 |
| AVX-13 X 830 | 2.85 | 0.090 | 833 | AVX-13 X 1118 | 3.52 | 0.121 | 1121 |
| AVX-13 X 835 | 2.86 | 0.090 | 838 | AVX-13 X 1120 | 3.52 | 0.121 | 1123 |
| AVX-13 X 840 | 2.87 | 0.091 | 843 | AVX-13 X 1125 | 3.53 | 0.121 | 1128 |
| AVX-13 X 850 | 2.89 | 0.092 | 853 | AVX-13 X 1138 | 3.56 | 0.123 | 1141 |
| AVX-13 X 855 | 2.90 | 0.093 | 858 | AVX-13 X 1145 | 3.58 | 0.124 | 1148 |
| AVX-13 X 860 | 2.92 | 0.093 | 863 | AVX-13 X 1150 | 3.59 | 0.124 | 1153 |
| AVX-13 X 865 | 2.93 | 0.095 | 868 | AVX-13 X 1155 | 3.60 | 0.125 | 1158 |
| AVX-13 X 868 | 2.93 | 0.095 | 871 | AVX-13 X 1160 | 3.61 | 0.126 | 1163 |
| AVX-13 X 875 | 2.95 | 0.096 | 878 | AVX-13 X 1165 | 3.62 | 0.126 | 1168 |
| AVX-13 X 885 | 2.97 | 0.096 | 888 | AVX-13 X 1175 | 3.65 | 0.127 | 1178 |
| AVX-13 X 890 | 2.99 | 0.097 | 893 | AVX-13 X 1184 | 3.67 | 0.128 | 1187 |
| AVX-13 X 900 | 3.01 | 0.098 | 903 | AVX-13 X 1188 | 3.68 | 0.128 | 1191 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|---------------|------------|---------------|--------------------|---------------|------------|---------------|--------------------|
| AVX-13 X 1200 | 3.71 | 0.129 | 1203 | AVX-13 X 1575 | 4.55 | 0.170 | 1578 |
| AVX-13 X 1225 | 3.76 | 0.132 | 1228 | AVX-13 X 1600 | 4.61 | 0.173 | 1603 |
| AVX-13 X 1235 | 3.79 | 0.133 | 1238 | AVX-13 X 1625 | 4.67 | 0.175 | 1628 |
| AVX-13 X 1250 | 3.82 | 0.135 | 1253 | AVX-13 X 1650 | 4.72 | 0.178 | 1653 |
| AVX-13 X 1260 | 3.84 | 0.136 | 1263 | AVX-13 X 1675 | 4.78 | 0.181 | 1678 |
| AVX-13 X 1275 | 3.88 | 0.138 | 1278 | AVX-13 X 1693 | 4.82 | 0.183 | 1696 |
| AVX-13 X 1285 | 3.90 | 0.139 | 1288 | AVX-13 X 1700 | 4.83 | 0.183 | 1703 |
| AVX-13 X 1290 | 3.91 | 0.139 | 1293 | AVX-13 X 1718 | 4.87 | 0.185 | 1721 |
| AVX-13 X 1300 | 3.93 | 0.140 | 1303 | AVX-13 X 1725 | 4.89 | 0.186 | 1728 |
| AVX-13 X 1325 | 3.99 | 0.143 | 1328 | AVX-13 X 1750 | 4.94 | 0.189 | 1753 |
| AVX-13 X 1338 | 4.02 | 0.144 | 1341 | AVX-13 X 1775 | 5.00 | 0.191 | 1778 |
| AVX-13 X 1350 | 4.05 | 0.146 | 1353 | AVX-13 X 1800 | 5.05 | 0.194 | 1803 |
| AVX-13 X 1375 | 4.10 | 0.148 | 1378 | AVX-13 X 1825 | 5.11 | 0.197 | 1828 |
| AVX-13 X 1385 | 4.13 | 0.149 | 1388 | AVX-13 X 1850 | 5.16 | 0.200 | 1853 |
| AVX-13 X 1400 | 4.16 | 0.151 | 1403 | AVX-13 X 1863 | 5.19 | 0.201 | 1866 |
| AVX-13 X 1410 | 4.18 | 0.152 | 1413 | AVX-13 X 1875 | 5.22 | 0.202 | 1878 |
| AVX-13 X 1425 | 4.22 | 0.154 | 1428 | AVX-13 X 1900 | 5.27 | 0.205 | 1903 |
| AVX-13 X 1443 | 4.26 | 0.156 | 1446 | AVX-13 X 1925 | 5.33 | 0.208 | 1928 |
| AVX-13 X 1450 | 4.27 | 0.156 | 1453 | AVX-13 X 1950 | 5.38 | 0.210 | 1953 |
| AVX-13 X 1460 | 4.30 | 0.157 | 1463 | AVX-13 X 1975 | 5.43 | 0.213 | 1978 |
| AVX-13 X 1475 | 4.33 | 0.159 | 1478 | AVX-13 X 2000 | 5.49 | 0.216 | 2003 |
| AVX-13 X 1485 | 4.35 | 0.160 | 1488 | AVX-13 X 2075 | 5.65 | 0.224 | 2078 |
| AVX-13 X 1500 | 4.39 | 0.162 | 1503 | AVX-13 X 2100 | 5.70 | 0.227 | 2103 |
| AVX-13 X 1518 | 4.43 | 0.164 | 1521 | AVX-13 X 2125 | 5.76 | 0.229 | 2128 |
| AVX-13 X 1525 | 4.44 | 0.164 | 1528 | AVX-13 X 2200 | 5.92 | 0.237 | 2203 |
| AVX-13 X 1535 | 4.46 | 0.166 | 1538 | AVX-13 X 2400 | 6.34 | 0.259 | 2403 |
| AVX-13 X 1550 | 4.50 | 0.167 | 1553 | AVX-13 X 2450 | 6.45 | 0.264 | 2453 |

Automotive - Raw Edge belt


Raw Edge Laminated Belt



Features

- Noise reduction
- Prevents slippage
- Resistant to shock
- Resistant to heat, oil and abrasion

| Construction | Functions & Materials |
|----------------------|---|
| ① Top fabric | Features flexibility and resistance to heat, oil and abrasion. |
| ② Tension member | Made of highly strong cords with low stretchability. Gives high flexibility and length stability. |
| ③ Compression rubber | Made of fiber-reinforced rubber compounds. Features high durability and smooth running. |
| ④ Base fabric | Multi-layered carcass, excellent for noise absorption and quiet running. |




Type and Dimension

| Type | Width(mm) | Height(mm) | Angle(°) | Type | Width(mm) | Height(mm) | Angle(°) |
|------|-----------|------------|----------|------|-----------|------------|----------|
| HM | 10.7 | 7.5 | 38 | B | 17.0 | 9.5 | 38 |
| A | 13.0 | 8.0 | 38 | | | | |

Automotive - Raw Edge belt


Raw Edge Plain Belt



Features

- Prevents slippage
- Resistant to heat, oil and abrasion

| Construction | Functions & Materials |
|----------------------|--|
| ① Top fabric | Features flexibility and resistance to heat, oil and abrasion. |
| ② Tension member | Gives high flexibility and length stability. |
| ③ Compression rubber | Features high durability and smooth running. |




Type and Dimension

| Type | Width(mm) | Height(mm) | Angle(°) | Type | Width(mm) | Height(mm) | Angle(°) |
|------|-----------|------------|----------|------|-----------|------------|----------|
| HM | 10.7 | 7.5 | 38 | B | 17.0 | 9.5 | 38 |
| A | 13.0 | 8.0 | 38 | | | | |

Automotive - V-Ribbed Belt


High flexibility due to unique belt cross section allows long service life and compact drives for DRB V-ribbed belt. V-ribbed belt, also known as the "Poly V-Belt" are suitable for high speed drives and high power transmission drives.



Features

- Designed for excellent flexibility, meets the requirements of small pulley diameters and reverse bending.
- High power transmission efficiency
- Reduced noise
- Smooth running

| Construction | Functions & Materials |
|-------------------|---|
| ① Top fabric | Resistant to heat, oil, wear and crack. |
| ② Tension member | The specially heat-treated cords provide high modulus and shock load resistance. |
| ③ Rubber adhesive | Maintains cohesion of the cords and rib rubber as well as protecting cords. |
| ④ Rubber ribs | Fiber-reinforced rib rubber offers support for the cords and excellent wear resistance. |



Type and Dimension

| Type | P(mm) | $\theta(^{\circ})$ | H(mm) | h(mm) |
|------|-------|--------------------|-------|-------|
| PK | 3.56 | 40 | 4.3 | 2.0 |

3PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-------------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 3PK 560(mm) | 1.98 | 0.029 | 560 | 3PK 790 | 2.19 | 0.041 | 790 |
| 3PK 590 | 2.01 | 0.031 | 590 | 3PK 800 | 2.20 | 0.041 | 800 |
| 3PK 600 | 2.01 | 0.031 | 600 | 3PK 815 | 2.22 | 0.042 | 815 |
| 3PK 630 | 2.04 | 0.033 | 630 | 3PK 820 | 2.22 | 0.042 | 820 |
| 3PK 665 | 2.07 | 0.035 | 665 | 3PK 825 | 2.23 | 0.043 | 825 |
| 3PK 670 | 2.08 | 0.035 | 670 | 3PK 830 | 2.23 | 0.043 | 830 |
| 3PK 675 | 2.08 | 0.035 | 675 | 3PK 850 | 2.25 | 0.044 | 850 |
| 3PK 690 | 2.10 | 0.036 | 690 | 3PK 875 | 2.28 | 0.045 | 875 |
| 3PK 715 | 2.12 | 0.037 | 715 | 3PK 880 | 2.28 | 0.046 | 880 |
| 3PK 735 | 2.14 | 0.038 | 735 | 3PK 890 | 2.29 | 0.046 | 890 |
| 3PK 750 | 2.15 | 0.039 | 750 | 3PK 905 | 2.31 | 0.047 | 905 |
| 3PK 760 | 2.16 | 0.039 | 760 | 3PK 910 | 2.31 | 0.047 | 910 |
| 3PK 765 | 2.17 | 0.040 | 765 | 3PK 915 | 2.32 | 0.047 | 915 |
| 3PK 780 | 2.18 | 0.040 | 780 | 3PK 925 | 2.33 | 0.048 | 925 |
| 3PK 785 | 2.19 | 0.041 | 785 | 3PK 935 | 2.34 | 0.048 | 935 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 3PK 960 | 2.37 | 0.050 | 960 | 3PK 1025 | 2.44 | 0.053 | 1025 |
| 3PK 975 | 2.38 | 0.050 | 975 | 3PK 1050 | 2.47 | 0.054 | 1050 |
| 3PK 995 | 2.41 | 0.052 | 995 | 3PK 1080 | 2.50 | 0.056 | 1080 |
| 3PK 1000 | 2.41 | 0.052 | 1000 | 3PK 1150 | 2.59 | 0.060 | 1150 |
| 3PK 1015 | 2.43 | 0.053 | 1015 | 3PK 1220 | 2.67 | 0.063 | 1220 |
| 3PK 1020 | 2.43 | 0.053 | 1020 | 3PK 1285 | 2.76 | 0.067 | 1285 |

4PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-------------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 4PK 545(mm) | 2.80 | 0.038 | 545 | 4PK 850 | 3.23 | 0.059 | 850 |
| 4PK 560 | 2.82 | 0.039 | 560 | 4PK 855 | 3.24 | 0.059 | 855 |
| 4PK 590 | 2.86 | 0.041 | 590 | 4PK 865 | 3.26 | 0.060 | 865 |
| 4PK 605 | 2.88 | 0.042 | 605 | 4PK 870 | 3.26 | 0.060 | 870 |
| 4PK 613 | 2.89 | 0.043 | 613 | 4PK 875 | 3.27 | 0.060 | 875 |
| 4PK 635 | 2.92 | 0.044 | 635 | 4PK 885 | 3.29 | 0.061 | 885 |
| 4PK 640 | 2.93 | 0.044 | 640 | 4PK 890 | 3.29 | 0.061 | 890 |
| 4PK 650 | 2.94 | 0.045 | 650 | 4PK 897 | 3.31 | 0.062 | 897 |
| 4PK 665 | 2.96 | 0.046 | 665 | 4PK 900 | 3.31 | 0.062 | 900 |
| 4PK 675 | 2.98 | 0.047 | 675 | 4PK 905 | 3.32 | 0.062 | 905 |
| 4PK 685 | 2.99 | 0.047 | 685 | 4PK 910 | 3.33 | 0.063 | 910 |
| 4PK 700 | 3.01 | 0.048 | 700 | 4PK 915 | 3.33 | 0.063 | 915 |
| 4PK 715 | 3.03 | 0.049 | 715 | 4PK 920 | 3.34 | 0.064 | 920 |
| 4PK 718 | 3.04 | 0.050 | 718 | 4PK 925 | 3.35 | 0.064 | 925 |
| 4PK 725 | 3.05 | 0.050 | 725 | 4PK 930 | 3.36 | 0.065 | 930 |
| 4PK 755 | 3.09 | 0.052 | 755 | 4PK 935 | 3.36 | 0.065 | 935 |
| 4PK 760 | 3.10 | 0.052 | 760 | 4PK 940 | 3.37 | 0.065 | 940 |
| 4PK 770 | 3.11 | 0.053 | 770 | 4PK 945 | 3.38 | 0.065 | 945 |
| 4PK 775 | 3.12 | 0.054 | 775 | 4PK 950 | 3.39 | 0.066 | 950 |
| 4PK 778 | 3.13 | 0.054 | 778 | 4PK 960 | 3.40 | 0.067 | 960 |
| 4PK 785 | 3.14 | 0.054 | 785 | 4PK 965 | 3.41 | 0.067 | 965 |
| 4PK 790 | 3.14 | 0.055 | 790 | 4PK 967 | 3.42 | 0.067 | 967 |
| 4PK 800 | 3.16 | 0.055 | 800 | 4PK 970 | 3.42 | 0.067 | 970 |
| 4PK 809 | 3.17 | 0.056 | 809 | 4PK 975 | 3.43 | 0.067 | 975 |
| 4PK 810 | 3.17 | 0.056 | 810 | 4PK 980 | 3.44 | 0.068 | 980 |
| 4PK 812 | 3.18 | 0.056 | 812 | 4PK 985 | 3.44 | 0.068 | 985 |
| 4PK 815 | 3.18 | 0.056 | 815 | 4PK 990 | 3.45 | 0.068 | 990 |
| 4PK 825 | 3.20 | 0.057 | 825 | 4PK 995 | 3.46 | 0.069 | 995 |
| 4PK 829 | 3.20 | 0.057 | 829 | 4PK 1000 | 3.47 | 0.069 | 1000 |
| 4PK 830 | 3.20 | 0.057 | 830 | 4PK 1015 | 3.49 | 0.070 | 1015 |
| 4PK 845 | 3.23 | 0.058 | 845 | 4PK 1020 | 3.50 | 0.070 | 1020 |
| 4PK 848 | 3.23 | 0.059 | 848 | 4PK 1045 | 3.54 | 0.072 | 1045 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 4PK 1060 | 3.57 | 0.073 | 1060 | 4PK 1190 | 3.79 | 0.082 | 1190 |
| 4PK 1075 | 3.59 | 0.074 | 1075 | 4PK 1230 | 3.86 | 0.085 | 1230 |
| 4PK 1080 | 3.60 | 0.075 | 1080 | 4PK 1245 | 3.88 | 0.086 | 1245 |
| 4PK 1082 | 3.60 | 0.075 | 1082 | 4PK 1325 | 4.03 | 0.091 | 1325 |
| 4PK 1090 | 3.62 | 0.075 | 1090 | 4PK 1360 | 4.09 | 0.094 | 1360 |
| 4PK 1100 | 3.63 | 0.076 | 1100 | 4PK 1450 | 4.26 | 0.100 | 1450 |
| 4PK 1105 | 3.64 | 0.076 | 1105 | 4PK 1460 | 4.28 | 0.101 | 1460 |
| 4PK 1115 | 3.66 | 0.077 | 1115 | 4PK 1485 | 4.33 | 0.103 | 1485 |
| 4PK 1125 | 3.68 | 0.078 | 1125 | 4PK 1520 | 4.40 | 0.105 | 1520 |
| 4PK 1165 | 3.74 | 0.080 | 1165 | | | | |

5PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-------------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 5PK 575(mm) | 3.18 | 0.050 | 575 | 5PK 970 | 3.98 | 0.084 | 970 |
| 5PK 675 | 3.37 | 0.058 | 675 | 5PK 975 | 3.99 | 0.084 | 975 |
| 5PK 710 | 3.44 | 0.061 | 710 | 5PK 980 | 4.01 | 0.085 | 980 |
| 5PK 715 | 3.45 | 0.062 | 715 | 5PK 985 | 4.02 | 0.085 | 985 |
| 5PK 725 | 3.47 | 0.063 | 725 | 5PK 990 | 4.03 | 0.085 | 990 |
| 5PK 775 | 3.57 | 0.067 | 775 | 5PK 1000 | 4.05 | 0.086 | 1000 |
| 5PK 785 | 3.59 | 0.068 | 785 | 5PK 1005 | 4.06 | 0.087 | 1005 |
| 5PK 790 | 3.60 | 0.068 | 790 | 5PK 1008 | 4.07 | 0.087 | 1008 |
| 5PK 800 | 3.62 | 0.069 | 800 | 5PK 1010 | 4.07 | 0.087 | 1010 |
| 5PK 820 | 3.67 | 0.071 | 820 | 5PK 1015 | 4.08 | 0.088 | 1015 |
| 5PK 825 | 3.68 | 0.071 | 825 | 5PK 1025 | 4.10 | 0.088 | 1025 |
| 5PK 830 | 3.69 | 0.072 | 830 | 5PK 1030 | 4.12 | 0.089 | 1030 |
| 5PK 850 | 3.73 | 0.073 | 850 | 5PK 1040 | 4.14 | 0.090 | 1040 |
| 5PK 865 | 3.76 | 0.075 | 865 | 5PK 1045 | 4.15 | 0.090 | 1045 |
| 5PK 870 | 3.77 | 0.076 | 870 | 5PK 1050 | 4.16 | 0.090 | 1050 |
| 5PK 875 | 3.78 | 0.076 | 875 | 5PK 1060 | 4.18 | 0.091 | 1060 |
| 5PK 890 | 3.81 | 0.077 | 890 | 5PK 1070 | 4.21 | 0.092 | 1070 |
| 5PK 900 | 3.83 | 0.078 | 900 | 5PK 1075 | 4.22 | 0.092 | 1075 |
| 5PK 905 | 3.84 | 0.078 | 905 | 5PK 1090 | 4.25 | 0.094 | 1090 |
| 5PK 906 | 3.85 | 0.078 | 906 | 5PK 1100 | 4.27 | 0.095 | 1100 |
| 5PK 915 | 3.87 | 0.079 | 915 | 5PK 1105 | 4.28 | 0.095 | 1105 |
| 5PK 920 | 3.88 | 0.079 | 920 | 5PK 1110 | 4.30 | 0.096 | 1110 |
| 5PK 925 | 3.89 | 0.080 | 925 | 5PK 1120 | 4.32 | 0.097 | 1120 |
| 5PK 930 | 3.90 | 0.080 | 930 | 5PK 1125 | 4.33 | 0.097 | 1125 |
| 5PK 940 | 3.92 | 0.081 | 940 | 5PK 1135 | 4.35 | 0.098 | 1135 |
| 5PK 950 | 3.94 | 0.082 | 950 | 5PK 1140 | 4.36 | 0.098 | 1140 |
| 5PK 955 | 3.95 | 0.082 | 955 | 5PK 1155 | 4.40 | 0.100 | 1155 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 5PK 1165 | 4.42 | 0.101 | 1165 | 5PK 1385 | 4.95 | 0.120 | 1385 |
| 5PK 1180 | 4.46 | 0.102 | 1180 | 5PK 1390 | 4.96 | 0.120 | 1390 |
| 5PK 1190 | 4.48 | 0.103 | 1190 | 5PK 1393 | 4.97 | 0.120 | 1393 |
| 5PK 1200 | 4.50 | 0.104 | 1200 | 5PK 1450 | 5.11 | 0.125 | 1450 |
| 5PK 1210 | 4.53 | 0.104 | 1210 | 5PK 1465 | 5.15 | 0.126 | 1465 |
| 5PK 1225 | 4.56 | 0.106 | 1225 | 5PK 1500 | 5.24 | 0.129 | 1500 |
| 5PK 1230 | 4.57 | 0.106 | 1230 | 5PK 1515 | 5.28 | 0.131 | 1515 |
| 5PK 1240 | 4.60 | 0.107 | 1240 | 5PK 1530 | 5.31 | 0.132 | 1530 |
| 5PK 1250 | 4.62 | 0.108 | 1250 | 5PK 1585 | 5.46 | 0.137 | 1585 |
| 5PK 1255 | 4.63 | 0.108 | 1255 | 5PK 1592 | 5.48 | 0.138 | 1592 |
| 5PK 1260 | 4.64 | 0.109 | 1260 | 5PK 1610 | 5.52 | 0.139 | 1610 |
| 5PK 1270 | 4.67 | 0.110 | 1270 | 5PK 1635 | 5.59 | 0.141 | 1635 |
| 5PK 1275 | 4.68 | 0.110 | 1275 | 5PK 1680 | 5.71 | 0.145 | 1680 |
| 5PK 1285 | 4.70 | 0.111 | 1285 | 5PK 1720 | 5.82 | 0.148 | 1720 |
| 5PK 1290 | 4.72 | 0.111 | 1290 | 5PK 1750 | 5.90 | 0.151 | 1750 |
| 5PK 1295 | 4.73 | 0.112 | 1295 | 5PK 1815 | 6.08 | 0.157 | 1815 |
| 5PK 1300 | 4.74 | 0.112 | 1300 | 5PK 1850 | 6.18 | 0.160 | 1850 |
| 5PK 1325 | 4.80 | 0.114 | 1325 | 5PK 1885 | 6.27 | 0.163 | 1885 |
| 5PK 1330 | 4.81 | 0.115 | 1330 | 5PK 2020 | 6.66 | 0.174 | 2020 |
| 5PK 1345 | 4.85 | 0.116 | 1345 | 5PK 2030 | 6.69 | 0.175 | 2030 |
| 5PK 1350 | 4.86 | 0.117 | 1350 | 5PK 2060 | 6.78 | 0.178 | 2060 |
| 5PK 1360 | 4.89 | 0.117 | 1360 | | | | |

6PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-------------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 6PK 675(mm) | 4.15 | 0.070 | 675 | 6PK 995 | 4.97 | 0.103 | 995 |
| 6PK 720 | 4.26 | 0.075 | 720 | 6PK 1000 | 4.98 | 0.104 | 1000 |
| 6PK 725 | 4.27 | 0.075 | 725 | 6PK 1010 | 5.01 | 0.105 | 1010 |
| 6PK 745 | 4.32 | 0.077 | 745 | 6PK 1015 | 5.02 | 0.105 | 1015 |
| 6PK 780 | 4.41 | 0.081 | 780 | 6PK 1020 | 5.03 | 0.106 | 1020 |
| 6PK 800 | 4.46 | 0.083 | 800 | 6PK 1025 | 5.05 | 0.106 | 1025 |
| 6PK 820 | 4.51 | 0.085 | 820 | 6PK 1030 | 5.06 | 0.107 | 1030 |
| 6PK 850 | 4.59 | 0.088 | 850 | 6PK 1045 | 5.10 | 0.108 | 1045 |
| 6PK 875 | 4.65 | 0.091 | 875 | 6PK 1050 | 5.11 | 0.109 | 1050 |
| 6PK 880 | 4.67 | 0.091 | 880 | 6PK 1060 | 5.14 | 0.110 | 1060 |
| 6PK 890 | 4.69 | 0.092 | 890 | 6PK 1065 | 5.15 | 0.110 | 1065 |
| 6PK 900 | 4.72 | 0.093 | 900 | 6PK 1070 | 5.17 | 0.111 | 1070 |
| 6PK 915 | 4.76 | 0.095 | 915 | 6PK 1075 | 5.18 | 0.111 | 1075 |
| 6PK 935 | 4.81 | 0.097 | 935 | 6PK 1080 | 5.20 | 0.112 | 1080 |
| 6PK 950 | 4.85 | 0.098 | 950 | 6PK 1090 | 5.22 | 0.113 | 1090 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) | Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|----------|------------|---------------|-----------|
| 6PK 1095 | 5.24 | 0.011 | 1095 | 6PK 1965 | 7.85 | 0.204 | 1965 |
| 6PK 1100 | 5.25 | 0.114 | 1100 | 6PK 1980 | 7.90 | 0.205 | 1980 |
| 6PK 1105 | 5.26 | 0.114 | 1105 | 6PK 2000 | 7.96 | 0.207 | 2000 |
| 6PK 1110 | 5.28 | 0.115 | 1110 | 6PK 2005 | 7.98 | 0.207 | 2005 |
| 6PK 1120 | 5.30 | 0.116 | 1120 | 6PK 2015 | 8.01 | 0.208 | 2015 |
| 6PK 1125 | 5.32 | 0.117 | 1125 | 6PK 2020 | 8.03 | 0.209 | 2020 |
| 6PK 1130 | 5.33 | 0.117 | 1130 | 6PK 2030 | 8.06 | 0.210 | 2030 |
| 6PK 1145 | 5.37 | 0.119 | 1145 | 6PK 2040 | 8.10 | 0.211 | 2040 |
| 6PK 1150 | 5.39 | 0.120 | 1150 | 6PK 2044 | 8.11 | 0.211 | 2044 |
| 6PK 1165 | 5.43 | 0.121 | 1165 | 6PK 2050 | 8.13 | 0.212 | 2050 |
| 6PK 1180 | 5.47 | 0.122 | 1180 | 6PK 2055 | 8.15 | 0.213 | 2055 |
| 6PK 1185 | 5.48 | 0.123 | 1185 | 6PK 2060 | 8.16 | 0.213 | 2060 |
| 6PK 1190 | 5.50 | 0.123 | 1190 | 6PK 2080 | 8.23 | 0.215 | 2080 |
| 6PK 1195 | 5.51 | 0.124 | 1195 | 6PK 2100 | 8.30 | 0.218 | 2100 |
| 6PK 1200 | 5.53 | 0.124 | 1200 | 6PK 2115 | 8.35 | 0.219 | 2115 |
| 6PK 1225 | 5.60 | 0.127 | 1225 | 6PK 2120 | 8.37 | 0.220 | 2120 |
| 6PK 1230 | 5.61 | 0.127 | 1230 | 6PK 2125 | 8.38 | 0.220 | 2125 |
| 6PK 1240 | 5.64 | 0.128 | 1240 | 6PK 2130 | 8.40 | 0.221 | 2130 |
| 6PK 1250 | 5.67 | 0.129 | 1250 | 6PK 2140 | 8.43 | 0.222 | 2140 |
| 6PK 1260 | 5.69 | 0.130 | 1260 | 6PK 2145 | 8.45 | 0.222 | 2145 |
| 6PK 1275 | 5.74 | 0.132 | 1275 | 6PK 2150 | 8.47 | 0.223 | 2150 |
| 6PK 1285 | 5.77 | 0.133 | 1285 | 6PK 2155 | 8.48 | 0.223 | 2155 |
| 6PK 1300 | 5.81 | 0.135 | 1300 | 6PK 2160 | 8.50 | 0.224 | 2160 |
| 6PK 1325 | 5.88 | 0.137 | 1325 | 6PK 2170 | 8.53 | 0.225 | 2170 |
| 6PK 1345 | 5.94 | 0.139 | 1345 | 6PK 2190 | 8.60 | 0.227 | 2190 |
| 6PK 1360 | 5.98 | 0.141 | 1360 | 6PK 2205 | 8.65 | 0.228 | 2205 |
| 6PK 1370 | 6.01 | 0.142 | 1370 | 6PK 2215 | 8.69 | 0.229 | 2215 |
| 6PK 1390 | 6.07 | 0.144 | 1390 | 6PK 2225 | 8.72 | 0.230 | 2225 |
| 6PK 1400 | 6.10 | 0.145 | 1400 | 6PK 2240 | 8.78 | 0.232 | 2240 |
| 6PK 1420 | 6.16 | 0.147 | 1420 | 6PK 2245 | 8.79 | 0.233 | 2245 |
| 6PK 1440 | 6.21 | 0.149 | 1440 | 6PK 2260 | 8.84 | 0.234 | 2260 |
| 6PK 1450 | 6.24 | 0.150 | 1450 | 6PK 2270 | 8.88 | 0.235 | 2270 |
| 6PK 1460 | 6.27 | 0.151 | 1460 | 6PK 2280 | 8.91 | 0.236 | 2280 |
| 6PK 1470 | 6.30 | 0.152 | 1470 | 6PK 2300 | 8.98 | 0.238 | 2300 |
| 6PK 1698 | 7.00 | 0.176 | 1698 | 6PK 2315 | 9.04 | 0.240 | 2315 |
| 6PK 1870 | 7.54 | 0.194 | 1870 | 6PK 2330 | 9.09 | 0.241 | 2330 |
| 6PK 1875 | 7.56 | 0.195 | 1875 | 6PK 2345 | 9.14 | 0.243 | 2345 |
| 6PK 1880 | 7.57 | 0.195 | 1880 | 6PK 2355 | 9.18 | 0.244 | 2355 |
| 6PK 1885 | 7.59 | 0.195 | 1885 | 6PK 2390 | 9.30 | 0.248 | 2390 |
| 6PK 1892 | 7.61 | 0.196 | 1892 | 6PK 2415 | 9.39 | 0.250 | 2415 |
| 6PK 1900 | 7.64 | 0.197 | 1900 | 6PK 2445 | 9.50 | 0.253 | 2445 |
| 6PK 1905 | 7.65 | 0.197 | 1905 | 6PK 2460 | 9.55 | 0.255 | 2460 |
| 6PK 1920 | 7.70 | 0.199 | 1920 | 6PK 2465 | 9.57 | 0.255 | 2465 |
| 6PK 1930 | 7.73 | 0.200 | 1930 | 6PK 2475 | 9.61 | 0.256 | 2475 |
| 6PK 1950 | 7.80 | 0.202 | 1950 | 6PK 2495 | 9.68 | 0.258 | 2495 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|
| 6PK 2510 | 9.73 | 0.260 | 2510 |
| 6PK 2535 | 9.82 | 0.263 | 2535 |
| 6PK 2584 | 10.00 | 0.268 | 2584 |
| 6PK 2585 | 10.01 | 0.268 | 2585 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|
| 6PK 2615 | 10.12 | 0.271 | 2615 |
| 6PK 2625 | 10.15 | 0.272 | 2625 |
| 6PK 2680 | 10.36 | 0.278 | 2680 |

7PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-------------|------------|---------------|-----------|
| 7PK 870(mm) | 5.47 | 0.105 | 870 |
| 7PK 920 | 5.60 | 0.111 | 920 |
| 7PK 1035 | 5.91 | 0.125 | 1035 |
| 7PK 1090 | 6.06 | 0.132 | 1090 |
| 7PK 1145 | 6.22 | 0.138 | 1145 |
| 7PK 1175 | 6.31 | 0.142 | 1175 |
| 7PK 1220 | 6.44 | 0.147 | 1220 |
| 7PK 1240 | 6.49 | 0.150 | 1240 |
| 7PK 1290 | 6.64 | 0.156 | 1290 |
| 7PK 1350 | 6.82 | 0.163 | 1350 |
| 7PK 1400 | 6.97 | 0.169 | 1400 |
| 7PK 1440 | 7.10 | 0.174 | 1440 |
| 7PK 1555 | 7.46 | 0.188 | 1555 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|
| 7PK 1570 | 7.50 | 0.190 | 1570 |
| 7PK 1580 | 7.54 | 0.191 | 1580 |
| 7PK 1605 | 7.62 | 0.194 | 1605 |
| 7PK 1635 | 7.71 | 0.198 | 1635 |
| 7PK 1675 | 7.84 | 0.202 | 1675 |
| 7PK 1715 | 7.97 | 0.207 | 1715 |
| 7PK 1730 | 8.02 | 0.209 | 1730 |
| 7PK 1950 | 8.77 | 0.236 | 1950 |
| 7PK 1980 | 8.88 | 0.239 | 1980 |
| 7PK 2050 | 9.13 | 0.248 | 2050 |
| 7PK 2060 | 9.16 | 0.249 | 2060 |
| 7PK 2284 | 9.98 | 0.276 | 2284 |
| 7PK 2355 | 10.25 | 0.285 | 2355 |

8PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-------------|------------|---------------|-----------|
| 8PK 800(mm) | 5.93 | 0.110 | 800 |
| 8PK 900 | 6.23 | 0.124 | 900 |
| 8PK 915 | 6.28 | 0.126 | 915 |
| 8PK 975 | 6.46 | 0.135 | 975 |
| 8PK 1005 | 6.55 | 0.139 | 1005 |
| 8PK 1015 | 6.58 | 0.140 | 1015 |
| 8PK 1020 | 6.60 | 0.141 | 1020 |
| 8PK 1025 | 6.62 | 0.142 | 1025 |
| 8PK 1035 | 6.65 | 0.143 | 1035 |
| 8PK 1055 | 6.71 | 0.146 | 1055 |
| 8PK 1075 | 6.77 | 0.148 | 1075 |
| 8PK 1100 | 6.85 | 0.152 | 1100 |
| 8PK 1115 | 6.90 | 0.154 | 1115 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|
| 8PK 1175 | 7.10 | 0.162 | 1175 |
| 8PK 1180 | 7.11 | 0.163 | 1180 |
| 8PK 1230 | 7.28 | 0.170 | 1230 |
| 8PK 1255 | 7.36 | 0.173 | 1255 |
| 8PK 1400 | 7.85 | 0.193 | 1400 |
| 8PK 1420 | 7.92 | 0.196 | 1420 |
| 8PK 1435 | 7.97 | 0.198 | 1435 |
| 8PK 1460 | 8.06 | 0.202 | 1460 |
| 8PK 1475 | 8.11 | 0.204 | 1475 |
| 8PK 1480 | 8.13 | 0.204 | 1480 |
| 8PK 1500 | 8.20 | 0.207 | 1500 |
| 8PK 1560 | 8.41 | 0.215 | 1560 |
| 8PK 1580 | 8.48 | 0.218 | 1580 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|
| 8PK 1600 | 8.55 | 0.221 | 1600 |
| 8PK 1625 | 8.64 | 0.224 | 1625 |
| 8PK 1635 | 8.68 | 0.226 | 1635 |
| 8PK 1825 | 9.38 | 0.252 | 1825 |
| 8PK 1840 | 9.44 | 0.254 | 1840 |
| 8PK 1980 | 9.97 | 0.273 | 1980 |
| 8PK 2040 | 10.21 | 0.282 | 2040 |
| 8PK 2050 | 10.25 | 0.283 | 2050 |
| 8PK 2085 | 10.39 | 0.288 | 2085 |
| 8PK 2100 | 10.45 | 0.290 | 2100 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|----------|------------|---------------|-----------|
| 8PK 2130 | 10.57 | 0.294 | 2130 |
| 8PK 2140 | 10.61 | 0.296 | 2140 |
| 8PK 2215 | 10.91 | 0.306 | 2215 |
| 8PK 2380 | 11.60 | 0.329 | 2380 |
| 8PK 2440 | 11.85 | 0.337 | 2440 |
| 8PK 2460 | 11.94 | 0.340 | 2460 |
| 8PK 2465 | 11.96 | 0.340 | 2465 |
| 8PK 2550 | 12.33 | 0.352 | 2550 |
| 8PK 2585 | 12.48 | 0.357 | 2585 |


9~12PK Section

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|--------------|------------|---------------|-----------|
| 9PK 1200(mm) | 9.81 | 0.143 | 1200 |
| 9PK 1290 | 10.19 | 0.154 | 1290 |
| 9PK 1640 | 11.75 | 0.196 | 1640 |
| 9PK 1725 | 12.16 | 0.206 | 1725 |
| 9PK 1825 | 12.66 | 0.218 | 1825 |
| 9PK 1885 | 12.97 | 0.225 | 1885 |
| 9PK 1920 | 13.15 | 0.229 | 1920 |
| 9PK 1925 | 13.17 | 0.230 | 1925 |
| 9PK 2030 | 13.73 | 0.242 | 2030 |
| 9PK 2060 | 13.89 | 0.246 | 2060 |
| 9PK 2080 | 14.00 | 0.248 | 2080 |
| 9PK 2125 | 14.25 | 0.253 | 2125 |
| 9PK 2200 | 14.67 | 0.263 | 2200 |
| 9PK 2260 | 15.01 | 0.270 | 2260 |
| 9PK 2295 | 15.21 | 0.274 | 2295 |
| 9PK 2325 | 15.39 | 0.278 | 2325 |
| 9PK 2550 | 16.75 | 0.304 | 2550 |
| 9PK 2580 | 16.93 | 0.308 | 2580 |
| 9PK 2618 | 17.17 | 0.313 | 2618 |
| 9PK 2642 | 17.32 | 0.315 | 2642 |
| 9PK 2700 | 17.70 | 0.322 | 2700 |
| 9PK 2800 | 18.35 | 0.334 | 2800 |
| 9PK 2835 | 18.58 | 0.338 | 2835 |
| 10PK 1075 | 9.44 | 0.185 | 1075 |
| 10PK 1108 | 9.64 | 0.191 | 1108 |
| 10PK 1136 | 9.80 | 0.196 | 1136 |
| 10PK 1145 | 9.86 | 0.197 | 1145 |
| 10PK 1213 | 10.26 | 0.209 | 1213 |

| Belt No. | List Price | Wt.(Approx)kg | E.O.C(mm) |
|-----------|------------|---------------|-----------|
| 10PK 1360 | 11.17 | 0.234 | 1360 |
| 10PK 1447 | 11.73 | 0.249 | 1447 |
| 10PK 1505 | 12.10 | 0.259 | 1505 |
| 10PK 1538 | 12.32 | 0.265 | 1538 |
| 10PK 1570 | 12.53 | 0.270 | 1570 |
| 10PK 1688 | 13.32 | 0.291 | 1688 |
| 10PK 1725 | 13.58 | 0.297 | 1725 |
| 10PK 1768 | 13.87 | 0.304 | 1768 |
| 10PK 1845 | 14.41 | 0.318 | 1845 |
| 10PK 1950 | 15.17 | 0.336 | 1950 |
| 10PK 2063 | 15.99 | 0.355 | 2063 |
| 11PK 1515 | 12.51 | 0.287 | 1515 |
| 11PK 1530 | 12.69 | 0.290 | 1530 |
| 11PK 2020 | 15.67 | 0.383 | 2020 |
| 11PK 2040 | 16.08 | 0.387 | 2040 |
| 11PK 2055 | 16.15 | 0.389 | 2055 |
| 12PK 1165 | 11.34 | 0.242 | 1165 |
| 12PK 1515 | 13.57 | 0.315 | 1515 |
| 12PK 1550 | 13.80 | 0.322 | 1550 |
| 12PK 1580 | 13.99 | 0.329 | 1580 |
| 12PK 1605 | 14.16 | 0.334 | 1605 |
| 12PK 1623 | 14.28 | 0.337 | 1623 |
| 12PK 1815 | 15.56 | 0.377 | 1815 |
| 12PK 1830 | 15.66 | 0.380 | 1830 |
| 12PK 1863 | 15.88 | 0.387 | 1863 |
| 12PK 1870 | 15.93 | 0.389 | 1870 |
| 12PK 1962 | 16.56 | 0.408 | 1962 |
| 12PK 2500 | 20.38 | 0.520 | 2500 |

Automotive - Timing Belt


Timing belt have mainly been used for automotive overhead camshaft(OHC) drives and guarantee variable speed change and high temperature drive conditions. These belt drive offer many advantages over conventional chain and gear drives. Timing belt is also called "Synchronous belt".

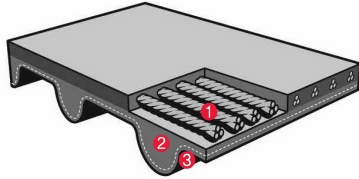

Features

- Quieter running
- No lubrication needed
- Non-slip engagement
- Economical operation
- Excellent mechanical efficiency

| Construction | Functions & Materials |
|------------------|---|
| ① Tension member | Fiberglass cords with high tensile strength, excellent flexibility and which eliminate belt stretching. |
| ② Rubber teeth | Excellent heat and oil resistance, adhesion both on tensile member and tooth fabric. |
| ③ Nylon fabric | Excellent wear-resistant, low friction coefficient facing gives long service life. |

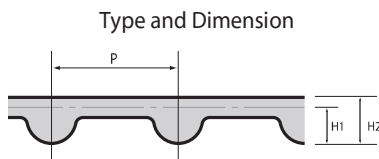

Type and Dimension

| | RU | YU | ZBD | ZBS | RS | YS(S8M) |
|-------|-------|-------|-------|-------|-------|---------|
| Pitch | 9.525 | 8.000 | 9.525 | 9.525 | 9.525 | 8.000 |
| H1 | 3.44 | 3.02 | 2.76 | 2.76 | 3.50 | 2.95 |
| H2 | 5.40 | 5.20 | 5.06 | 5.06 | 5.50 | 5.20 |

RU Section

| Belt No. | CR | | HNBR | |
|-------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 91 RU 19.1 | 7.10 | 0.156 | 17.46 | 0.132 |
| 92 RU 22 | 8.19 | 0.180 | 20.06 | 0.152 |
| 105 RU 22 | 8.90 | 0.205 | 22.43 | 0.174 |
| 108 RU 25.4 | 10.58 | 0.247 | 26.79 | 0.209 |
| 111 RU 25.4 | 10.75 | 0.253 | 27.59 | 0.215 |
| 113 RU 24 | 10.32 | 0.245 | 26.34 | 0.207 |
| 113 RU 25.4 | 10.89 | 0.258 | 27.81 | 0.218 |
| 113 RU 25.8 | 10.89 | 0.258 | 27.81 | 0.218 |
| 122 RU 19 | 8.61 | 0.209 | 22.40 | 0.177 |
| 122 RU 19.1 | 8.61 | 0.209 | 22.40 | 0.177 |
| 122 RU 24 | 10.87 | 0.264 | 28.29 | 0.224 |

| Belt No. | CR | | HNBR | |
|-------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 122 RU 29 | 12.91 | 0.314 | 33.59 | 0.266 |
| 123 RU 24 | 10.95 | 0.266 | 28.41 | 0.225 |
| 123 RU 28 | 13.00 | 0.316 | 33.74 | 0.268 |
| 127 RU 25.4 | 11.84 | 0.291 | 30.84 | 0.245 |
| 149 RU 25 | 13.26 | 0.340 | 35.42 | 0.288 |
| 149 RU 25.4 | 13.26 | 0.340 | 35.42 | 0.288 |
| 151 RU 29 | 15.02 | 0.388 | 40.34 | 0.328 |
| 151 RU 30 | 16.02 | 0.414 | 43.02 | 0.350 |
| 153 RU 29 | 15.14 | 0.393 | 40.90 | 0.333 |
| 163 RU 25.4 | 14.15 | 0.372 | 38.48 | 0.315 |

YU Section

| Belt No. | CR | | HNBR | |
|------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 65 YU 12.7 | 3.67 | 0.054 | 7.25 | 0.046 |
| 65 YU 13 | 3.77 | 0.056 | 7.45 | 0.047 |
| 99 YU 19.1 | 6.80 | 0.124 | 15.08 | 0.105 |
| 107 YU 22 | 8.13 | 0.153 | 18.28 | 0.129 |
| 107 YU 25 | 9.48 | 0.178 | 21.32 | 0.151 |
| 145 YU 22 | 9.78 | 0.207 | 23.63 | 0.176 |

| Belt No. | CR | | HNBR | |
|-------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 154 YU 22 | 10.22 | 0.220 | 24.90 | 0.187 |
| 168 YU 22 | 10.80 | 0.240 | 26.75 | 0.203 |
| 168 YU 25.4 | 12.60 | 0.280 | 31.20 | 0.237 |
| 207 YU 32 | 18.81 | 0.444 | 48.27 | 0.375 |
| 259 YU 32 | 22.26 | 0.555 | 59.19 | 0.471 |

ZBD / ZBS Section

| Belt No. | CR | | HNBR | |
|-----------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 55 ZBD 13 | 3.78 | 0.056 | 7.57 | 0.048 |

| Belt No. | CR | | HNBR | |
|-------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 55 ZBS 12.7 | 3.67 | 0.054 | 7.36 | 0.046 |

S8M Section

| Belt No. | CR | | HNBR | |
|--------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 127 S8M 520 | 3.47 | 0.054 | 7.75 | 0.053 |
| 200 S8M 1168 | 8.70 | 0.191 | 23.44 | 0.186 |
| 240 S8M 1352 | 11.62 | 0.267 | 32.24 | 0.260 |
| 250 S8M 1312 | | | | |

| Belt No. | CR | | HNBR | |
|--------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 290 S8M 1096 | | | | |
| 290 S8M 1352 | 13.79 | 0.317 | 38.29 | 0.309 |
| 290 S8M 1384 | 14.04 | 0.325 | 39.04 | 0.316 |

STS Section

| Belt No. | CR | | HNBR | |
|------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 110 STS 20 | 7.23 | 0.144 | 18.35 | 0.139 |
| 146 STS 20 | 8.70 | 0.191 | 23.44 | 0.186 |

| Belt No. | CR | | HNBR | |
|------------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 169 STS 24 | 11.62 | 0.267 | 32.24 | 0.260 |

RS Section

| Belt No. | CR | | HNBR | |
|-----------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 111 RS 17 | 7.17 | 0.169 | 18.40 | 0.144 |

| Belt No. | CR | | HNBR | |
|-----------|------------|---------------|------------|---------------|
| | List Price | Wt.(Approx)kg | List Price | Wt.(Approx)kg |
| 111 RS 20 | 8.42 | 0.198 | 21.60 | 0.169 |

Agricultural Belt

Wrapped Belt

Raw Edge Cogged Belt

Agricultural

DRB agricultural belt are optimized in the quality required on such sophisticated farm machines as combines, transplanting and cultivating machines, whose high performance and compact size require extremely high reverse flexibility and shock from heat or sudden load.

DRB agricultural belt provide the highest performance under such tough conditions as they are specially designed with raw materials of outstanding flexibility, resistance against heat and dynamic elongation.



DONGIL SUPERSTAR (RED)

Agricultural V-belt, made of synthetic rubber with superior resistance against heat and climate changes, provides outstanding performance in reverse bending operation as the cover fabric is reinforced with specially laminated fabrics.

DONGIL SUPERSTAR (GREEN)

DRB Green agricultural belt are specially structured by powerful aramid cord based on the outstanding performance of RED belt, it provides the excellent tensile strength and low shrinkages at the shock load. It is ideal for driving, harvesting, transmission, cutting, hydrostatic transmission of combines.

Comparison of Agricultural Belt Performance

| Belt Category | Flexibility | Strength | Elongation Rate | Applications |
|---------------|-------------|-----------|-----------------|------------------------|
| Classical | Good | Good | Good | Power plough, thresher |
| RED | Excellent | Good | Good | Binder, combine |
| GREEN | Excellent | Excellent | Excellent | Planter, combine |


Wrapped Belt



Features

- Highly flexible and thus suitable for conditions requiring high flexibility and a small pulley diameter.
- Assures uniform performance over the entire belt length for the entire belt life.
- Resistant to heat, oil and abrasion.

Nominal Dimension




LA Section

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|-------|------------|---------------|--------------------|
| LA 29(inch) | RED | 4.68 | 0.085 | 762 |
| LA 32 | RED | 4.86 | 0.087 | 838 |
| LA 33 | RED | 4.93 | 0.090 | 863 |
| LA 36 | RED | 5.11 | 0.098 | 940 |
| LA 37 | RED | 5.18 | 0.101 | 965 |
| LA 38 | RED | 5.24 | 0.111 | 990 |
| LA 40 | RED | 5.36 | 0.117 | 1041 |
| LA 41 | RED | 5.43 | 0.120 | 1067 |
| LA 44 | RED | 5.62 | 0.129 | 1143 |
| LA 53 | RED | 6.18 | 0.155 | 1371 |
| LA 57 | RED | 6.43 | 0.167 | 1473 |
| LA 59 | RED | 6.56 | 0.173 | 1524 |
| LA 65 | RED | 6.94 | 0.191 | 1676 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|
| LA 66 | RED | 7.00 | 0.193 | 1702 |
| LA 67 | RED | 7.07 | 0.196 | 1727 |
| LA 74 | RED | 7.51 | 0.217 | 1905 |
| LA 88 | RED | 8.40 | 0.258 | 2260 |
| LA 89 | RED | 8.47 | 0.261 | 2286 |
| LA 27 | GREEN | 6.79 | 0.079 | 711 |
| LA 29 | GREEN | 6.91 | 0.085 | 762 |
| LA 37 | GREEN | 7.46 | 0.108 | 965 |
| LA 43 | GREEN | 7.96 | 0.126 | 1117 |
| LA 44 | GREEN | 8.04 | 0.129 | 1143 |
| LA 45 | GREEN | 8.14 | 0.132 | 1168 |
| LA 59 | GREEN | 9.59 | 0.173 | 1524 |

Nominal Dimension




LB Section

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|-------|------------|---------------|--------------------|
| LB 23(inch) | RED | 6.87 | 0.100 | 614 |
| LB 25 | RED | 6.95 | 0.109 | 665 |
| LB 26 | RED | 6.99 | 0.113 | 690 |
| LB 28 | RED | 7.08 | 0.122 | 741 |
| LB 31 | RED | 7.22 | 0.135 | 817 |
| LB 32 | RED | 7.27 | 0.139 | 843 |
| LB 33 | RED | 7.32 | 0.144 | 868 |
| LB 35 | RED | 7.43 | 0.152 | 919 |
| LB 36 | RED | 7.49 | 0.157 | 944 |
| LB 37 | RED | 7.55 | 0.161 | 970 |
| LB 38 | RED | 7.61 | 0.165 | 995 |
| LB 39 | RED | 7.67 | 0.170 | 1020 |
| LB 40 | RED | 7.74 | 0.174 | 1046 |
| LB 41 | RED | 7.80 | 0.178 | 1071 |
| LB 42 | RED | 7.87 | 0.183 | 1097 |
| LB 43 | RED | 7.94 | 0.187 | 1122 |
| LB 44 | RED | 8.02 | 0.191 | 1147 |
| LB 45 | RED | 8.09 | 0.196 | 1173 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|
| LB 46 | RED | 8.17 | 0.200 | 1198 |
| LB 46.5 | RED | 8.20 | 0.202 | 1211 |
| LB 47 | RED | 8.24 | 0.204 | 1224 |
| LB 48 | RED | 8.32 | 0.209 | 1249 |
| LB 49 | RED | 8.40 | 0.213 | 1274 |
| LB 50 | RED | 8.49 | 0.217 | 1300 |
| LB 51 | RED | 8.57 | 0.222 | 1325 |
| LB 52 | RED | 8.66 | 0.226 | 1351 |
| LB 52.5 | RED | 8.70 | 0.228 | 1363 |
| LB 53 | RED | 8.74 | 0.231 | 1376 |
| LB 53.5 | RED | 8.79 | 0.233 | 1389 |
| LB 54 | RED | 8.83 | 0.235 | 1401 |
| LB 55 | RED | 8.93 | 0.239 | 1427 |
| LB 56 | RED | 9.02 | 0.244 | 1452 |
| LB 57 | RED | 9.11 | 0.248 | 1478 |
| LB 58 | RED | 9.21 | 0.252 | 1503 |
| LB 59 | RED | 9.31 | 0.257 | 1528 |
| LB 60 | RED | 9.41 | 0.261 | 1554 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|----------|-------|------------|---------------|--------------------|
| LB 61 | RED | 9.51 | 0.265 | 1579 | LB 46 | GREEN | 15.97 | 0.191 | 1198 |
| LB 62 | RED | 9.62 | 0.269 | 1605 | LB 48 | GREEN | 16.45 | 0.199 | 1249 |
| LB 68 | RED | 10.28 | 0.296 | 1757 | LB 49 | GREEN | 16.69 | 0.203 | 1274 |
| LB 71 | RED | 10.63 | 0.309 | 1833 | LB 49.5 | GREEN | 16.81 | 0.205 | 1287 |
| LB 72 | RED | 10.75 | 0.313 | 1859 | LB 50 | GREEN | 16.93 | 0.207 | 1300 |
| LB 77 | RED | 11.39 | 0.335 | 1986 | LB 52 | GREEN | 17.42 | 0.215 | 1351 |
| LB 79 | RED | 11.65 | 0.343 | 2036 | LB 53 | GREEN | 17.66 | 0.220 | 1376 |
| LB 86 | RED | 12.64 | 0.374 | 2214 | LB 54 | GREEN | 17.91 | 0.224 | 1401 |
| LB 98 | RED | 14.53 | 0.426 | 2519 | LB 55 | GREEN | 18.15 | 0.228 | 1427 |
| LB 101 | RED | 15.05 | 0.439 | 2595 | LB 56 | GREEN | 18.40 | 0.232 | 1452 |
| LB 106 | RED | 15.94 | 0.460 | 2722 | LB 57 | GREEN | 18.64 | 0.236 | 1478 |
| LB 110 | RED | 16.68 | 0.478 | 2824 | LB 60 | GREEN | 19.38 | 0.249 | 1554 |
| LB 113 | RED | 17.26 | 0.491 | 2900 | LB 61 | GREEN | 19.63 | 0.253 | 1579 |
| LB 125 | RED | 19.73 | 0.544 | 3205 | LB 62 | GREEN | 19.87 | 0.257 | 1605 |
| LB 126 | RED | 19.95 | 0.548 | 3230 | LB 63 | GREEN | 20.12 | 0.261 | 1630 |
| LB 129 | RED | 20.61 | 0.561 | 3306 | LB 65 | GREEN | 20.62 | 0.269 | 1681 |
| LB 32 | GREEN | 12.63 | 0.133 | 843 | LB 66 | GREEN | 20.87 | 0.273 | 1706 |
| LB 33 | GREEN | 12.87 | 0.137 | 868 | LB 67 | GREEN | 21.12 | 0.278 | 1732 |
| LB 34 | GREEN | 13.10 | 0.141 | 893 | LB 68 | GREEN | 21.37 | 0.282 | 1757 |
| LB 38 | GREEN | 14.05 | 0.157 | 995 | LB 69 | GREEN | 21.62 | 0.286 | 1782 |
| LB 39 | GREEN | 14.29 | 0.162 | 1020 | LB 94 | GREEN | 28.02 | 0.389 | 2417 |
| LB 41 | GREEN | 14.77 | 0.170 | 1071 | LB 96 | GREEN | 28.54 | 0.398 | 2468 |
| LB 42 | GREEN | 15.00 | 0.174 | 1097 | LB 97 | GREEN | 28.80 | 0.402 | 2494 |
| LB 43 | GREEN | 15.24 | 0.178 | 1122 | LB 106 | GREEN | 31.19 | 0.440 | 2722 |
| LB 44 | GREEN | 15.48 | 0.182 | 1147 | LB 108 | GREEN | 31.72 | 0.448 | 2773 |


Nominal Dimension



| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|-------|------------|---------------|--------------------|----------|-------|------------|---------------|--------------------|
| LC 43(inch) | RED | 12.43 | 0.293 | 1127 | LC 68 | RED | 16.09 | 0.464 | 1762 |
| LC 44 | RED | 12.57 | 0.300 | 1152 | LC 69 | RED | 16.24 | 0.470 | 1787 |
| LC 45 | RED | 12.71 | 0.307 | 1178 | LC 71 | RED | 16.55 | 0.484 | 1838 |
| LC 51 | RED | 13.56 | 0.348 | 1330 | LC 72 | RED | 16.71 | 0.491 | 1863 |
| LC 52 | RED | 13.70 | 0.354 | 1355 | LC 74 | RED | 17.02 | 0.504 | 1914 |
| LC 59 | RED | 14.73 | 0.402 | 1533 | LC 75 | RED | 17.18 | 0.511 | 1940 |
| LC 60 | RED | 14.88 | 0.409 | 1559 | LC 76 | RED | 17.34 | 0.518 | 1965 |
| LC 63 | RED | 15.33 | 0.429 | 1635 | LC 78 | RED | 17.66 | 0.532 | 2016 |
| LC 65 | RED | 15.63 | 0.443 | 1686 | LC 79 | RED | 17.82 | 0.538 | 2041 |
| LC 66 | RED | 15.78 | 0.450 | 1711 | LC 81 | RED | 18.14 | 0.552 | 2092 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|----------|-------|------------|---------------|--------------------|
| LC 83 | RED | 18.47 | 0.566 | 2143 | LC 151 | RED | 31.04 | 1.030 | 3870 |
| LC 84 | RED | 18.63 | 0.573 | 2168 | LC 45 | GREEN | 25.38 | 0.297 | 1178 |
| LC 87 | RED | 19.13 | 0.593 | 2244 | LC 53 | GREEN | 28.03 | 0.350 | 1381 |
| LC 94 | RED | 20.31 | 0.641 | 2422 | LC 54 | GREEN | 28.37 | 0.356 | 1406 |
| LC 107 | RED | 22.57 | 0.730 | 2752 | LC 62 | GREEN | 31.08 | 0.409 | 1609 |
| LC 118 | RED | 24.58 | 0.804 | 3032 | LC 65 | GREEN | 32.11 | 0.429 | 1686 |
| LC 124 | RED | 25.70 | 0.845 | 3184 | LC 81 | GREEN | 37.74 | 0.534 | 2092 |
| LC 126 | RED | 26.08 | 0.859 | 3235 | LC 99 | GREEN | 44.33 | 0.653 | 2549 |
| LC 133 | RED | 27.43 | 0.906 | 3413 | LC 104 | GREEN | 46.21 | 0.686 | 2676 |
| LC 135 | RED | 27.82 | 0.920 | 3464 | LC 107 | GREEN | 47.35 | 0.706 | 2752 |
| LC 136 | RED | 28.01 | 0.927 | 3489 | LC 145 | GREEN | 62.43 | 0.957 | 3718 |
| LC 145 | RED | 29.81 | 0.989 | 3718 | LC 155 | GREEN | 66.60 | 1.023 | 3972 |


Raw Edge Cogged Belt



Features

- Highly flexible and thus suitable for conditions requiring high flexibility and a small pulley diameter.
- Assures uniform performance over the entire belt length for the entire belt life.
- Resistant to heat, oil and abrasion.


Nominal Dimension



LA Section

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|-------|------------|---------------|--------------------|----------|-------|------------|---------------|--------------------|
| LA 26(inch) | RED | 2.51 | 0.070 | 686 | LA 42 | RED | 3.23 | 0.113 | 1092 |
| LA 28 | RED | 2.60 | 0.075 | 736 | LA 43 | RED | 3.28 | 0.115 | 1117 |
| LA 29 | RED | 2.64 | 0.078 | 762 | LA 44 | RED | 3.32 | 0.118 | 1143 |
| LA 30 | RED | 2.69 | 0.080 | 787 | LA 44.5 | RED | 3.35 | 0.119 | 1155 |
| LA 32 | RED | 2.78 | 0.086 | 838 | LA 53 | RED | 3.74 | 0.142 | 1371 |
| LA 36 | RED | 2.96 | 0.096 | 940 | LA 55 | RED | 3.84 | 0.147 | 1422 |
| LA 38 | RED | 3.05 | 0.102 | 990 | LA 62 | RED | 4.17 | 0.166 | 1600 |
| LA 38.5 | RED | 3.07 | 0.103 | 1003 | LA 25 | Green | 4.79 | 0.067 | 660 |
| LA 39 | RED | 3.10 | 0.104 | 1016 | LA 26.2 | Green | 4.83 | 0.071 | 691 |
| LA 41 | RED | 3.19 | 0.110 | 1067 | LA 27 | Green | 4.86 | 0.073 | 711 |
| LA 41.5 | RED | 3.21 | 0.111 | 1079 | LA 33 | Green | 5.40 | 0.088 | 863 |

Nominal Dimension




LB Section

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|-------|------------|---------------|--------------------|----------|-------|------------|---------------|--------------------|
| LB 27(inch) | RED | 3.45 | 0.101 | 716 | LB 39 | RED | 4.51 | 0.146 | 1020 |
| LB 29 | RED | 3.63 | 0.109 | 766 | LB 40 | RED | 4.59 | 0.150 | 1046 |
| LB 30 | RED | 3.72 | 0.113 | 792 | LB 41 | RED | 4.68 | 0.154 | 1071 |
| LB 31 | RED | 3.81 | 0.116 | 817 | LB 41.5 | RED | 4.72 | 0.156 | 1084 |
| LB 33 | RED | 3.98 | 0.124 | 868 | LB 42 | RED | 4.77 | 0.158 | 1097 |
| LB 34 | RED | 4.07 | 0.128 | 893 | LB 43 | RED | 4.85 | 0.161 | 1122 |
| LB 35 | RED | 4.16 | 0.131 | 919 | LB 44 | RED | 4.94 | 0.165 | 1147 |
| LB 36 | RED | 4.25 | 0.135 | 944 | LB 45 | RED | 5.02 | 0.169 | 1173 |
| LB 37 | RED | 4.33 | 0.139 | 970 | LB 45.5 | RED | 5.06 | 0.171 | 1186 |
| LB 38 | RED | 4.42 | 0.143 | 995 | LB 46 | RED | 5.11 | 0.173 | 1198 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|
| LB 47 | RED | 5.19 | 0.176 | 1224 |
| LB 48 | RED | 5.27 | 0.180 | 1249 |
| LB 49 | RED | 5.36 | 0.184 | 1274 |
| LB 49.5 | RED | 5.40 | 0.186 | 1287 |
| LB 50 | RED | 5.44 | 0.188 | 1300 |
| LB 50.5 | RED | 5.48 | 0.190 | 1313 |
| LB 51 | RED | 5.53 | 0.191 | 1325 |
| LB 52 | RED | 5.61 | 0.195 | 1351 |
| LB 54 | RED | 5.77 | 0.203 | 1401 |
| LB 55 | RED | 5.86 | 0.206 | 1427 |
| LB 56 | RED | 5.94 | 0.210 | 1452 |
| LB 57 | RED | 6.02 | 0.214 | 1478 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|
| LB 58 | RED | 6.10 | 0.218 | 1503 |
| LB 61 | RED | 6.35 | 0.229 | 1579 |
| LB 62 | RED | 6.43 | 0.233 | 1605 |
| LB 65 | RED | 6.67 | 0.244 | 1681 |
| LB 67 | RED | 6.82 | 0.251 | 1732 |
| LB 68 | RED | 6.90 | 0.255 | 1757 |
| LB 69 | RED | 6.98 | 0.259 | 1782 |
| LB 88 | RED | 8.42 | 0.330 | 2265 |
| LB 92 | RED | 8.71 | 0.345 | 2367 |
| LB 94 | RED | 8.85 | 0.353 | 2417 |
| LB 44.5 | GREEN | 8.16 | 0.167 | 1160 |
| LB 46.5 | GREEN | 8.26 | 0.175 | 1211 |

Nominal Dimension



LC Section

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-------------|-------|------------|---------------|--------------------|
| LC 24(inch) | RED | 4.71 | 0.143 | 644 |
| LC 25.5 | RED | 4.87 | 0.152 | 682 |
| LC 35 | RED | 5.85 | 0.209 | 924 |
| LC 36 | RED | 5.96 | 0.215 | 949 |
| LC 38 | RED | 6.17 | 0.227 | 1000 |
| LC 38.5 | RED | 6.22 | 0.230 | 1012 |
| LC 39 | RED | 6.27 | 0.233 | 1025 |
| LC 41.5 | RED | 6.53 | 0.248 | 1089 |
| LC 42 | RED | 6.59 | 0.251 | 1101 |
| LC 43 | RED | 6.69 | 0.256 | 1127 |
| LC 45.5 | RED | 6.95 | 0.271 | 1190 |
| LC 48 | RED | 7.22 | 0.286 | 1254 |
| LC 48.5 | RED | 7.27 | 0.289 | 1266 |
| LC 52 | RED | 7.64 | 0.310 | 1355 |

| Belt No. | Grade | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|-------|------------|---------------|--------------------|
| LC 54 | RED | 7.86 | 0.322 | 1406 |
| LC 55 | RED | 7.96 | 0.328 | 1432 |
| LC 56 | RED | 8.07 | 0.334 | 1457 |
| LC 57 | RED | 8.18 | 0.340 | 1482 |
| LC 58 | RED | 8.28 | 0.346 | 1508 |
| LC 58.5 | RED | 8.34 | 0.349 | 1520 |
| LC 59 | RED | 8.39 | 0.352 | 1533 |
| LC 60 | RED | 8.50 | 0.358 | 1559 |
| LC 62 | RED | 8.71 | 0.370 | 1609 |
| LC 69 | RED | 9.47 | 0.412 | 1787 |
| LC 79 | RED | 10.56 | 0.471 | 2041 |
| LC 37 | GREEN | 11.79 | 0.221 | 974 |
| LC 49.5 | GREEN | 15.06 | 0.295 | 1292 |

Specialty Belt

Double V-Belt

Round Belt


Open-ended V-Belt

FHP V-Belt

Variable Speed Belt


Specialty Belt

Double V-belt



Belt that enable power transmission on multiple axis by joining two general V-belt by their upper part.


Nominal Dimension



AA Section

| Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length | Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length |
|-------------|------------|---------------|-----------------------|----------|------------|---------------|-----------------------|
| AA 51(inch) | 8.00 | 0.202 | 53.1 | AA 90 | 13.22 | 0.357 | 92.1 |
| AA 55 | 8.60 | 0.218 | 57.1 | AA 92 | 13.45 | 0.365 | 94.1 |
| AA 60 | 9.33 | 0.238 | 62.1 | AA 96 | 13.90 | 0.381 | 98.1 |
| AA 68 | 10.45 | 0.270 | 70.1 | AA 105 | 14.84 | 0.416 | 107.1 |
| AA 75 | 11.39 | 0.297 | 77.1 | AA 112 | 15.53 | 0.444 | 114.1 |
| AA 80 | 12.02 | 0.317 | 82.1 | AA 120 | 16.25 | 0.476 | 122.1 |
| AA 85 | 12.63 | 0.337 | 87.1 | AA 128 | 16.92 | 0.508 | 130.1 |

Nominal Dimension




BB Section

| Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length | Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length |
|-------------|------------|---------------|-----------------------|----------|------------|---------------|-----------------------|
| BB 45(inch) | 9.29 | 0.272 | 47.9 | BB 81 | 13.06 | 0.489 | 83.9 |
| BB 51 | 9.92 | 0.308 | 53.9 | BB 85 | 13.47 | 0.513 | 87.9 |
| BB 55 | 10.35 | 0.332 | 57.9 | BB 90 | 13.98 | 0.543 | 92.9 |
| BB 60 | 10.87 | 0.362 | 62.9 | BB 92 | 14.19 | 0.556 | 94.9 |
| BB 68 | 11.71 | 0.410 | 70.9 | BB 93 | 14.29 | 0.561 | 95.9 |
| BB 71 | 12.02 | 0.429 | 73.9 | BB 94 | 14.39 | 0.567 | 96.9 |
| BB 73 | 12.23 | 0.441 | 75.9 | BB 96 | 14.59 | 0.579 | 98.9 |
| BB 74 | 12.33 | 0.447 | 76.9 | BB 97 | 14.70 | 0.585 | 99.9 |
| BB 75 | 12.44 | 0.453 | 77.9 | BB 105 | 15.51 | 0.634 | 107.9 |

| Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length |
|----------|------------|---------------|-----------------------|
| BB 107 | 15.71 | 0.646 | 109.9 |
| BB 108 | 15.81 | 0.652 | 110.9 |
| BB 111 | 16.11 | 0.670 | 113.9 |
| BB 112 | 16.21 | 0.676 | 114.9 |
| BB 116 | 16.61 | 0.700 | 118.9 |
| BB 118 | 16.81 | 0.712 | 120.9 |
| BB 120 | 17.01 | 0.724 | 122.9 |
| BB 122 | 17.21 | 0.736 | 124.9 |
| BB 123 | 17.31 | 0.742 | 125.9 |
| BB 124 | 17.41 | 0.748 | 126.9 |
| BB 128 | 17.81 | 0.773 | 130.9 |
| BB 129 | 17.91 | 0.779 | 131.9 |
| BB 130 | 18.01 | 0.785 | 132.9 |
| BB 136 | 18.60 | 0.821 | 138.9 |
| BB 140 | 18.99 | 0.845 | 142.9 |
| BB 144 | 19.38 | 0.869 | 146.9 |
| BB 155 | 20.45 | 0.936 | 157.9 |

| Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length |
|----------|------------|---------------|-----------------------|
| BB 158 | 20.74 | 0.954 | 160.9 |
| BB 162 | 21.12 | 0.978 | 164.9 |
| BB 168 | 21.70 | 1.014 | 170.9 |
| BB 169 | 21.79 | 1.020 | 171.9 |
| BB 173 | 22.18 | 1.044 | 175.9 |
| BB 180 | 22.84 | 1.086 | 182.9 |
| BB 182 | 23.03 | 1.099 | 184.9 |
| BB 190 | 23.78 | 1.147 | 192.9 |
| BB 195 | 24.25 | 1.177 | 197.9 |
| BB 210 | 25.63 | 1.268 | 212.9 |
| BB 226 | 27.09 | 1.364 | 228.9 |
| BB 230 | 27.46 | 1.388 | 232.9 |
| BB 240 | 28.35 | 1.449 | 241.4 |
| BB 270 | 30.99 | 1.630 | 271.4 |
| BB 277 | 31.60 | 1.672 | 278.4 |
| BB 300 | 33.55 | 1.811 | 301.4 |

Nominal Dimension




CC Section

| Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length |
|--------------|------------|---------------|-----------------------|
| CC 81 (inch) | 13.11 | 0.943 | 85.2 |
| CC 85 | 13.74 | 0.989 | 89.2 |
| CC 90 | 14.55 | 1.048 | 94.2 |
| CC 96 | 15.56 | 1.117 | 100.2 |
| CC 105 | 17.13 | 1.222 | 109.2 |
| CC 112 | 18.42 | 1.304 | 116.2 |
| CC 120 | 19.95 | 1.397 | 124.2 |
| CC 128 | 21.55 | 1.490 | 132.2 |
| CC 136 | 23.21 | 1.583 | 140.2 |
| CC 144 | 24.95 | 1.676 | 148.2 |
| CC 158 | 28.14 | 1.839 | 162.2 |
| CC 162 | 29.09 | 1.886 | 166.2 |

| Belt No. | List Price | Wt.(Approx)kg | Standard Pitch Length |
|----------|------------|---------------|-----------------------|
| CC 173 | 31.79 | 2.014 | 177.2 |
| CC 180 | 33.57 | 2.095 | 184.2 |
| CC 195 | 37.56 | 2.270 | 199.2 |
| CC 210 | 41.79 | 2.444 | 214.2 |
| CC 240 | 50.96 | 2.793 | 244.2 |
| CC 270 | 61.06 | 3.143 | 272.2 |
| CC 300 | 72.11 | 3.492 | 302.2 |
| CC 330 | 84.09 | 3.841 | 332.2 |
| CC 360 | 97.02 | 4.190 | 362.2 |
| CC 390 | 110.89 | 4.539 | 392.2 |
| CC 420 | 125.70 | 4.889 | 422.2 |


Round Belt



Round sectional shape for multiple axis power transmission.

| Belt No. | List Price | Belt No. | List Price |
|-------------------|------------|-----------------|------------|
| ROUND 1/2 850(mm) | 7.88 | ROUND 1/4 1670 | 30.15 |
| ROUND 1/2 1016 | 8.15 | ROUND 1/4 4270 | 67.49 |
| ROUND 1/2 1066 | 8.23 | ROUND 3/8 890 | 7.21 |
| ROUND 1/2 3920 | 15.24 | ROUND 3/8 950 | 7.33 |
| ROUND 1/2 4250 | 16.34 | ROUND 3/8 1320 | 8.01 |
| ROUND 1/2 4283 | 16.46 | ROUND 3/8 1330 | 8.03 |
| ROUND 1/4 930 | 19.12 | ROUND 5/8 3860 | 17.10 |
| ROUND 1/4 980 | 19.87 | ROUND 5/8 11280 | 45.80 |
| ROUND 1/4 1575 | 28.74 | ROUND 5/8 11450 | 46.25 |
| ROUND 1/4 1590 | 28.96 | ROUND 5/8 12450 | 48.72 |
| ROUND 1/4 1595 | 29.04 | ROUND 5/16 930 | 4.64 |


Open-ended V-Belt



Open-ended V-belt can be set without disassembling, and it can be jointed using a connector very easily.


| Belt No. | Grade | List Price | Belt No. | Grade | List Price |
|----------|-------------------|------------|----------|-------------------|------------|
| M 50(M) | | 309.07 | B 50 | | 375.08 |
| M 50 | GREEN Perforated | 310.63 | B 50 | GREEN Perforated | 419.54 |
| M 50 | Perforated | 349.07 | B 50 | Perforated | 415.08 |
| A 50 | | 280.28 | B 50 | Perforated B/BACK | 411.66 |
| A 50 | B/BACK | 278.77 | C 50 | | 481.18 |
| A 50 | GREEN Perforated | 322.20 | C 50 | GREEN Perforated | 526.95 |
| A 50 | Perforated | 320.28 | C 50 | Perforated | 521.18 |
| A 50 | Perforated B/BACK | 318.77 | | | |

FHP V-Belt



Compact design and can be used on small pulleys.

Nominal Dimension




3L Section

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length | Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|---------------|------------|---------------|------------------------|----------|------------|---------------|------------------------|
| 3L 170(10in.) | 1.91 | 0.025 | 17 | 3L 450 | 2.55 | 0.067 | 45 |
| 3L 180 | 1.93 | 0.027 | 18 | 3L 460 | 2.58 | 0.068 | 46 |
| 3L 190 | 1.95 | 0.028 | 19 | 3L 470 | 2.60 | 0.069 | 47 |
| 3L 200 | 1.97 | 0.030 | 20 | 3L 480 | 2.63 | 0.071 | 48 |
| 3L 210 | 1.99 | 0.031 | 21 | 3L 490 | 2.66 | 0.073 | 49 |
| 3L 220 | 2.01 | 0.033 | 22 | 3L 500 | 2.68 | 0.074 | 50 |
| 3L 230 | 2.03 | 0.034 | 23 | 3L 510 | 2.71 | 0.075 | 51 |
| 3L 240 | 2.06 | 0.036 | 24 | 3L 520 | 2.74 | 0.077 | 52 |
| 3L 250 | 2.08 | 0.037 | 25 | 3L 530 | 2.77 | 0.078 | 53 |
| 3L 260 | 2.10 | 0.038 | 26 | 3L 540 | 2.79 | 0.080 | 54 |
| 3L 270 | 2.12 | 0.040 | 27 | 3L 550 | 2.82 | 0.081 | 55 |
| 3L 280 | 2.14 | 0.041 | 28 | 3L 560 | 2.85 | 0.083 | 56 |
| 3L 290 | 2.16 | 0.043 | 29 | 3L 570 | 2.88 | 0.084 | 57 |
| 3L 300 | 2.19 | 0.044 | 30 | 3L 580 | 2.91 | 0.086 | 58 |
| 3L 310 | 2.21 | 0.046 | 31 | 3L 590 | 2.94 | 0.087 | 59 |
| 3L 320 | 2.23 | 0.047 | 32 | 3L 600 | 2.97 | 0.089 | 60 |
| 3L 330 | 2.25 | 0.049 | 33 | 3L 610 | 3.00 | 0.090 | 61 |
| 3L 340 | 2.28 | 0.050 | 34 | 3L 620 | 3.03 | 0.091 | 62 |
| 3L 350 | 2.30 | 0.052 | 35 | 3L 630 | 3.06 | 0.093 | 63 |
| 3L 360 | 2.32 | 0.053 | 36 | 3L 650 | 3.12 | 0.096 | 65 |
| 3L 370 | 2.35 | 0.055 | 37 | 3L 660 | 3.15 | 0.098 | 66 |
| 3L 380 | 2.37 | 0.056 | 38 | 3L 670 | 3.18 | 0.101 | 67 |
| 3L 390 | 2.40 | 0.058 | 39 | 3L 680 | 3.21 | 0.101 | 68 |
| 3L 400 | 2.42 | 0.059 | 40 | 3L 690 | 3.24 | 0.102 | 69 |
| 3L 410 | 2.45 | 0.061 | 41 | 3L 700 | 3.28 | 0.104 | 70 |
| 3L 420 | 2.47 | 0.062 | 42 | 3L 720 | 3.34 | 0.107 | 72 |
| 3L 430 | 2.50 | 0.064 | 43 | 3L 730 | 3.37 | 0.108 | 73 |
| 3L 440 | 2.52 | 0.065 | 44 | 3L 740 | 3.41 | 0.110 | 74 |

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|----------|------------|---------------|------------------------|
| 3L 750 | 3.44 | 0.111 | 75 |
| 3L 800 | 3.61 | 0.118 | 80 |

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|----------|------------|---------------|------------------------|
| 3L 850 | 3.78 | 0.126 | 85 |

Nominal Dimension




4L Section

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|---------------|------------|---------------|------------------------|
| 4L 180(10in.) | 2.64 | 0.052 | 18 |
| 4L 190 | 2.67 | 0.055 | 19 |
| 4L 195 | 2.69 | 0.056 | 19.5 |
| 4L 200 | 2.70 | 0.058 | 20 |
| 4L 210 | 2.73 | 0.061 | 21 |
| 4L 220 | 2.76 | 0.064 | 22 |
| 4L 230 | 2.79 | 0.067 | 23 |
| 4L 240 | 2.81 | 0.069 | 24 |
| 4L 250 | 2.84 | 0.072 | 25 |
| 4L 260 | 2.87 | 0.075 | 26 |
| 4L 270 | 2.90 | 0.078 | 27 |
| 4L 275 | 2.92 | 0.080 | 27.5 |
| 4L 280 | 2.93 | 0.081 | 28 |
| 4L 290 | 2.96 | 0.084 | 29 |
| 4L 300 | 2.99 | 0.087 | 30 |
| 4L 305 | 3.01 | 0.088 | 30.5 |
| 4L 310 | 3.02 | 0.090 | 31 |
| 4L 320 | 3.05 | 0.093 | 32 |
| 4L 330 | 3.08 | 0.095 | 33 |
| 4L 340 | 3.11 | 0.098 | 34 |
| 4L 350 | 3.14 | 0.101 | 35 |
| 4L 360 | 3.17 | 0.104 | 36 |
| 4L 370 | 3.20 | 0.107 | 37 |
| 4L 380 | 3.23 | 0.110 | 38 |
| 4L 390 | 3.27 | 0.113 | 39 |
| 4L 400 | 3.30 | 0.116 | 40 |
| 4L 410 | 3.33 | 0.119 | 41 |
| 4L 420 | 3.36 | 0.121 | 42 |
| 4L 430 | 3.39 | 0.124 | 43 |
| 4L 440 | 3.42 | 0.127 | 44 |
| 4L 450 | 3.46 | 0.130 | 45 |
| 4L 460 | 3.49 | 0.133 | 46 |
| 4L 470 | 3.52 | 0.136 | 47 |
| 4L 480 | 3.55 | 0.139 | 48 |

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|----------|------------|---------------|------------------------|
| 4L 490 | 3.59 | 0.142 | 49 |
| 4L 500 | 3.62 | 0.145 | 50 |
| 4L 510 | 3.65 | 0.147 | 51 |
| 4L 520 | 3.69 | 0.150 | 52 |
| 4L 530 | 3.72 | 0.153 | 53 |
| 4L 540 | 3.75 | 0.156 | 54 |
| 4L 550 | 3.79 | 0.159 | 55 |
| 4L 560 | 3.82 | 0.162 | 56 |
| 4L 570 | 3.86 | 0.165 | 57 |
| 4L 580 | 3.89 | 0.168 | 58 |
| 4L 590 | 3.92 | 0.171 | 59 |
| 4L 600 | 3.96 | 0.174 | 60 |
| 4L 610 | 3.99 | 0.176 | 61 |
| 4L 620 | 4.03 | 0.179 | 62 |
| 4L 630 | 4.06 | 0.182 | 63 |
| 4L 640 | 4.10 | 0.185 | 64 |
| 4L 650 | 4.13 | 0.188 | 65 |
| 4L 660 | 4.17 | 0.191 | 66 |
| 4L 670 | 4.21 | 0.194 | 67 |
| 4L 680 | 4.24 | 0.197 | 68 |
| 4L 690 | 4.28 | 0.200 | 69 |
| 4L 700 | 4.31 | 0.202 | 70 |
| 4L 710 | 4.35 | 0.205 | 71 |
| 4L 720 | 4.39 | 0.208 | 72 |
| 4L 730 | 4.42 | 0.211 | 73 |
| 4L 740 | 4.46 | 0.214 | 74 |
| 4L 750 | 4.50 | 0.217 | 75 |
| 4L 760 | 4.53 | 0.220 | 76 |
| 4L 770 | 4.57 | 0.223 | 77 |
| 4L 780 | 4.61 | 0.226 | 78 |
| 4L 790 | 4.65 | 0.228 | 79 |
| 4L 800 | 4.68 | 0.231 | 80 |
| 4L 810 | 4.72 | 0.234 | 81 |
| 4L 820 | 4.76 | 0.237 | 82 |

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length | Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|----------|------------|---------------|------------------------|----------|------------|---------------|------------------------|
| 4L 830 | 4.80 | 0.240 | 83 | 4L 920 | 5.15 | 0.266 | 92 |
| 4L 840 | 4.84 | 0.243 | 84 | 4L 930 | 5.19 | 0.269 | 93 |
| 4L 850 | 4.88 | 0.246 | 85 | 4L 940 | 5.23 | 0.272 | 94 |
| 4L 860 | 4.91 | 0.249 | 86 | 4L 950 | 5.27 | 0.275 | 95 |
| 4L 870 | 4.95 | 0.252 | 87 | 4L 960 | 5.31 | 0.278 | 96 |
| 4L 880 | 4.99 | 0.254 | 88 | 4L 970 | 5.35 | 0.281 | 97 |
| 4L 890 | 5.03 | 0.257 | 89 | 4L 980 | 5.39 | 0.283 | 98 |
| 4L 900 | 5.07 | 0.260 | 90 | 4L 990 | 5.43 | 0.286 | 99 |
| 4L 910 | 5.11 | 0.263 | 91 | 4L 1000 | 5.47 | 0.289 | 100 |

Nominal Dimension




5L Section

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length | Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|---------------|------------|---------------|------------------------|----------|------------|---------------|------------------------|
| 5L 220(10in.) | 3.21 | 0.104 | 22 | 5L 480 | 4.52 | 0.227 | 48 |
| 5L 230 | 3.26 | 0.109 | 23 | 5L 490 | 4.57 | 0.231 | 49 |
| 5L 240 | 3.30 | 0.113 | 24 | 5L 500 | 4.63 | 0.236 | 50 |
| 5L 250 | 3.35 | 0.118 | 25 | 5L 510 | 4.68 | 0.241 | 51 |
| 5L 260 | 3.40 | 0.123 | 26 | 5L 520 | 4.74 | 0.245 | 52 |
| 5L 270 | 3.45 | 0.127 | 27 | 5L 530 | 4.79 | 0.250 | 53 |
| 5L 280 | 3.50 | 0.132 | 28 | 5L 540 | 4.85 | 0.255 | 54 |
| 5L 290 | 3.55 | 0.137 | 29 | 5L 550 | 4.90 | 0.260 | 55 |
| 5L 300 | 3.60 | 0.142 | 30 | 5L 560 | 4.96 | 0.264 | 56 |
| 5L 310 | 3.65 | 0.146 | 31 | 5L 570 | 5.01 | 0.269 | 57 |
| 5L 320 | 3.69 | 0.151 | 32 | 5L 580 | 5.07 | 0.274 | 58 |
| 5L 330 | 3.74 | 0.156 | 33 | 5L 590 | 5.13 | 0.278 | 59 |
| 5L 340 | 3.79 | 0.160 | 34 | 5L 600 | 5.18 | 0.283 | 60 |
| 5L 350 | 3.85 | 0.165 | 35 | 5L 610 | 5.24 | 0.288 | 61 |
| 5L 360 | 3.90 | 0.170 | 36 | 5L 620 | 5.29 | 0.293 | 62 |
| 5L 370 | 3.95 | 0.175 | 37 | 5L 630 | 5.35 | 0.297 | 63 |
| 5L 380 | 4.00 | 0.179 | 38 | 5L 640 | 5.41 | 0.302 | 64 |
| 5L 390 | 4.05 | 0.184 | 39 | 5L 650 | 5.47 | 0.307 | 65 |
| 5L 400 | 4.10 | 0.189 | 40 | 5L 660 | 5.52 | 0.312 | 66 |
| 5L 410 | 4.15 | 0.194 | 41 | 5L 670 | 5.58 | 0.316 | 67 |
| 5L 415 | 4.18 | 0.196 | 41.5 | 5L 680 | 5.64 | 0.321 | 68 |
| 5L 420 | 4.20 | 0.198 | 42 | 5L 690 | 5.70 | 0.326 | 69 |
| 5L 430 | 4.26 | 0.203 | 43 | 5L 695 | 5.73 | 0.328 | 69.5 |
| 5L 440 | 4.31 | 0.208 | 44 | 5L 700 | 5.76 | 0.330 | 70 |
| 5L 450 | 4.36 | 0.212 | 45 | 5L 710 | 5.82 | 0.335 | 71 |
| 5L 460 | 4.41 | 0.217 | 46 | 5L 720 | 5.88 | 0.340 | 72 |
| 5L 470 | 4.47 | 0.222 | 47 | 5L 730 | 5.94 | 0.348 | 73 |

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|----------|------------|---------------|------------------------|
| 5L 740 | 6.00 | 0.349 | 74 |
| 5L 750 | 6.06 | 0.354 | 75 |
| 5L 760 | 6.12 | 0.359 | 76 |
| 5L 770 | 6.18 | 0.363 | 77 |
| 5L 780 | 6.24 | 0.368 | 78 |
| 5L 790 | 6.30 | 0.373 | 79 |
| 5L 800 | 6.36 | 0.377 | 80 |
| 5L 810 | 6.42 | 0.382 | 81 |
| 5L 820 | 6.48 | 0.387 | 82 |
| 5L 830 | 6.54 | 0.392 | 83 |
| 5L 840 | 6.61 | 0.396 | 84 |
| 5L 850 | 6.67 | 0.401 | 85 |
| 5L 860 | 6.73 | 0.401 | 86 |

| Belt No. | List Price | Wt.(Approx)kg | Effective pitch length |
|----------|------------|---------------|------------------------|
| 5L 870 | 6.79 | 0.411 | 87 |
| 5L 880 | 6.86 | 0.415 | 88 |
| 5L 890 | 6.92 | 0.420 | 89 |
| 5L 900 | 6.98 | 0.425 | 90 |
| 5L 910 | 7.05 | 0.430 | 91 |
| 5L 920 | 7.11 | 0.434 | 92 |
| 5L 940 | 7.24 | 0.444 | 94 |
| 5L 960 | 7.37 | 0.453 | 96 |
| 5L 970 | 7.43 | 0.458 | 97 |
| 5L 980 | 7.50 | 0.463 | 98 |
| 5L 990 | 7.57 | 0.467 | 99 |
| 5L 1000 | 7.63 | 0.472 | 100 |

Variable Speed Belt

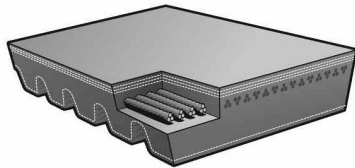

Power transmission belt for variable speed pulleys having separable parts.

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| 1228V255 | 5.78 | 0.205 | 663 |
| 1422V270 | 5.03 | 0.166 | 701 |
| 1422V290 | 5.27 | 0.178 | 752 |
| 1422V300 | 5.38 | 0.184 | 777 |
| 1422V330 | 5.74 | 0.202 | 853 |
| 1422V340 | 5.86 | 0.208 | 879 |
| 1422V360 | 6.09 | 0.220 | 930 |
| 1422V400 | 6.55 | 0.245 | 1031 |
| 1422V420 | 6.78 | 0.257 | 1082 |
| 1422V440 | 7.01 | 0.270 | 1133 |
| 1422V460 | 7.24 | 0.282 | 1184 |
| 1422V466 | 7.30 | 0.286 | 1199 |
| 1422V470 | 7.35 | 0.288 | 1209 |
| 1422V480 | 7.46 | 0.294 | 1234 |
| 1422V540 | 8.13 | 0.331 | 1387 |
| 1422V600 | 8.79 | 0.368 | 1539 |
| 1422V660 | 9.44 | 0.405 | 1692 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|
| 1422V720 | 10.07 | 0.442 | 1844 |
| 1422V780 | 10.70 | 0.479 | 1996 |
| 1430V215 | 4.37 | 0.153 | 556 |
| 1626V262 | 5.56 | 0.166 | 681 |
| 1626V293 | 6.01 | 0.186 | 759 |
| 1626V304 | 6.17 | 0.193 | 787 |
| 1626V330 | 6.53 | 0.210 | 853 |
| 1626V339 | 6.66 | 0.215 | 876 |
| 1626V384 | 7.26 | 0.244 | 991 |
| 1626V428 | 7.83 | 0.272 | 1102 |
| 1626V440 | 7.98 | 0.279 | 1133 |
| 1626V513 | 8.86 | 0.326 | 1318 |
| 1626V517 | 8.90 | 0.328 | 1328 |
| 1626V604 | 9.87 | 0.383 | 1549 |
| 1626V700 | 10.82 | 0.444 | 1793 |
| 1628V210 | 4.79 | 0.153 | 554 |
| 1628V315 | 6.32 | 0.185 | 813 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|----------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| 1822V328 | 6.39 | 0.216 | 848 | 1930V600 | 12.96 | 0.663 | 1544 |
| 1828V368 | 7.71 | 0.242 | 953 | 1930V641 | 13.74 | 0.709 | 1648 |
| 1922V256 | 7.41 | 0.184 | 665 | 1930V691 | 14.73 | 0.764 | 1775 |
| 1922V277 | 7.70 | 0.199 | 719 | 1930V750 | 15.94 | 0.829 | 1925 |
| 1922V282 | 7.76 | 0.203 | 732 | 1930V791 | 16.82 | 0.873 | 2029 |
| 1922V298 | 7.99 | 0.214 | 772 | 1930V891 | 19.06 | 0.985 | 2283 |
| 1922V302 | 8.05 | 0.217 | 782 | 1930V991 | 21.46 | 1.095 | 2537 |
| 1922V321 | 8.32 | 0.231 | 831 | 1930V1091 | 24.00 | 1.206 | 2791 |
| 1922V332 | 8.48 | 0.239 | 859 | 1930V1191 | 26.70 | 1.316 | 3045 |
| 1922V363 | 8.94 | 0.261 | 937 | 2226V307 | 11.14 | 0.350 | 795 |
| 1922V381 | 9.22 | 0.274 | 983 | 2230V266 | 10.53 | 0.135 | 701 |
| 1922V386 | 9.29 | 0.277 | 996 | 2230V275 | 10.67 | 0.140 | 724 |
| 1922V403 | 9.56 | 0.290 | 1039 | 2230V326 | 11.42 | 0.165 | 853 |
| 1922V417 | 9.78 | 0.300 | 1074 | 2322V364 | 12.65 | 0.428 | 942 |
| 1922V426 | 9.93 | 0.356 | 1097 | 2322V396 | 13.47 | 0.466 | 1024 |
| 1922V443 | 10.20 | 0.361 | 1140 | 2322V421 | 14.10 | 0.495 | 1087 |
| 1922V454 | 10.38 | 0.383 | 1168 | 2322V441 | 14.60 | 0.519 | 1138 |
| 1922V460 | 10.48 | 0.388 | 1184 | 2322V481 | 15.58 | 0.566 | 1240 |
| 1922V484 | 10.89 | 0.408 | 1245 | 2322V486 | 15.71 | 0.571 | 1252 |
| 1922V526 | 11.61 | 0.440 | 1351 | 2322V521 | 16.55 | 0.613 | 1341 |
| 1922V544 | 11.93 | 0.455 | 1397 | 2322V541 | 17.03 | 0.636 | 1392 |
| 1922V604 | 13.04 | 0.505 | 1549 | 2322V601 | 18.43 | 0.707 | 1544 |
| 1922V630 | 13.53 | 0.527 | 1615 | 2322V621 | 18.89 | 0.730 | 1595 |
| 1922V646 | 13.84 | 0.540 | 1656 | 2322V661 | 19.80 | 0.777 | 1697 |
| 1922V666 | 14.23 | 0.557 | 1707 | 2322V681 | 20.25 | 0.801 | 1748 |
| 1922V686 | 14.63 | 0.574 | 1758 | 2322V701 | 20.69 | 0.824 | 1798 |
| 1922V706 | 15.03 | 0.590 | 1808 | 2322V721 | 21.12 | 0.848 | 1849 |
| 1922V726 | 15.44 | 0.607 | 1859 | 2322V801 | 22.83 | 0.942 | 2052 |
| 1922V751 | 15.97 | 0.628 | 1923 | 2322V826 | 23.35 | 0.971 | 2116 |
| 1922V756 | 16.07 | 0.632 | 1935 | 2322V846 | 23.75 | 0.995 | 2167 |
| 1922V806 | 17.15 | 0.674 | 2062 | 2322V886 | 24.56 | 1.042 | 2268 |
| 1922V846 | 18.03 | 0.708 | 2164 | 2322V921 | 25.25 | 1.083 | 2357 |
| 1922V891 | 19.06 | 0.745 | 2278 | 2322V1001 | 26.77 | 1.177 | 2560 |
| 1922V966 | 20.84 | 0.808 | 2469 | 2322V1061 | 27.87 | 1.247 | 2713 |
| 1926V250 | 7.33 | 0.455 | 658 | 2326V310 | 11.24 | 0.355 | 800 |
| 1926V275 | 7.67 | 0.501 | 719 | 2326V359 | 12.52 | 0.754 | 930 |
| 1930V366 | 8.99 | 0.404 | 950 | 2330V273 | 10.26 | 0.249 | 711 |
| 1930V375 | 9.13 | 0.415 | 973 | 2426V343 | 13.42 | 0.531 | 889 |
| 1930V400 | 9.51 | 0.442 | 1036 | 2428V707 | 22.20 | 1.095 | 1814 |
| 1930V425 | 9.91 | 0.470 | 1100 | 2430V297 | 12.24 | 0.460 | 772 |
| 1930V431 | 10.01 | 0.476 | 1115 | 2436V331 | 13.12 | 0.512 | 859 |
| 1930V491 | 11.01 | 0.543 | 1267 | 2526V314 | 16.16 | 0.486 | 813 |
| 1930V530 | 11.68 | 0.586 | 1367 | 2530V309 | 16.00 | 0.484 | 780 |
| 1930V541 | 11.88 | 0.598 | 1394 | 2530V470 | 21.27 | 0.736 | 1222 |
| 1930V591 | 12.79 | 0.653 | 1521 | 2530V490 | 21.94 | 0.767 | 1273 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| 2530V530 | 23.27 | 0.830 | 1374 | 2926V521 | 26.28 | 0.617 | 1344 |
| 2530V550 | 23.94 | 0.861 | 1425 | 2926V546 | 27.25 | 0.647 | 1407 |
| 2530V575 | 24.78 | 0.900 | 1488 | 2926V574 | 28.33 | 0.680 | 1478 |
| 2530V595 | 25.45 | 0.931 | 1539 | 2926V586 | 28.79 | 0.694 | 1509 |
| 2530V610 | 25.96 | 0.955 | 1577 | 2926V606 | 29.55 | 1.039 | 1560 |
| 2530V630 | 26.63 | 0.986 | 1628 | 2926V616 | 29.93 | 1.056 | 1585 |
| 2530V660 | 27.65 | 1.033 | 1704 | 2926V636 | 30.69 | 1.090 | 1636 |
| 2530V670 | 27.99 | 1.049 | 1730 | 2926V646 | 31.06 | 1.107 | 1661 |
| 2530V690 | 28.68 | 1.080 | 1781 | 2926V666 | 31.81 | 1.142 | 1712 |
| 2530V700 | 29.02 | 1.096 | 1806 | 2926V686 | 32.55 | 1.176 | 1763 |
| 2530V730 | 30.05 | 1.143 | 1882 | 2926V706 | 33.29 | 1.210 | 1814 |
| 2530V740 | 30.39 | 1.158 | 1908 | 2926V726 | 34.02 | 1.245 | 1864 |
| 2530V750 | 30.74 | 1.174 | 1933 | 2926V776 | 35.82 | 1.330 | 1991 |
| 2530V790 | 32.12 | 1.237 | 2035 | 2926V786 | 36.18 | 1.347 | 2017 |
| 2530V840 | 33.86 | 1.315 | 2162 | 2926V834 | 37.88 | 1.430 | 2139 |
| 2530V890 | 35.61 | 1.393 | 2289 | 2926V856 | 38.65 | 1.467 | 2195 |
| 2530V934 | 37.16 | 1.462 | 2400 | 2926V891 | 39.86 | 1.527 | 2283 |
| 2530V990 | 39.15 | 1.549 | 2543 | 2926V906 | 40.37 | 1.553 | 2322 |
| 2530V1090 | 42.73 | 1.706 | 2797 | 2926V966 | 42.40 | 1.656 | 2474 |
| 2530V1190 | 46.37 | 1.863 | 3051 | 2926V1006 | 43.72 | 1.192 | 2576 |
| 2626V369 | 15.81 | 0.435 | 955 | 3226V392 | 20.35 | 1.252 | 1011 |
| 2626V388 | 16.22 | 0.457 | 1006 | 3226V395 | 20.48 | 1.262 | 1024 |
| 2630V345 | 15.48 | 0.123 | 909 | 3226V400 | 20.70 | 1.278 | 1036 |
| 2636V332 | 15.39 | 1.142 | 861 | 3226V439 | 22.41 | 1.402 | 1135 |
| 2822V778 | 32.69 | 1.294 | 1996 | 3226V450 | 22.89 | 1.437 | 1163 |
| 2826V412 | 19.11 | 0.630 | 1067 | 3226V465 | 23.55 | 1.485 | 1201 |
| 2826V452 | 20.54 | 0.691 | 1168 | 3226V505 | 25.28 | 1.613 | 1303 |
| 2830V337 | 16.46 | 0.432 | 876 | 3226V514 | 25.67 | 1.642 | 1326 |
| 2830V363 | 17.38 | 0.465 | 940 | 3226V545 | 27.00 | 1.740 | 1405 |
| 2830V366 | 17.48 | 0.469 | 945 | 3226V585 | 28.70 | 1.868 | 1506 |
| 2830V367 | 17.52 | 0.470 | 953 | 3226V603 | 29.46 | 1.926 | 1552 |
| 2830V393 | 18.44 | 0.504 | 1016 | 3226V663 | 31.98 | 2.118 | 1704 |
| 2830V396 | 18.54 | 0.508 | 1029 | 3226V723 | 34.47 | 2.309 | 1857 |
| 2830V422 | 19.47 | 0.541 | 1090 | 3226V783 | 36.93 | 2.500 | 2009 |
| 2830V428 | 19.68 | 0.549 | 1102 | 3226V843 | 39.35 | 2.692 | 2162 |
| 2836V343 | 16.67 | 0.524 | 892 | 3226V903 | 41.74 | 2.884 | 2314 |
| 2836V361 | 17.31 | 0.551 | 937 | 3226V963 | 44.10 | 3.075 | 2466 |
| 2836V380 | 17.98 | 0.581 | 986 | 3226V1023 | 46.43 | 3.267 | 2619 |
| 2926V366 | 20.07 | 0.434 | 950 | 3226V1083 | 48.73 | 3.459 | 2771 |
| 2926V400 | 21.46 | 0.474 | 1036 | 3230V419 | 21.54 | 0.690 | 1095 |
| 2926V426 | 22.51 | 0.505 | 1102 | 3230V560 | 27.64 | 0.923 | 1448 |
| 2926V471 | 24.31 | 0.558 | 1217 | 3230V710 | 33.93 | 1.170 | 1831 |
| 2926V477 | 24.55 | 0.565 | 1232 | 3236V342 | 18.13 | 0.564 | 894 |
| 2926V486 | 24.90 | 0.576 | 1255 | 3236V369 | 19.33 | 0.608 | 963 |
| 2926V491 | 25.10 | 0.582 | 1267 | 3236V432 | 22.11 | 0.712 | 1118 |

| Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) | Belt No. | List Price | Wt.(Approx)kg | Outside Length(mm) |
|-----------|------------|---------------|--------------------|-----------|------------|---------------|--------------------|
| 3326V478 | 24.11 | 0.788 | 1237 | 4430V1150 | 80.95 | 3.757 | 2949 |
| 3432V450 | 21.62 | 0.920 | 1158 | 4436V329 | 23.97 | 1.290 | 864 |
| 3432V456 | 22.83 | 0.932 | 1179 | 4436V525 | 42.13 | 2.058 | 1361 |
| 3432V480 | 26.74 | 0.981 | 1240 | 4436V551 | 44.32 | 2.160 | 1427 |
| 3432V484 | 27.24 | 0.989 | 1250 | 4436V561 | 45.15 | 2.199 | 1453 |
| 3432V534 | 29.88 | 1.091 | 1377 | 4436V576 | 46.38 | 2.258 | 1491 |
| 3636V479 | 26.61 | 0.979 | 1237 | 4436V646 | 51.91 | 2.532 | 1669 |
| 3726V558 | 28.77 | 1.140 | 1440 | 4626V596 | 42.56 | 2.218 | 1547 |
| 3826V459 | 33.15 | 0.928 | 1191 | 4630V650 | 63.76 | 2.419 | 1684 |
| 3826V465 | 33.59 | 0.940 | 1207 | 4630V663 | 67.67 | 2.467 | 1717 |
| 3830V510 | 36.71 | 1.131 | 1326 | 4630V683 | 72.79 | 2.542 | 1758 |
| 3830V587 | 41.22 | 1.180 | 1516 | 4630V733 | 80.81 | 2.728 | 1887 |
| 3836V418 | 29.97 | 0.840 | 1087 | 4636V613 | 50.09 | 2.281 | 1590 |
| 3836V426 | 30.61 | 0.856 | 1107 | 4830V602 | 44.47 | 1.908 | 1562 |
| 3836V654 | 44.32 | 1.314 | 1687 | 4830V653 | 47.55 | 2.070 | 1687 |
| 3836V734 | 47.00 | 1.475 | 1890 | 4830V699 | 50.29 | 2.215 | 1816 |
| 3836V794 | 48.28 | 1.596 | 2042 | 4830V750 | 53.30 | 2.377 | 1938 |
| 4030V538 | 38.99 | 1.429 | 1392 | 4836V588 | 43.62 | 2.092 | 1521 |
| 4036V541 | 39.41 | 1.202 | 1402 | 4836V608 | 44.84 | 2.164 | 1570 |
| 4036V574 | 43.87 | 1.275 | 1483 | 4836V618 | 45.44 | 2.199 | 1598 |
| 4230V556 | 42.76 | 1.236 | 1443 | 4836V642 | 46.89 | 2.285 | 1659 |
| 4230V605 | 45.32 | 1.344 | 1562 | 4836V655 | 47.67 | 2.331 | 1692 |
| 4230V653 | 47.62 | 1.451 | 1684 | 4836V670 | 48.57 | 2.384 | 1730 |
| 4430V510 | 40.84 | 1.666 | 1323 | 4836V710 | 50.94 | 2.527 | 1831 |
| 4430V548 | 44.07 | 1.790 | 1420 | 4836V750 | 53.30 | 2.669 | 1933 |
| 4430V555 | 44.65 | 1.813 | 1438 | 4836V800 | 56.20 | 2.847 | 2060 |
| 4430V570 | 45.89 | 1.862 | 1476 | 4836V850 | 59.07 | 3.025 | 2187 |
| 4430V578 | 46.55 | 1.888 | 1496 | 4836V900 | 61.90 | 3.203 | 2314 |
| 4430V610 | 49.11 | 1.993 | 1577 | 4836V950 | 64.69 | 3.381 | 2441 |
| 4430V630 | 50.68 | 2.058 | 1628 | 4836V1000 | 67.44 | 3.559 | 2568 |
| 4430V660 | 52.97 | 2.156 | 1704 | 4836V1060 | 70.70 | 3.772 | 2720 |
| 4430V670 | 53.72 | 2.188 | 1730 | 4836V1120 | 73.90 | 3.986 | 2873 |
| 4430V690 | 55.20 | 2.254 | 1781 | 4836V1180 | 77.04 | 4.199 | 3025 |
| 4430V700 | 55.93 | 2.287 | 1806 | 5130V732 | 82.78 | 3.404 | 1887 |
| 4430V718 | 57.22 | 2.345 | 1852 | 5130V799 | 84.66 | 3.716 | 2062 |
| 4430V730 | 58.06 | 2.384 | 1882 | 5228V930 | 114.36 | 3.393 | 2392 |
| 4430V740 | 58.76 | 2.417 | 1908 | 5230V734 | 105.83 | 2.678 | 1897 |
| 4430V760 | 60.13 | 2.482 | 1958 | 5230V867 | 108.06 | 3.163 | 2233 |
| 4430V767 | 60.61 | 2.506 | 1976 | 5430V783 | 94.50 | 3.985 | 2029 |
| 4430V790 | 62.14 | 2.580 | 2035 | 5636V750 | 95.97 | 2.919 | 1941 |
| 4430V850 | 65.94 | 2.776 | 2187 | 5636V774 | 93.60 | 3.012 | 2002 |
| 4430V910 | 69.48 | 2.972 | 2339 | 5636V845 | 96.64 | 3.289 | 2182 |
| 4430V970 | 72.75 | 3.168 | 2492 | 5830V756 | 94.71 | 6.493 | 1956 |
| 4430V1030 | 75.75 | 3.365 | 2644 | 6136V756 | 91.80 | 6.739 | 1953 |
| 4430V1090 | 78.48 | 3.561 | 2797 | | | | |

Minimum order quantity

Industrial Belt

| Generic Belt Type | | Section | Size Range (Inch) | Min. Qty (pcs or multiples) | |
|-------------------|----------------------|----------------------|-------------------|-----------------------------------|-----------------------------------|
| | | | | Wrapped(~110") Raw Edge(~120") | Wrapped(111"~) Raw Edge(121"~) |
| Classical V-Belt | Wrapped Type | M | 11 ~ 120 | 90 | 30 |
| | | A | 18 ~ 360 | 75 | 25 |
| | | B | 22 ~ 530 | 60 | 20 |
| | | C | 33 ~ 600 | 32 | 20 |
| | | D | 80 ~ 600 | 24 | 14 |
| | | E | 110 ~ 600 | 12 | 10 |
| | Raw Edge Cogged Type | HM | 21 ~ 120 | 90 | - |
| | | AX | 21 ~ 200 | 70 | 35 |
| | | BX | 23 ~ 200 | 55 | 25 |
| | | CX | 39 ~ 200 | 40 | 20 |
| Narrow V-Belt | Wrapped Type | 3V | 20 ~ 270 | 90 | 30 |
| | | 5V | 50 ~ 355 | 60 | 25 |
| | | 8V | 100 ~ 500 | 30 | 15 |
| | | SPZ | 500 ~ 6850 mm | 90 | 30 |
| | | SPA | 500 ~ 7800 mm | 75 | 25 |
| | | SPB | 1250 ~ 8000 mm | 60 | 25 |
| | | SPC | 2000 ~ 12500 mm | 32 | 20 |
| | | Raw Edge Cogged Type | 3VX | 25 ~ 200 | 95 |
| | 5VX | | 50 ~ 200 | 55 | 30 |
| | SPZX | | 560 ~ 5050 mm | 95 | 45 |
| | SPAX | | 732 ~ 5050 mm | 70 | 35 |
| | SPBX | | 1250 ~ 5050 mm | 55 | 25 |
| | SPCX | | 2000 ~ 5050 mm | 40 | 20 |

Automotive Belt

| Generic Belt Type | | Section | Size Range (Inch) | Min. Q'ty (pcs or multiples) | |
|-------------------|--|---------|-------------------|-----------------------------------|--|
| | | | | Wrapped(~110") Raw Edge(~120") | |
| Raw Edge Belt | Raw Edge Cogged Type | HM | 21 ~ 120 | 85 | |
| | | AVX-10X | 25 ~ 120 | 90 | |
| | | AVX-13X | 25 ~ 120 | 70 | |
| | | BX | 35 ~ 120 | 55 | |
| | | CX | 60 ~ 120 | 40 | |
| | Raw Edge Laminated / Raw Edge Plain Type | HM | 21 ~ 120 | 85 | |
| | | A | 21 ~ 120 | 70 | |
| | | B | 23 ~ 120 | 55 | |
| | | | | | |

Agricultural Belt


| Generic Belt Type | | Section | Size Range (Inch) | Min. Q'ty (pcs or multiples) | |
|----------------------|----|----------|-------------------|-----------------------------------|-----------------------------------|
| | | | | Wrapped(~110") Raw Edge(~120") | Wrapped(111"~) Raw Edge(121"~) |
| Wrapped Type | LA | 25 ~ 100 | 75 | - | |
| | LB | 25 ~ 250 | 60 | 20 | |
| | LC | 45 ~ 250 | 32 | 16 | |
| Raw Edge Cogged Type | LA | | 65 | | |
| | LB | 22 ~ 100 | 50 | - | |
| | LC | | 38 | | |

Precautions for Installing & Using Industrial Belt


Precautions for Installing Industrial Belt



- Before installing, check your clothing to ensure that there are no loose parts, including loose hair, gloves, or clothing that may be pulled into the rotating parts, including the pulley belt.
- Always install safety cover over rotating parts, including the pulley.

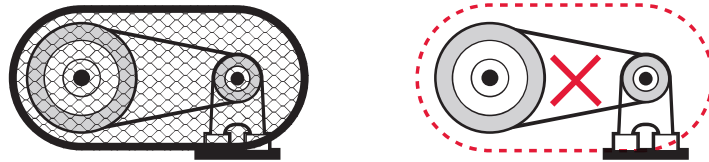


- Always ensure that the belt fully stops before checking, repairing, or replacing a belt.
- Ensure the power switch is not turned on during the belt inspection, repair or replacement.
- Fix the machine before operating it if it may rock when the belt is removed.
- Ensure that the same type belt or pulley replace an existing one.
- Do not cut the belt with a knife or scissors while the belt is still under tension. It may spring out to hurt nearby people.
- Do not touch the belt or pulley immediately after it stops. Your hand may be burnt
- Mount the belt from the driving pulley to replace the belt after loosening its tension. Forced mounting may cause early breakage.

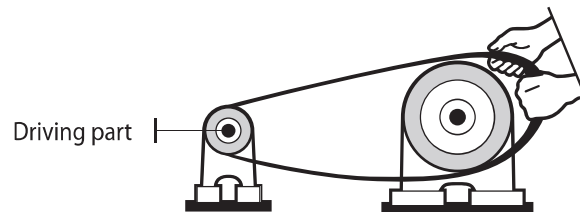




- Align the belt to the pulley center. Otherwise, it will shorten the belt life as one side will wear heavily.

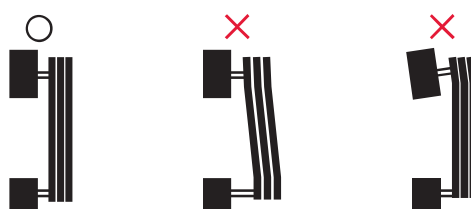

- Install the belt according to the instructions in the catalog or design specifications.
- Inadequate mounting may result in early breakage of the belt or the axis.

- Do not apply too much force to install a belt, for example, with a lever.

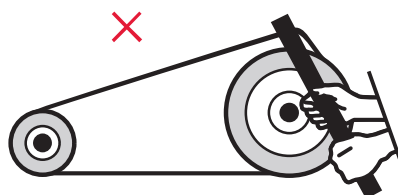

- Ensure the belt is duly placed in the pulley groove.




Precautions in using industrial belt



- Never hang or pull an article with a belt.
- Never use the belt for purposes other than power transmission.



- Remove oil, grease or dust from the pulley groove. Rough or damaged pulley surface may cause excessive wear of the belt.
- Never use the belt for insulation.
- Always select a pulley that meets the specifications.
- Keep the belt or pulley from water, oil, chemical, paint etc. They may cause early breakage.
- Do not use a new and old belt together. It will cause the belt break early as the weight will be loaded on the new one.

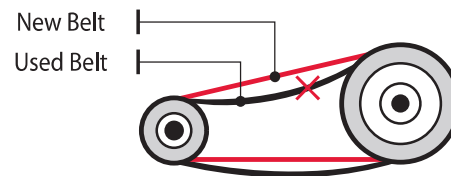

- Maintain the defined tension in mounting or using the belt. Wrong tension will cause noise or breakage.
- Do not burn used belt as it generates harmful gas.
- Do not modify the belt as it may hurt the quality and performance.

Precautions for Mounting and Using Automotive Belt


Precautions for Mounting Automotive Belt




- Check your clothing to ensure that there are no loose parts, including loose hair, gloves, or clothing that may be pulled into the rotating parts, including the pulley belt.
- Always ensure that the engine is turned off and the belt fully stops before checking, repairing, or replacing a belt.
- Ensure the power switch is not turned on during the belt inspection, repair or replacement.



- Ensure that a same type belt or pulley replace the existing one.
- Do not cut the belt with a knife or scissors while the belt is still under tension. It may spring out to hurt nearby people.
- Align the belt to the pulley center. Otherwise, it will shorten the belt life as one side will wear heavily.

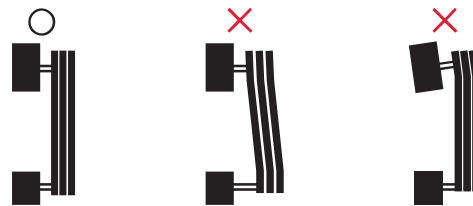

- Do not touch the belt or pulley immediately after it stops. Your hand may be burnt
- Reduce the belt tension before replacing it with a belt. Inadequate mounting with wrong tension will cause early wear or breakage.
- Maintain the defined tension in mounting or using the belt. Wrong tension will cause noise or breakage.
- Replace all belt on one pulley at the same time. Otherwise, it will cause early wear or breakage.

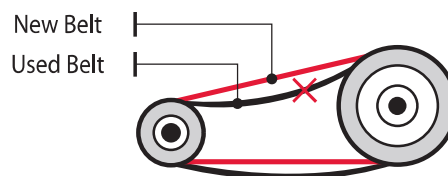

Precautions for Using Automotive Belt



- Never hang or pull an article with a belt.
- Never use the belt for purposes other than power transmission.



- Remove oil, grease or dust from the pulley groove. Rough or damaged pulley surface may cause excessive wear of the belt.
- Do not use the belt for insulation.
- Keep the belt or pulley from water, oil, chemical, paint etc.
- Do not burn used belt as it generates harmful gas.

Precautions for Handling or Storing Automotive Belt



Observe the following in handling or storing automotive belt:

- Do not fold a belt by applying excessive force. It will tear the lining materials.
- Keep belt away from direct sunlight.
- Do not place heavy articles on top belt under transport or storage.
- Scratch or scar on the belt surface will cause early breakage.

Request for Industrial Belt Design

DATE Day /Month /Year

| | | | |
|---|--|--|-----|
| Company Name | | | |
| Equipment Description | | <input type="checkbox"/> New equipment <input type="checkbox"/> Existing equipment | |
| Category | Driving part (Motor) | Driven part (Machine) | |
| Type of driven machine | | | |
| Horsepower | (Normal) | (Maximum) | |
| RPM of driving parts | RPM | Minimum | RPM |
| | | Minimum | RPM |
| Pulley length <input type="checkbox"/> Outside <input type="checkbox"/> Pitch dia. | mm | | mm |
| Pulley width | mm | | mm |
| Distance between pulley center | Maximum allowed distance : | | mm |
| | Minimum allowed distance : | | mm |
| Tension pulley | <input type="checkbox"/> N/A <input type="checkbox"/> Internal <input type="checkbox"/> External <input type="checkbox"/> Loose part <input type="checkbox"/> Tight part | | |
| | <input type="checkbox"/> Outside diameter : | | |

Request

| | | | | |
|-----------------------|---|--------------------------------|-------------------------------------|-------------------------------|
| Operation hours | Daily standard : | hours | Annual standard | days |
| Ambient temperature | Minimum : | °C | Maximum : | °C |
| Driven weight | <input type="checkbox"/> Fixed (Stable) <input type="checkbox"/> Vibration (Unstable) | | <input type="checkbox"/> Shock | |
| Exposure conditions | <input type="checkbox"/> Oil | <input type="checkbox"/> Water | <input type="checkbox"/> Acid | <input type="checkbox"/> Dust |
| Operation frequency | <input type="checkbox"/> Frequent repeat of stop/run | | <input type="checkbox"/> Others () | |
| Expected life | | | | |
| Data of existing belt | Manufacturer : | | Type : | |
| | Specification : | Quantity : | Life : | |
| | Problems experienced : | | | |



DRB Industrial Co., Ltd.

Sales Office

DRB HQ / Overseas Sales Team

28, Gongdandong-ro 55beon-gil, Geumjeong-gu, Busan, Korea
Tel. +82-51-520-9104 Fax. +82-51-523-2537

DRB America

16811 Knott Ave. La Mirada, CA 90638, USA
Tel. +1-714-739-2922 Toll Free. +1-888-860-4450 Fax. +1-714-739-2925

DRB Indonesia

Graha Pratama Lt.3, Jl. Letjen M. T. Haryono Kav.15, Tebet Barat, Jakarta 12810 Indonesia
Tel. +62-21-8379-7800 Fax. +62-21-8379-7799

DRB China

Room 503 Zhidi Building, No 3217, Hongmei Rd, Shanghai, 201103, China
Tel. +86-21-5422-5691 Fax. +86-21-5422-5697

DRB Japan

7F, CR Hakata Bldg., 1-8-6, Hakataeki-minami, Hakata-ku, Fukuoka-city, 812-0016, Japan
Tel. +81-92-481-7303 Fax. +81-92-481-7307

DRB Vietnam

Tang4, No.17, 172/1 Nguyen Tuan Street, Nhan Chinh Ward, Thanh Xuan District, Hanoi, Vietnam
Tel. +84-4-6285-4028 Fax. +84-4-6285-4029

- ※ No content in this catalog may be copied without our prior consent under the intellectual Property Protection Law.
- ※ Please be sure to check the current specifications of a product as those stated in this catalog may be changed without a prior notice.



ویرا پرداز آروین پاسارگاد

با مدیریت خانم مهندس احمدی



جهت مشاوره

با کارشناسان فنی

با ما در ارتباط باشید



021 - 91001377



0935 125 90 98